



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**EILEEN BIGELOW**  
Machine Id  
**[EILEEN BIGELOW] 004 588445-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (200 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06221844</b>	MW06151281	MW06120299
Sample Date		Client Info		<b>01 Jun 2024</b>	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		<b>34998</b>	33546	32818
Oil Age	hrs	Client Info		<b>34998</b>	33546	32818
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>54</b>	41	41
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	4	4
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m	>50	<b>6</b>	6	5
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	3
Water	%	ASTM D6304	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>19</b>	18	21
Boron	ppm	ASTM D5185m	20	<b>8</b>	8	8
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	3	4
Manganese	ppm	ASTM D5185m		<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>4</b>	2	0
Calcium	ppm	ASTM D5185m	25	<b>38</b>	32	39
Phosphorus	ppm	ASTM D5185m	235	<b>269</b>	322	338
Zinc	ppm	ASTM D5185m		<b>16</b>	5	12
Sulfur	ppm	ASTM D5185m		<b>5092</b>	5535	6259
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.62</b>	0.52	0.55
Visc @ 40°C	cSt	ASTM D445	304	<b>300.2</b>	301	301

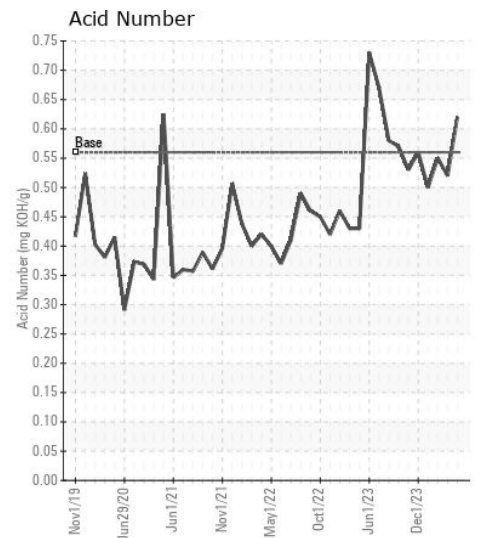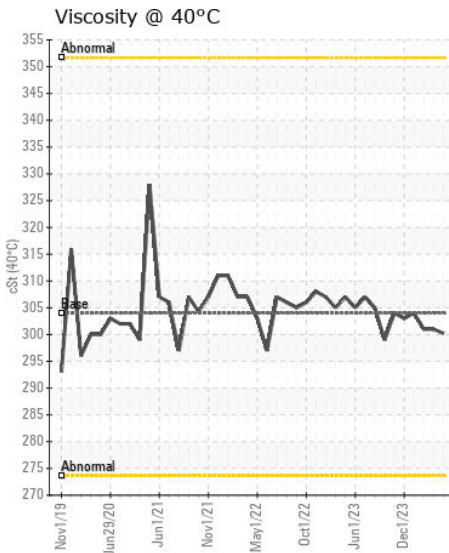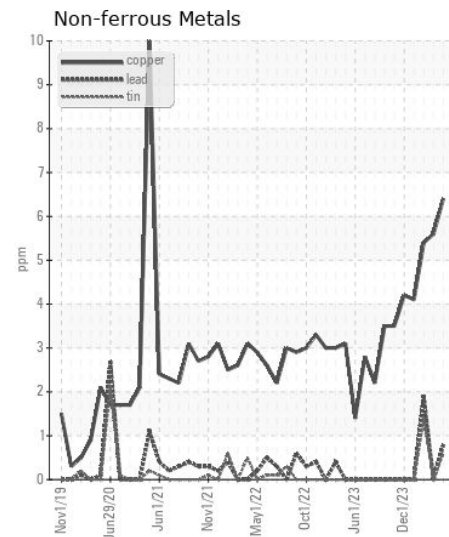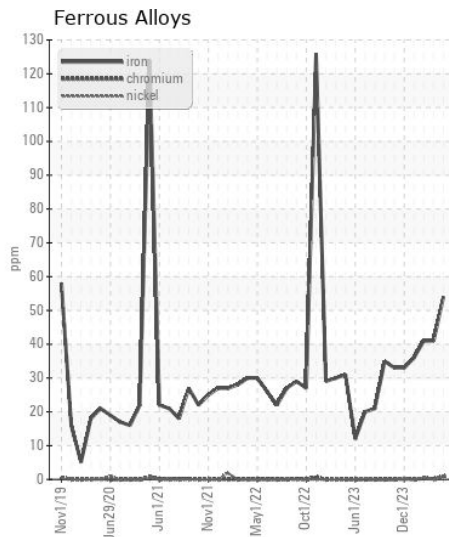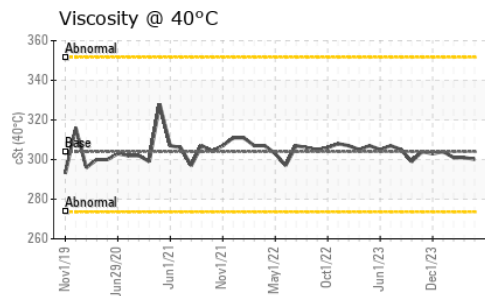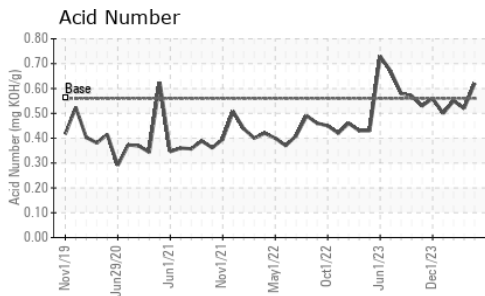

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW06221844 **Received** : 26 Jun 2024  
**Lab Number** : 06221844 **Tested** : 01 Jul 2024  
**Unique Number** : 11100041 **Diagnosed** : 01 Jul 2024 - Jonathan Hester  
**Test Package** : MAR 2 ( Additional Tests: KF )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: TONY HUCKABEE  
 tony.huckabee@ingrambarge.com  
 T: (270)415-4467  
 F: (615)695-3697