



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
EILEEN BIGELOW
Machine Id
[EILEEN BIGELOW] 005 588445-5
Component
Center Reduction Gear
Fluid
CHEVRON MEROPA 320 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06221846	MW06151282	MW06120298
Sample Date		Client Info		01 Jun 2024	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		35161	33709	32981
Oil Age	hrs	Client Info		35161	33709	32981
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	107	103	104
Chromium	ppm	ASTM D5185m	>10	1	<1	1
Nickel	ppm	ASTM D5185m	>10	1	0	<1
Titanium	ppm	ASTM D5185m		2	<1	1
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>25	7	8	8
Lead	ppm	ASTM D5185m	>100	2	<1	3
Copper	ppm	ASTM D5185m	>50	24	12	17
Tin	ppm	ASTM D5185m	>10	<1	0	2
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	11	10	11
Potassium	ppm	ASTM D5185m	>20	3	4	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		78	84	83
Boron	ppm	ASTM D5185m	20	4	4	5
Barium	ppm	ASTM D5185m		2	0	<1
Molybdenum	ppm	ASTM D5185m	0	5	4	5
Manganese	ppm	ASTM D5185m		2	0	1
Magnesium	ppm	ASTM D5185m		4	4	2
Calcium	ppm	ASTM D5185m	25	34	33	34
Phosphorus	ppm	ASTM D5185m	235	316	379	391
Zinc	ppm	ASTM D5185m		23	7	17
Sulfur	ppm	ASTM D5185m		4916	5380	6257
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.41	0.41	0.38
Visc @ 40°C	cSt	ASTM D445	304	307	311	311

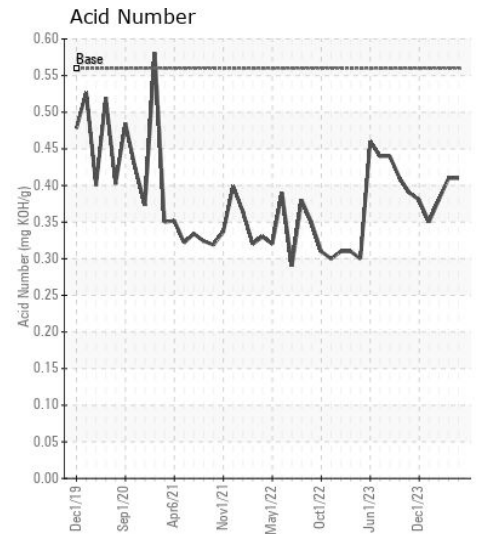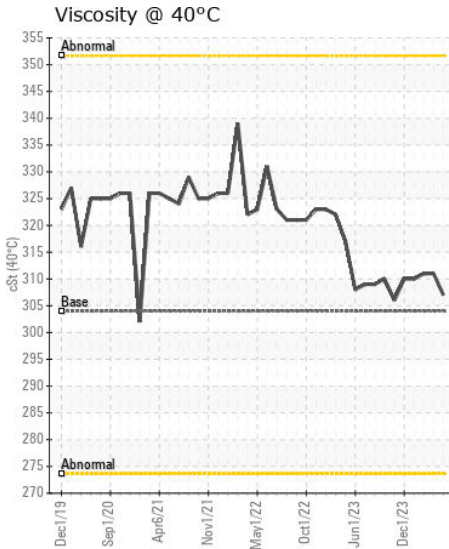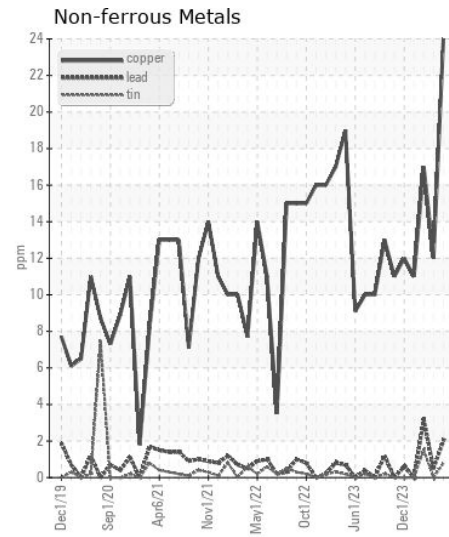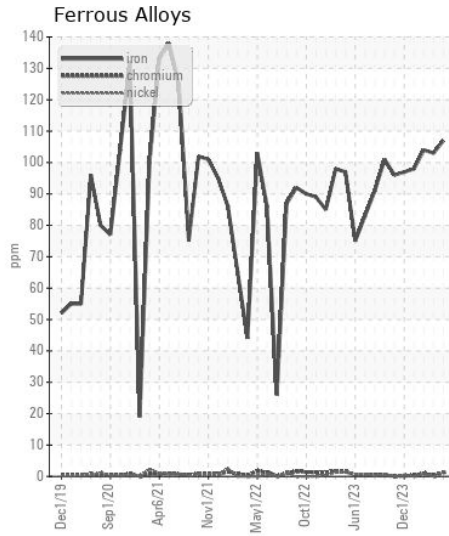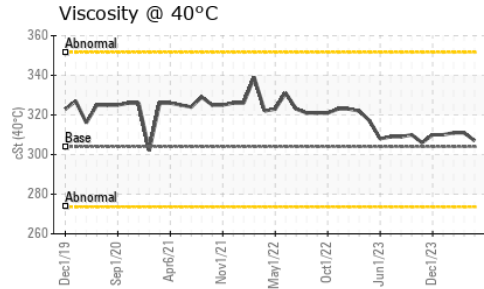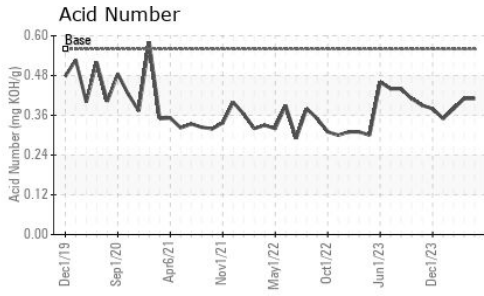

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW06221846
Lab Number : 06221846
Unique Number : 11100043
Test Package : MAR 2

Received : 26 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: TONY HUCKABEE
 tony.huckabee@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)