



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[STANLEY CONSTRUCTION]

Machine Id

VOLVO A45G 342655

Component

Axle

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002749	---	---
Sample Date		Client Info		24 Jun 2024	---	---
Machine Age	hrs	Client Info		8147	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	58	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>150	1	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>50	3	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		306	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		94	---	---
Phosphorus	ppm	ASTM D5185m		2265	---	---
Zinc	ppm	ASTM D5185m		35	---	---
Sulfur	ppm	ASTM D5185m		26430	---	---


Ferrous Alloys

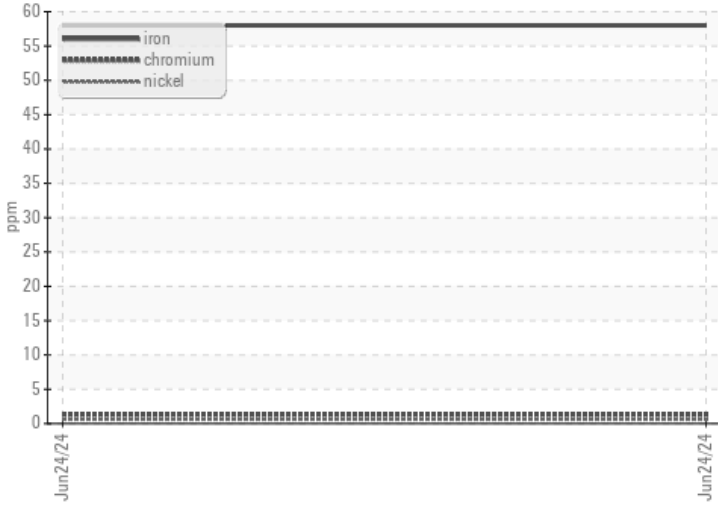

Non-ferrous Metals

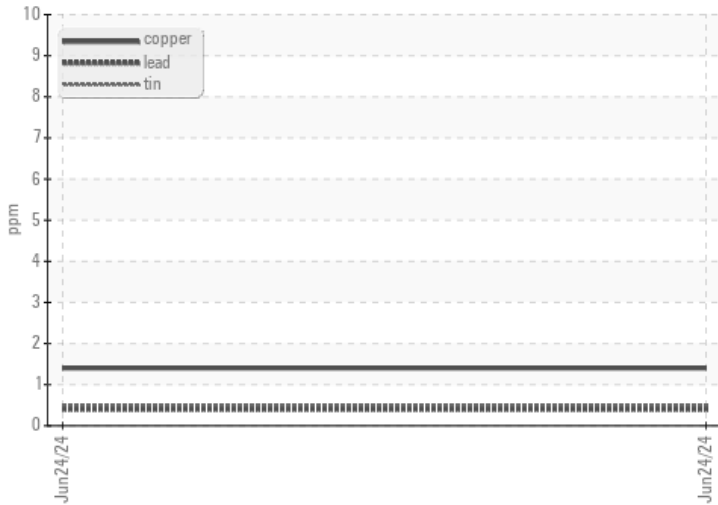

Viscosity @ 40°C

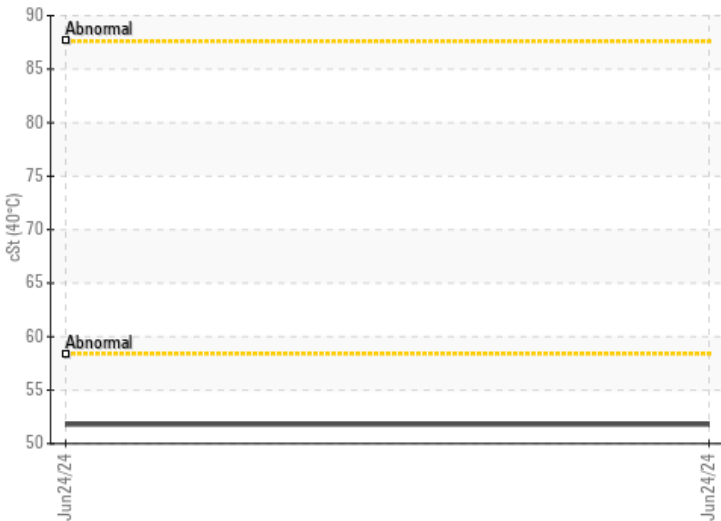

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002749
Lab Number : 06221880
Unique Number : 11100077
Test Package : CONST

Received : 26 Jun 2024
Tested : 29 Jun 2024
Diagnosed : 29 Jun 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (804)266-1611