



OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G A30G-302 (S/N 740188)
Component
Rear Right Hub
Fluid
MOBIL 75W90 (--- GAL)

RECOMMENDATION

We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0002557	TLY0001477	---
Sample Date		Client Info		21 Jun 2024	27 Jun 2023	---
Machine Age	hrs	Client Info		7489	6475	---
Oil Age	hrs	Client Info		7489	1475	---
Filter Age	hrs	Client Info		7489	1475	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				SEVERE	SEVERE	---

WEAR

Gear wear is indicated.

Iron	ppm	ASTM D5185m	>200	▲ 603	▲ 624	---
Chromium	ppm	ASTM D5185m	>10	8	8	---
Nickel	ppm	ASTM D5185m	>10	6	6	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m		2	<1	---
Lead	ppm	ASTM D5185m		<1	0	---
Copper	ppm	ASTM D5185m		44	38	---
Tin	ppm	ASTM D5185m		1	1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		11	14	---
Potassium	ppm	ASTM D5185m	>20	1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	---
Boron	ppm	ASTM D5185m		155	195	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		16	19	---
Magnesium	ppm	ASTM D5185m		2	0	---
Calcium	ppm	ASTM D5185m		44	● 44	---
Phosphorus	ppm	ASTM D5185m		2209	● 2408	---
Zinc	ppm	ASTM D5185m		48	● 33	---
Sulfur	ppm	ASTM D5185m		28202	25056	---

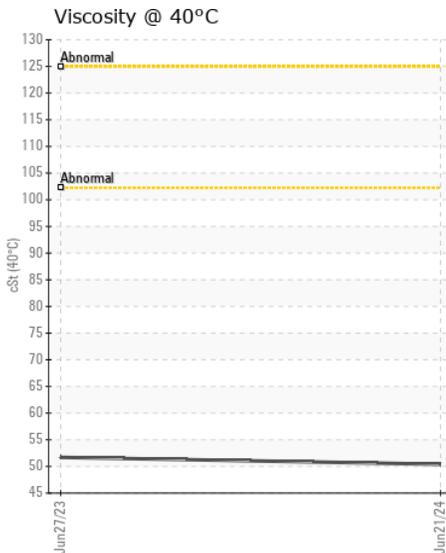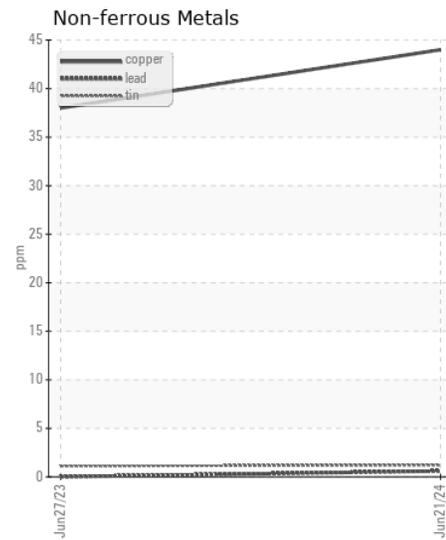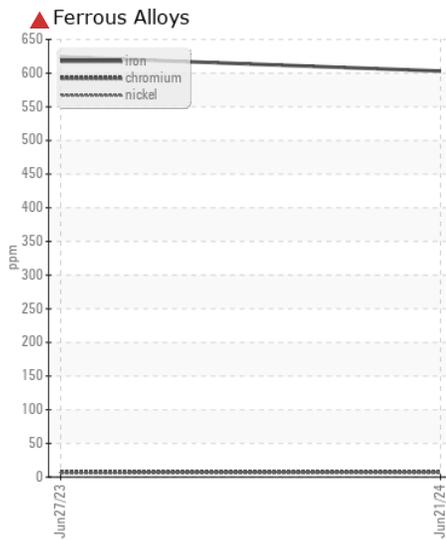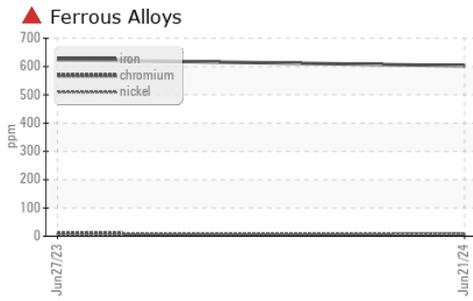

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0002557
Lab Number : 06221884
Unique Number : 11100081
Test Package : CONST

Received : 26 Jun 2024
Tested : 29 Jun 2024
Diagnosed : 29 Jun 2024 - Don Baldrige

GAINES & COMPANY
 112 WESTMINISTER RD
 REISTERSTOWN, MD
 US 21136

Contact: LANCE TANCRAITOR
 ltancraitor@gainesandco.com
 T: (410)833-9833

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: