



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G A30G-302 (S/N 740188)
Component
Front Left Hub
Fluid
MOBIL 75W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0002560	TLY0001768	---
Sample Date		Client Info		21 Jun 2024	27 Jun 2023	---
Machine Age	hrs	Client Info		7489	6475	---
Oil Age	hrs	Client Info		7489	1475	---
Filter Age	hrs	Client Info		7489	1475	---
Oil Changed		Client Info		Not Chngd	Not Chngd	---
Filter Changed		Client Info		Not Chngd	Not Chngd	---
Sample Status				ABNORMAL	SEVERE	---

WEAR

Gear wear is indicated.

Iron	ppm	ASTM D5185m	>200	▲ 449	▲ 469	---
Chromium	ppm	ASTM D5185m	>10	5	5	---
Nickel	ppm	ASTM D5185m	>10	5	5	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		0	<1	---
Lead	ppm	ASTM D5185m		<1	0	---
Copper	ppm	ASTM D5185m		43	35	---
Tin	ppm	ASTM D5185m		<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		8	7	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	2	---
Boron	ppm	ASTM D5185m		107	148	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		15	14	---
Magnesium	ppm	ASTM D5185m		1	0	---
Calcium	ppm	ASTM D5185m		97	● 36	---
Phosphorus	ppm	ASTM D5185m		2112	● 2340	---
Zinc	ppm	ASTM D5185m		48	● 25	---
Sulfur	ppm	ASTM D5185m		28636	25056	---

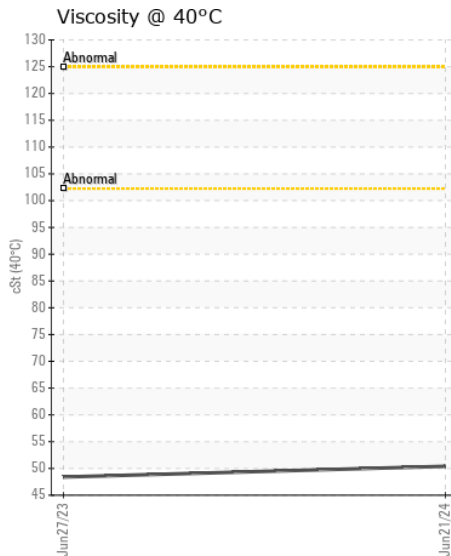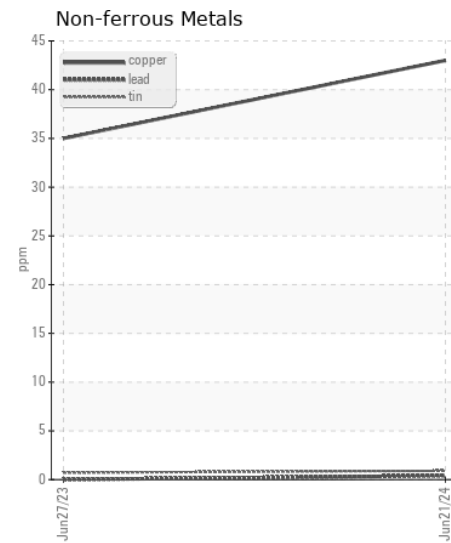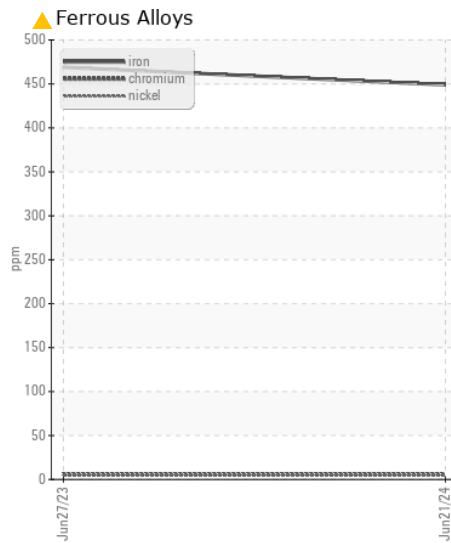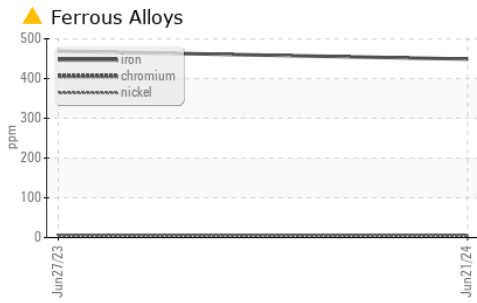

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0002560
Lab Number : 06221904
Unique Number : 11100101
Test Package : CONST
Received : 26 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Jonathan Hester

GAINES & COMPANY
 112 WESTMINSTER RD
 REISTERSTOWN, MD
 US 21136

Contact: LANCE TANCRAITOR
 ltancraitor@gainesandco.com
 T: (410)833-9833

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: