



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**STEVE GALLO**  
Machine Id  
**VOLVO PENTA A6380503**  
Component  
**Port Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (24 QTS)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA061893	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		267	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	4	---	---
Chromium	ppm	ASTM D5185m	>6	<1	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>95	<1	---	---
Copper	ppm	ASTM D5185m	>85	<1	---	---
Tin	ppm	ASTM D5185m	>9	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	8	---	---
Boron	ppm	ASTM D5185m	250	151	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	17	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	224	---	---
Calcium	ppm	ASTM D5185m	3000	1866	---	---
Phosphorus	ppm	ASTM D5185m	1150	1008	---	---
Zinc	ppm	ASTM D5185m	1350	1215	---	---
Sulfur	ppm	ASTM D5185m	4250	3735	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.0	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.3	---	---

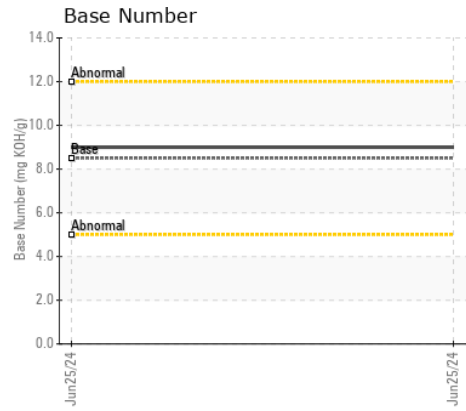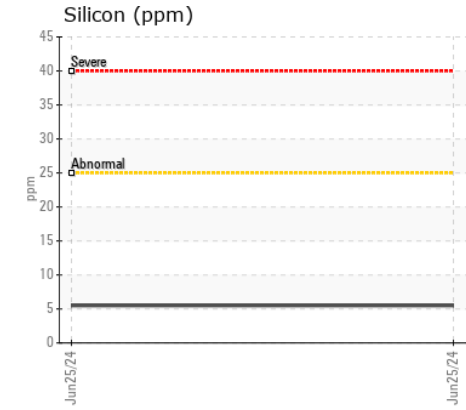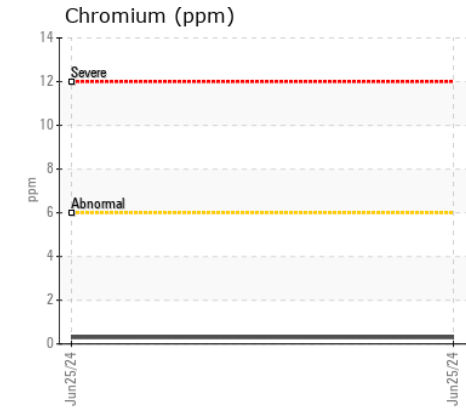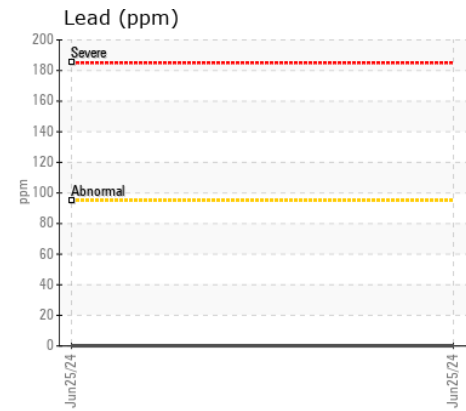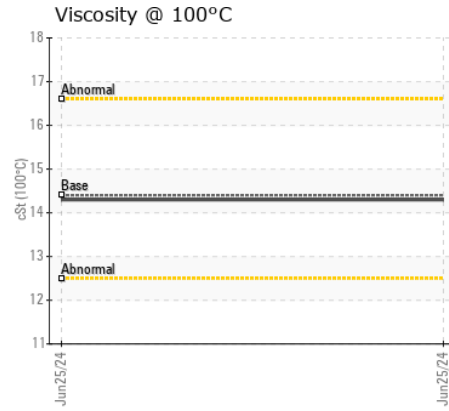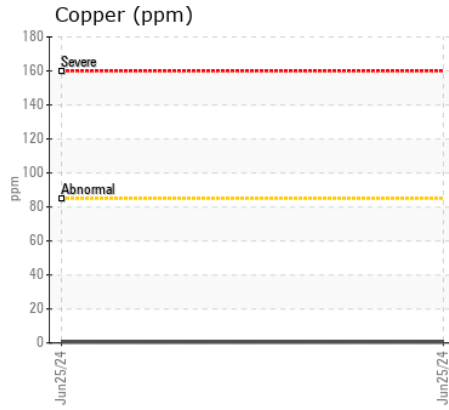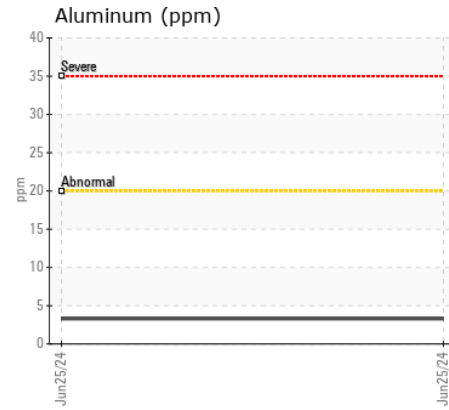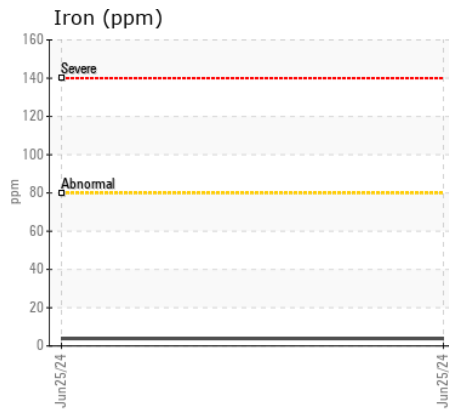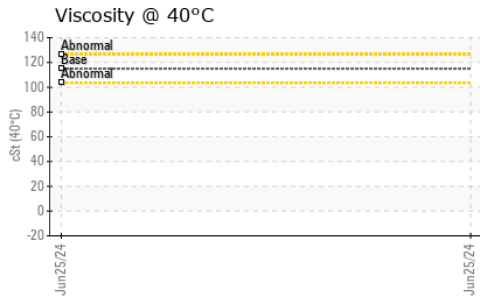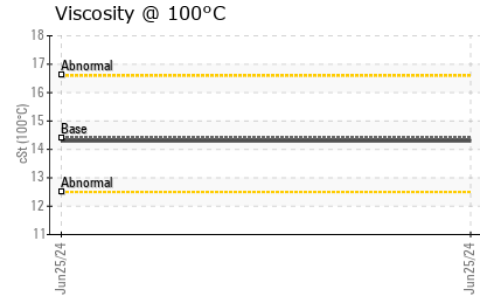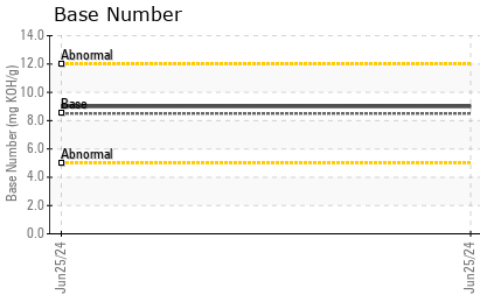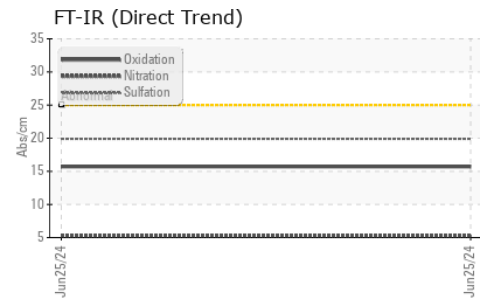

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA061893 **Received** : 27 Jun 2024  
**Lab Number** : 06221966 **Tested** : 27 Jun 2024  
**Unique Number** : 11100163 **Diagnosed** : 27 Jun 2024 - Doug Bogart  
**Test Package** : MOB 1 ( Additional Tests: TBN, KV40 )

**Mobile Marine Services Inc**  
 01032 Advance Rd South  
 EAST JORDAN, MI  
 US 49727  
 Contact: Duane Kujat  
 mobilemarine@twin-valley.net  
 T: Phone  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)