



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id
CCC 4010
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.













CONTAMINATION

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0007864	LW0008999	LW0008623
Sample Date		Client Info		24 Jun 2024	09 Apr 2024	27 Jan 2024
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	SEVERE	NORMAL
Iron	ppm	ASTM D5185m	>100	69	72	17
Chromium	ppm	ASTM D5185m	>20	3	4	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	2	2
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	5	5	2
Potassium	ppm	ASTM D5185m	>20	2	2	2
Fuel	%	ASTM D3524	>5	▲ 8.5	▲ 9.1	1.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	2.3	2.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	11.7	13.6	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.8	25.7	20.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>216	4	0	0
Boron	ppm	ASTM D5185m	250	3	<1	<1
Barium	ppm	ASTM D5185m	10	0	0	<1
Molybdenum	ppm	ASTM D5185m	100	59	64	60
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	450	979	926	907
Calcium	ppm	ASTM D5185m	3000	1074	1071	1010
Phosphorus	ppm	ASTM D5185m	1150	1073	995	1017
Zinc	ppm	ASTM D5185m	1350	1328	1160	1175
Sulfur	ppm	ASTM D5185m	4250	3300	2712	3261
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.8	22.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.4	6.8	9.2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.1	▲ 11.3	12.3

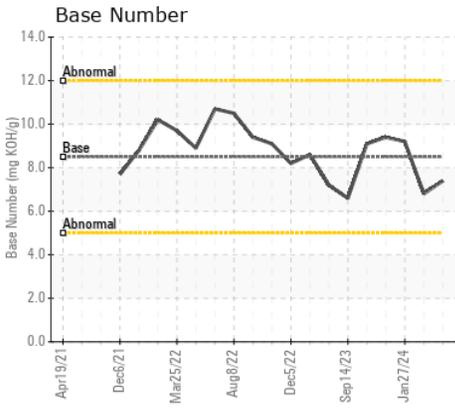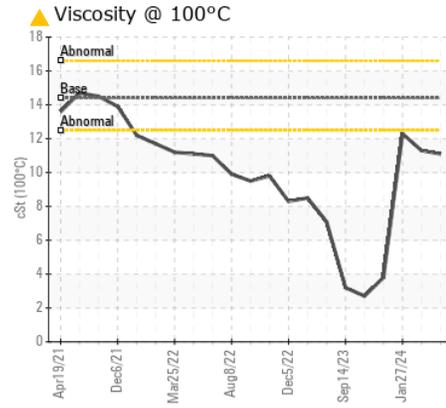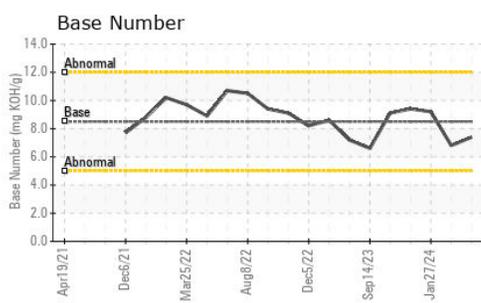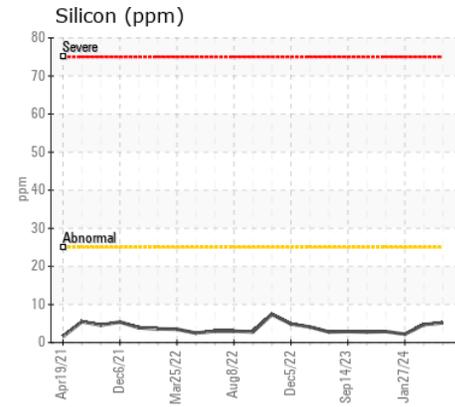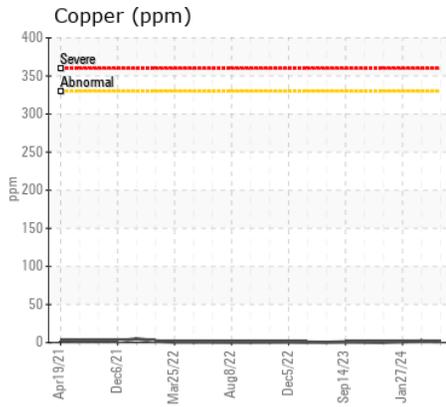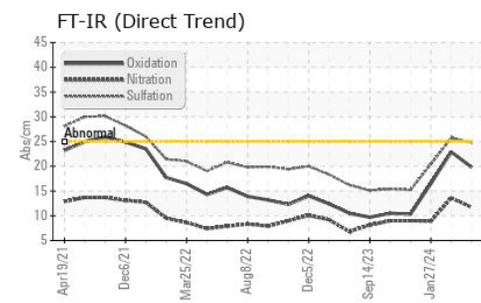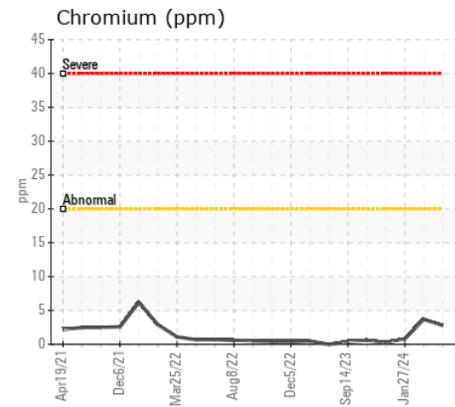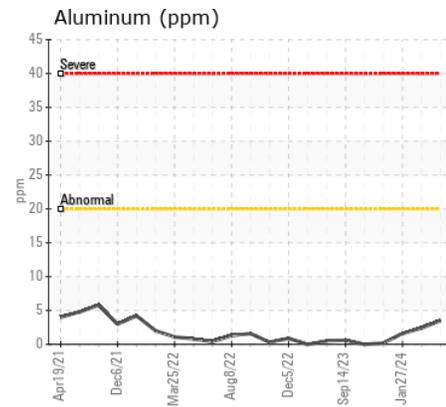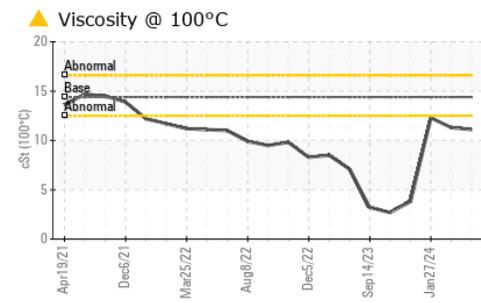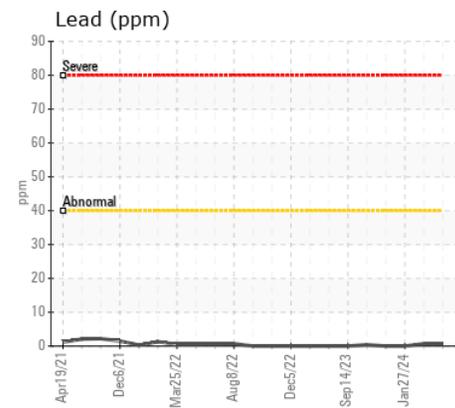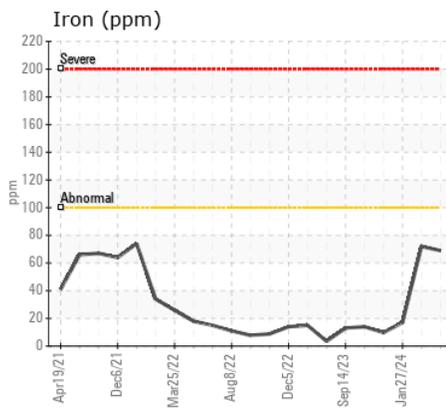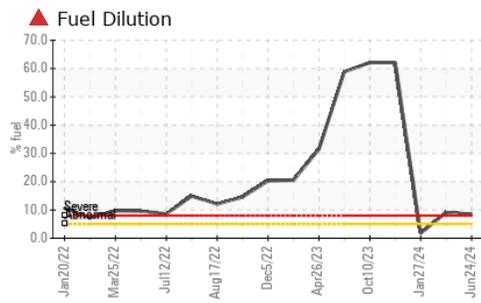

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0007864 **Received** : 27 Jun 2024
Lab Number : 06222002 **Tested** : 01 Jul 2024
Unique Number : 11100199 **Diagnosed** : 01 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

LRS - NILES
 33541 REUM RD
 NILES, MI
 US 49120
 Contact: JOHN HUGHES
 johnh@michianarecyclinganddisposal.com
 T: (269)684-0900 X:124
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)