



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area  
**[CAPITOL CONST]**  
 Machine Id  
**VOLVO EC350 314743**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011277	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		572	---	---
Oil Age	hrs	Client Info		572	---	---
Filter Age	hrs	Client Info		572	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	171	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	28	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel	%	ASTM D3524	>5	0.8	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		34	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		95	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		39	---	---
Calcium	ppm	ASTM D5185m		2347	---	---
Phosphorus	ppm	ASTM D5185m		1086	---	---
Zinc	ppm	ASTM D5185m		1323	---	---
Sulfur	ppm	ASTM D5185m		4540	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.3	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 10.4	---	---

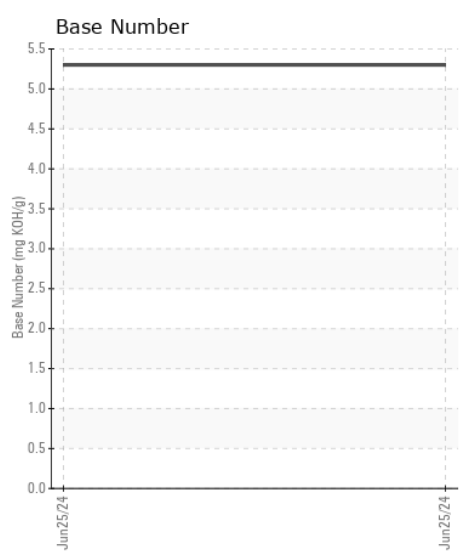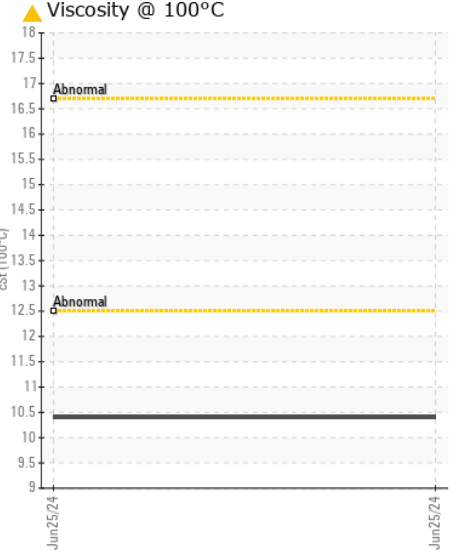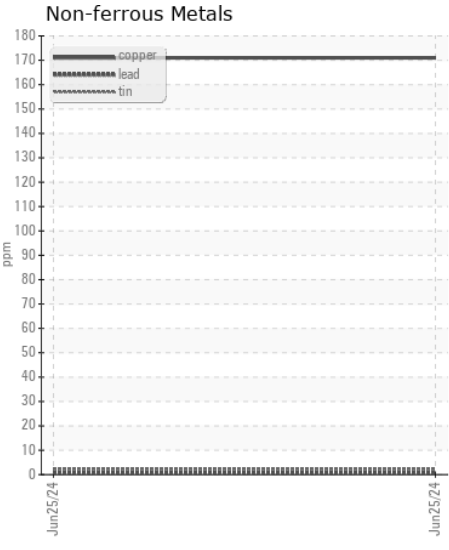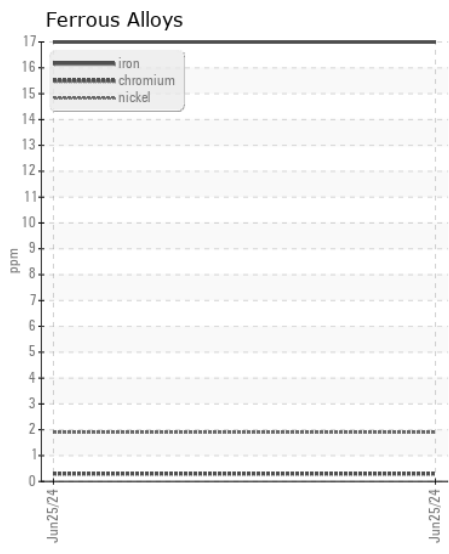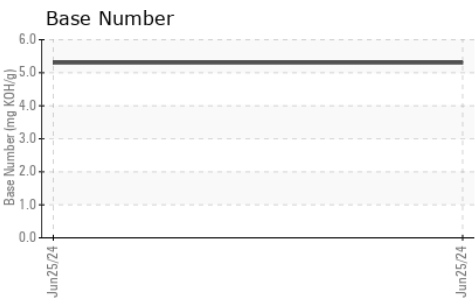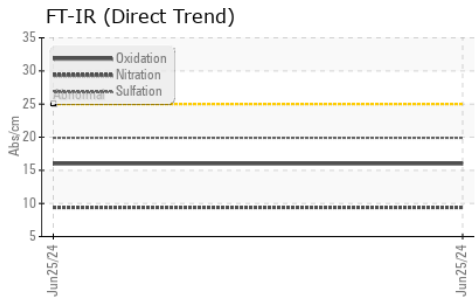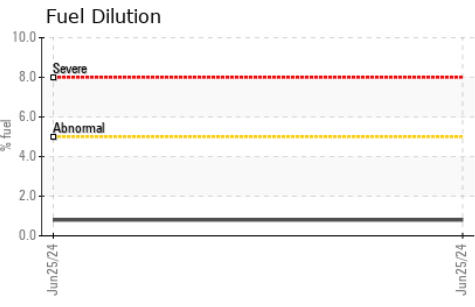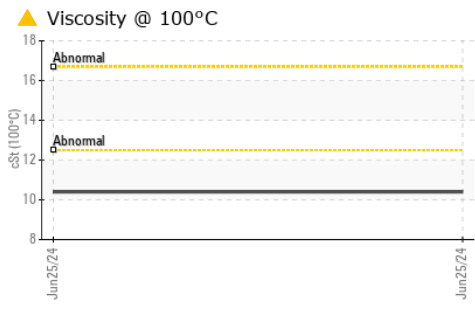

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011277 **Received** : 27 Jun 2024  
**Lab Number** : 06222017 **Tested** : 01 Jul 2024  
**Unique Number** : 11100214 **Diagnosed** : 01 Jul 2024 - Angela Borella  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**113 - ASCENDUM MACHINERY INC - GARNER**  
 3561 JONES SAUSAGE ROAD  
 GARNER, NC  
 US 27529  
 Contact: TRENT BROADWELL  
 trent.broadwell@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)