



OIL ANALYSIS REPORT

WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
Store 6 - Ashland [152441]
Machine Id
JOHN DEERE 325G 1T0325GKHNJ427697
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (3 GAL)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0044658	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		533	---	---
Oil Age	hrs	Client Info		533	---	---
Filter Age	hrs	Client Info		533	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	32	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>31	10	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	72	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>120	39	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	15	---	---
Boron	ppm	ASTM D5185m		157	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		209	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		652	---	---
Calcium	ppm	ASTM D5185m		1742	---	---
Phosphorus	ppm	ASTM D5185m		940	---	---
Zinc	ppm	ASTM D5185m		1158	---	---
Sulfur	ppm	ASTM D5185m		3579	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.2	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	---	---

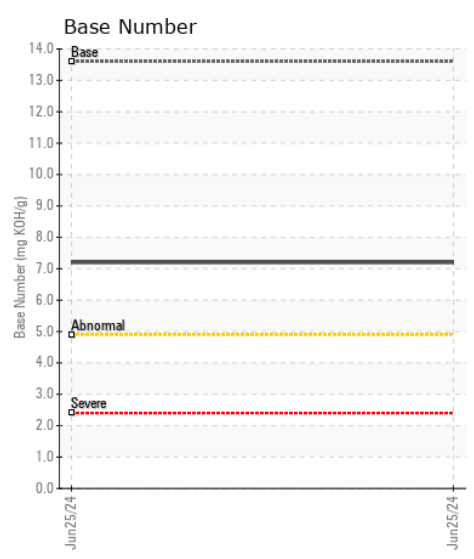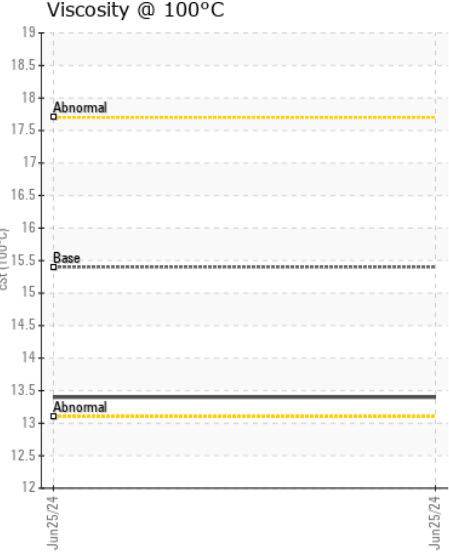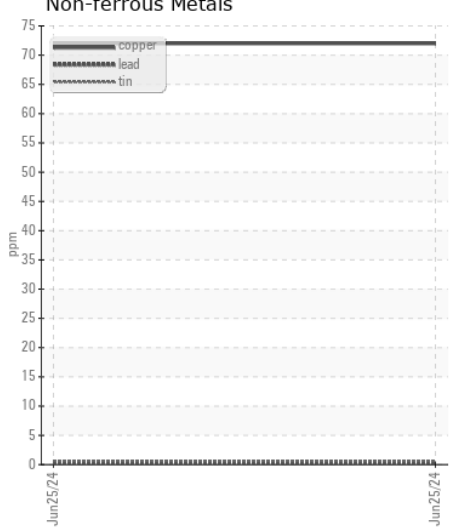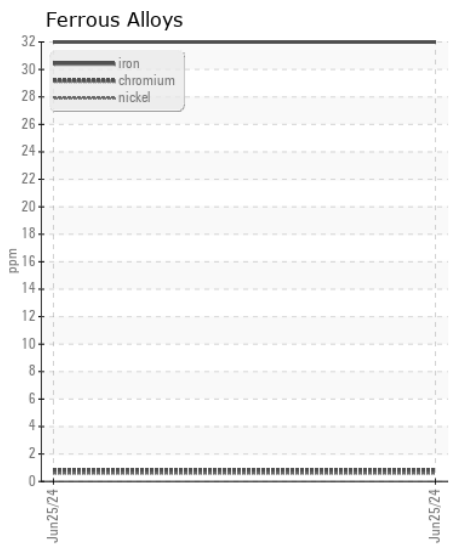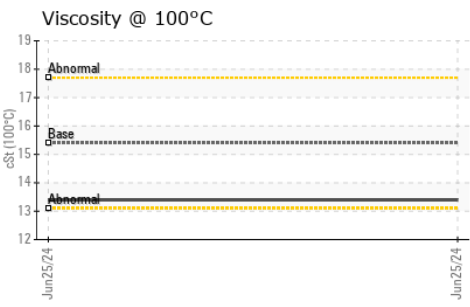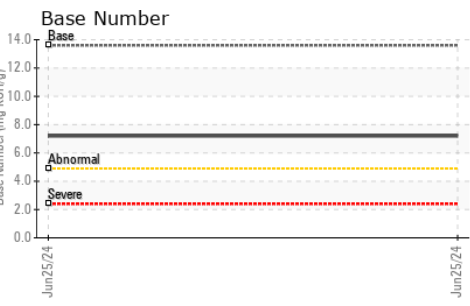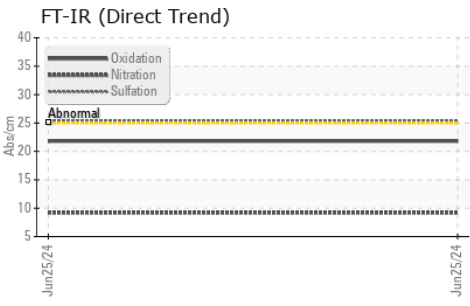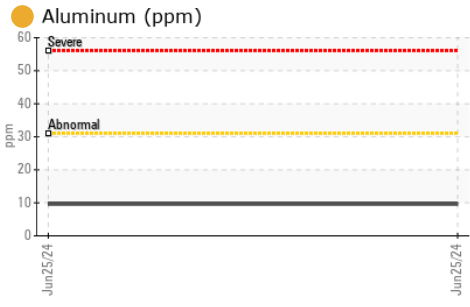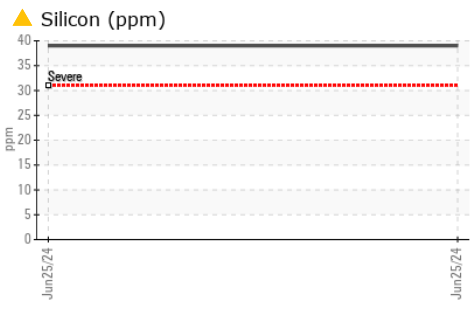

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0044658 **Received** : 27 Jun 2024
Lab Number : 06222031 **Tested** : 27 Jun 2024
Unique Number : 11100228 **Diagnosed** : 28 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570