



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Area

[2626 IAA FREMONT]

Machine Id

VOLVO L90H 625921

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP403546	VCP446704	VCP345488
Sample Date		Client Info		25 Jun 2024	18 Mar 2024	25 Jul 2023
Machine Age	hrs	Client Info		4958	4452	3293
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	43	53	48
Chromium	ppm	ASTM D5185m	>20	<1	1	1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	4	5	4
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>20	0	<1	<1
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	6	7	5
Potassium	ppm	ASTM D5185m	>20	<1	1	1
Fuel	%	ASTM D3524	>6.0	3.8	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.4	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	22.3	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	<1	2
Boron	ppm	ASTM D5185m	2.5	31	36	33
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	41	44	40
Manganese	ppm	ASTM D5185m	0.0	1	<1	<1
Magnesium	ppm	ASTM D5185m	256	536	519	481
Calcium	ppm	ASTM D5185m	2057	1789	1744	1656
Phosphorus	ppm	ASTM D5185m	935	799	935	874
Zinc	ppm	ASTM D5185m	1223	1159	1185	1091
Sulfur	ppm	ASTM D5185m	4079	3268	2770	2764
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.9	20.4	20.8
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.6	10.0	10.6
Visc @ 100°C	cSt	ASTM D445	15.0	▲ 11.8	12.6	13.3


▲ Viscosity @ 100°C

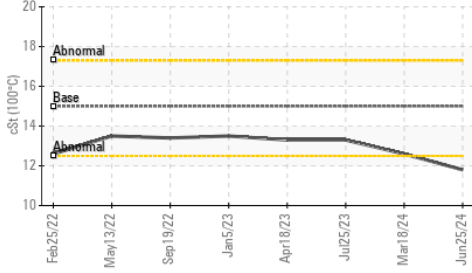


Iron (ppm)

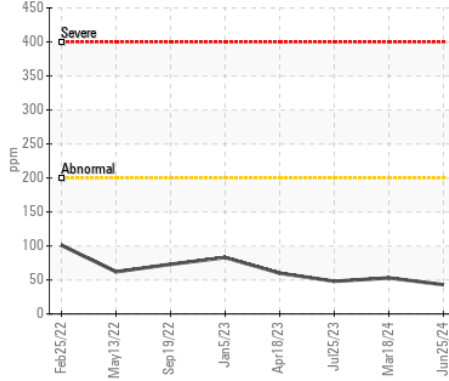


Lead (ppm)

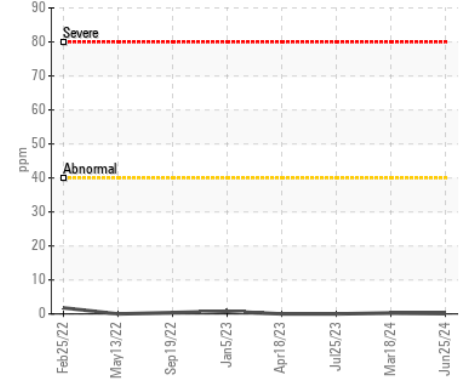


Fuel Dilution

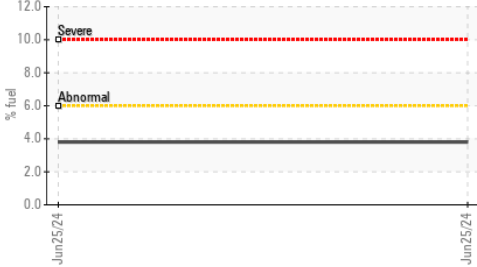


Aluminum (ppm)

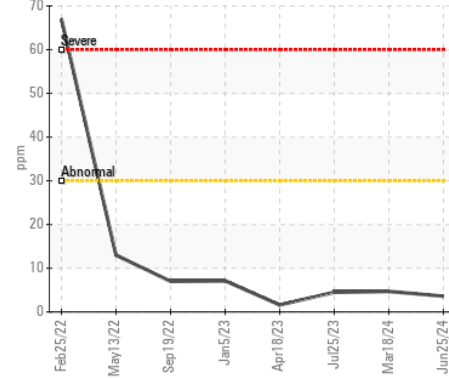


Chromium (ppm)

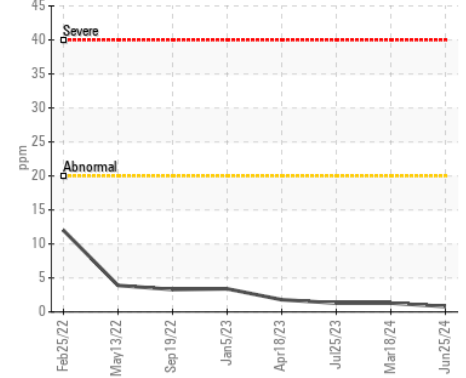


FT-IR (Direct Trend)

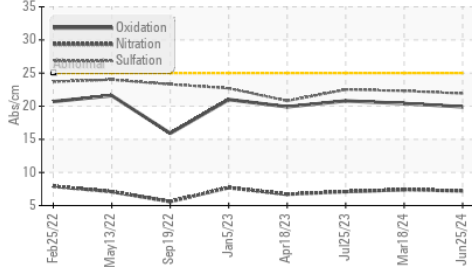


Copper (ppm)

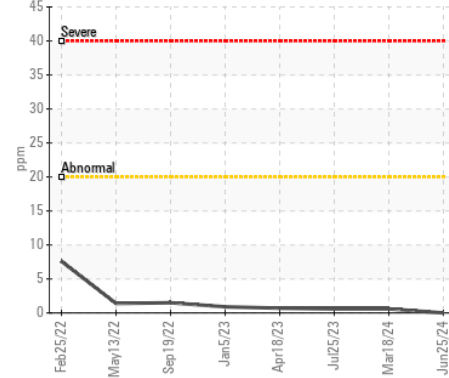


Silicon (ppm)

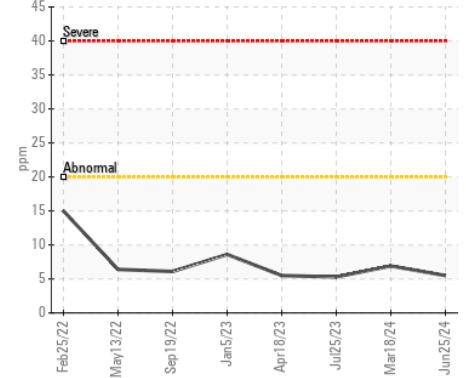


Base Number

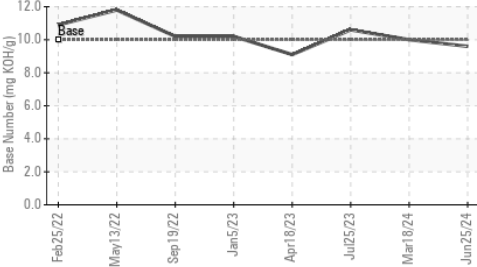

▲ Viscosity @ 100°C

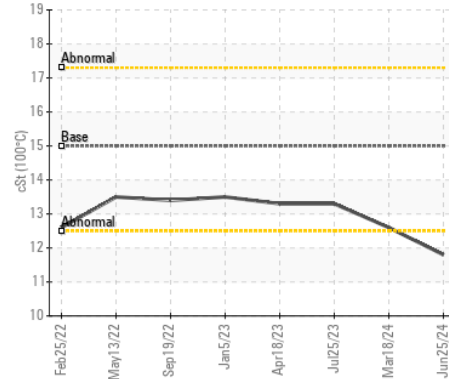

Base Number

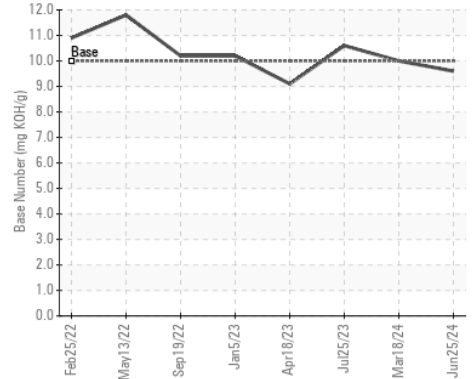

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP403546 **Received** : 27 Jun 2024
Lab Number : 06222114 **Tested** : 01 Jul 2024
Unique Number : 11100311 **Diagnosed** : 01 Jul 2024 - Angela Borella
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

VCES- VOLVO CONSTRUCTION EQUIPMENT
 1944 MARINA BLVD
 SAN LEANDRO, CA
 US 94577
 Contact: JOHN BUDESILICH
 john.budesilich@vcesvolvo.com
 T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (925)294-9240