



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[05W47824]**  
 Machine Id  
**JOHN DEERE 310E 1DW310EXHNF715994**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (33 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225389</b>	JR0211040	JR0196187
Sample Date		Client Info		<b>26 Jun 2024</b>	16 Apr 2024	15 Dec 2023
Machine Age	hrs	Client Info		<b>2936</b>	2479	1952
Oil Age	hrs	Client Info		<b>457</b>	527	510
Filter Age	hrs	Client Info		<b>457</b>	0	510
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>14</b>	19	22
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>4</b>	9	14
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>6</b>	5	4
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>26	<b>1</b>	5	13
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>7</b>	6	8
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	0.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	7.7	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	21.2	21.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>4</b>	<1	0
Boron	ppm	ASTM D5185m		<b>227</b>	199	191
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>251</b>	221	194
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>852</b>	751	623
Calcium	ppm	ASTM D5185m		<b>1514</b>	1659	2061
Phosphorus	ppm	ASTM D5185m		<b>1003</b>	1013	919
Zinc	ppm	ASTM D5185m		<b>1184</b>	1129	1144
Sulfur	ppm	ASTM D5185m		<b>3708</b>	3191	3584
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	15.8	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.7</b>	9.1	9.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.9</b>	12.8	12.0


**FT-IR (Direct Trend)**

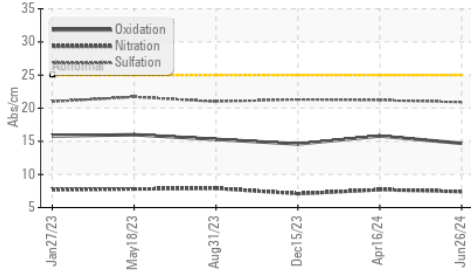


**Base Number**

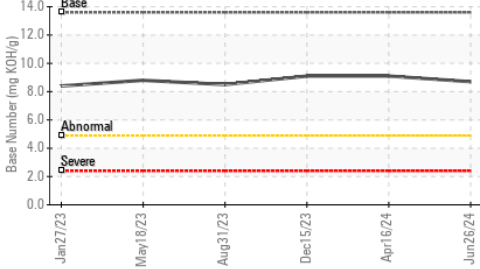


**Viscosity @ 100°C**

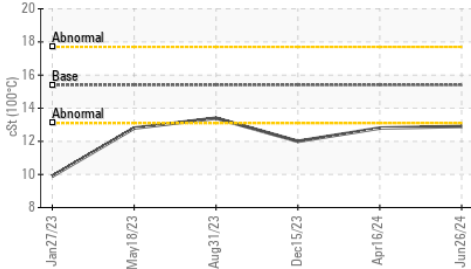


**Ferrous Alloys**

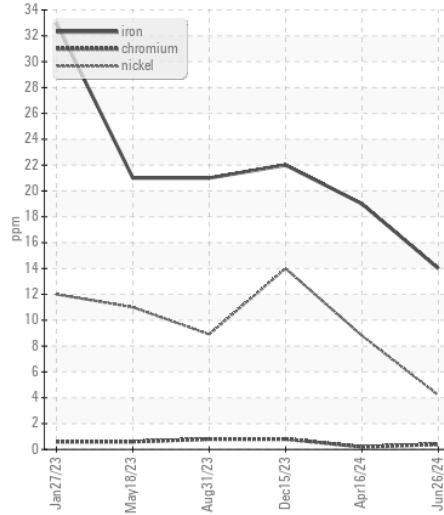


**Non-ferrous Metals**

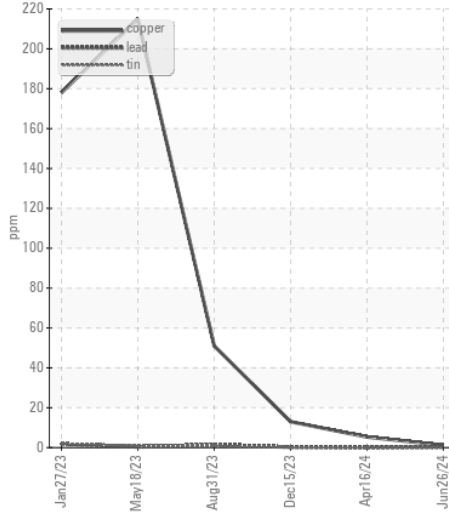

**Viscosity @ 100°C**

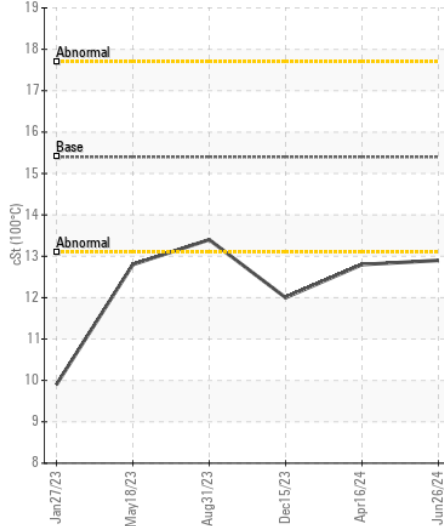

**Base Number**

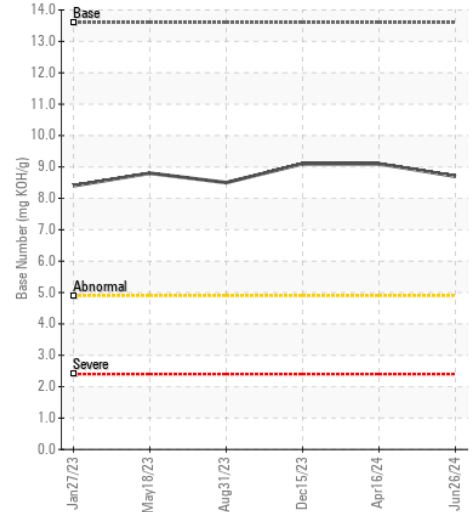

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225389 **Received** : 27 Jun 2024  
**Lab Number** : 06222189 **Tested** : 28 Jun 2024  
**Unique Number** : 11100386 **Diagnosed** : 28 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**B & S SITE DEVELOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)