



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L70H L70H Wheeled Loader 9415667
 Component
Main Engine
 Fluid
CHEVRON DELO 400 SDE SAE 15W40 (30 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0003939	---	---
Sample Date		Client Info		18 Jun 2024	---	---
Machine Age	hrs	Client Info		7259	---	---
Oil Age	hrs	Client Info		292	---	---
Filter Age	hrs	Client Info		292	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	3	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>300	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		10	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		46	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		870	---	---
Calcium	ppm	ASTM D5185m		1049	---	---
Phosphorus	ppm	ASTM D5185m	760	1003	---	---
Zinc	ppm	ASTM D5185m	800	1166	---	---
Sulfur	ppm	ASTM D5185m	3000	3285	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.7	---	---
Visc @ 100°C	cSt	ASTM D445	14.6	14.4	---	---

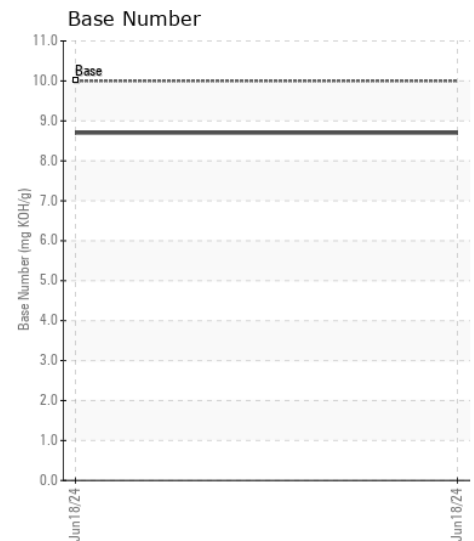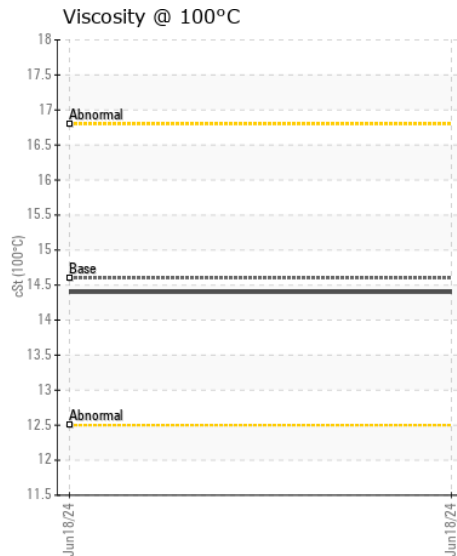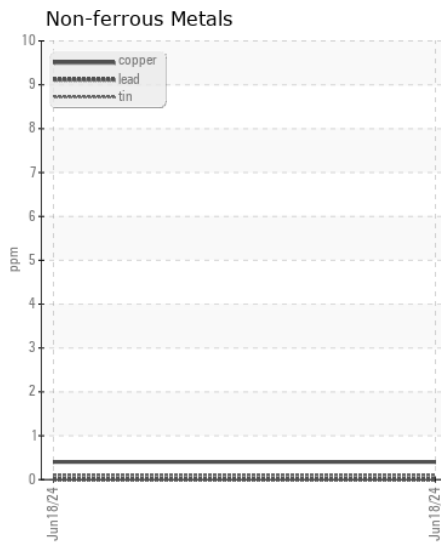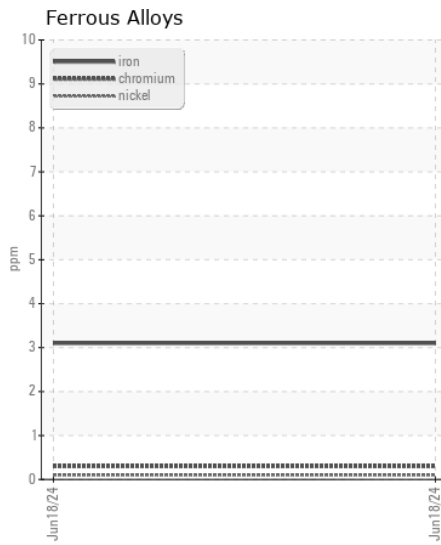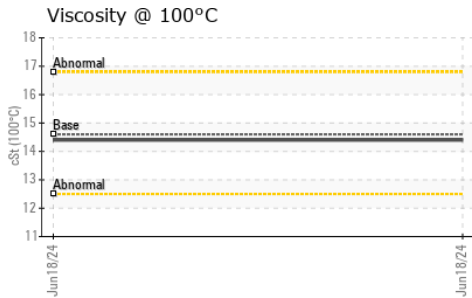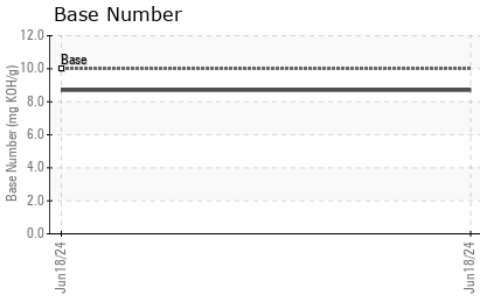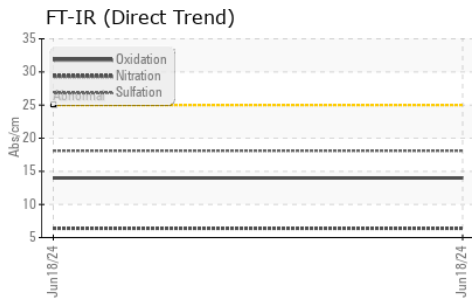

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003939 **Received** : 27 Jun 2024
Lab Number : 06222207 **Tested** : 28 Jun 2024
Unique Number : 11100404 **Diagnosed** : 28 Jun 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CEDAR GROVE
 7343 E MARINGAL WAY S
 SEATTLE, WA
 US 98108
 Contact: CRAIG BOWEN
 craigb@cgcompost.com
 T: (877)764-5748
 F: