



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PACCAR 8464996
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 15W40 (46 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021098	RPL0019424	RPL0017419
Sample Date		Client Info		18 Jun 2024	18 Mar 2024	27 Dec 2023
Machine Age	mls	Client Info		95437	82736	71460
Oil Age	mls	Client Info		12701	11276	24608
Filter Age	mls	Client Info		12701	11276	24608
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	55	43	35
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	94	90	96
Lead	ppm	ASTM D5185m	>40	1	0	0
Copper	ppm	ASTM D5185m	>330	9	7	6
Tin	ppm	ASTM D5185m	>15	2	0	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Silicon	ppm	ASTM D5185m	>25	10	8	9
Potassium	ppm	ASTM D5185m	>20	213	198	206
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	11.2	10.6	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.4	23.5	21.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	2	2
Boron	ppm	ASTM D5185m	0	2	2	4
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	61	59	56
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m	0	1079	1055	972
Calcium	ppm	ASTM D5185m		1227	1226	1108
Phosphorus	ppm	ASTM D5185m		1200	1054	1102
Zinc	ppm	ASTM D5185m		1443	1316	1265
Sulfur	ppm	ASTM D5185m		3590	3584	3005
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	19.2	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	5.9	6.1	6.7
Visc @ 100°C	cSt	ASTM D445	14	13.6	13.5	13.3


FT-IR (Direct Trend)

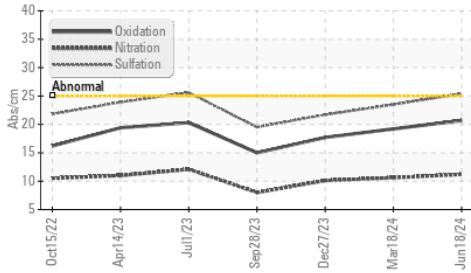


Ferrous Alloys

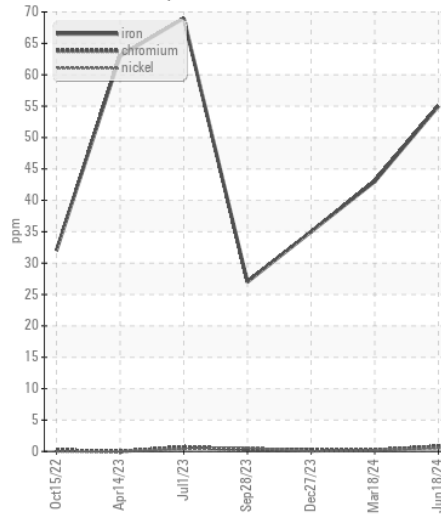


Base Number

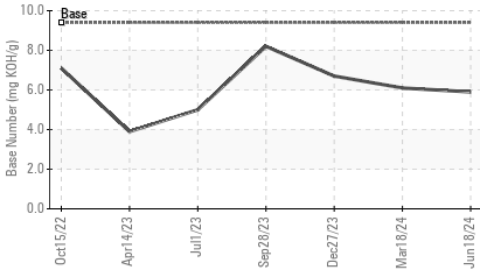


Non-ferrous Metals

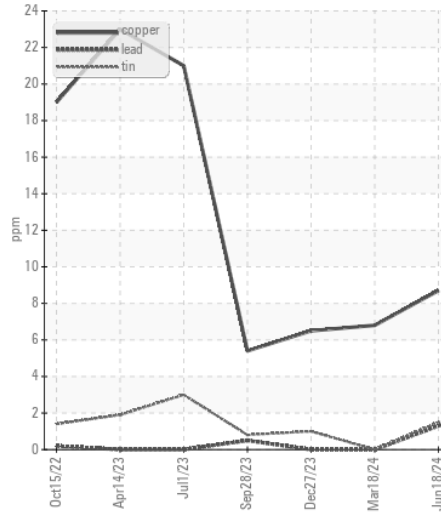


Viscosity @ 100°C

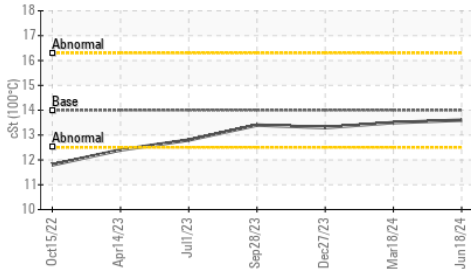


Aluminum (ppm)

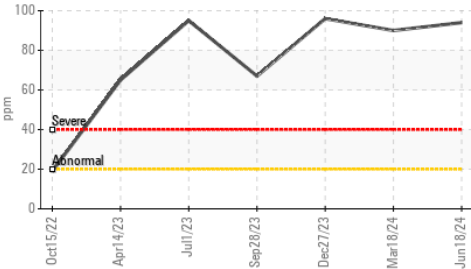

Viscosity @ 100°C

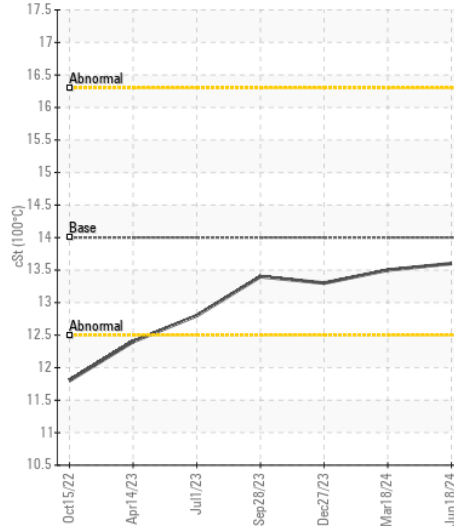

Base Number

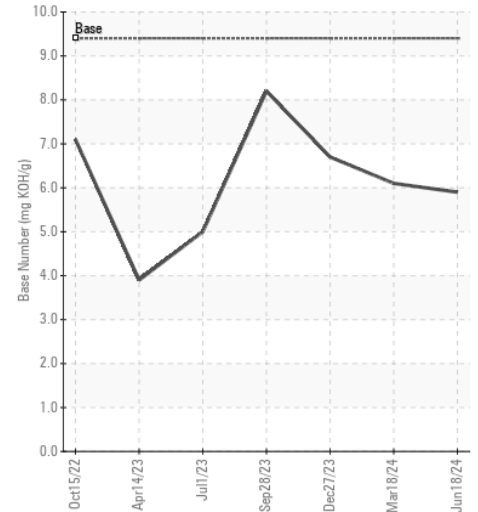

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0021098

Lab Number : 06222224

Unique Number : 11100421

Test Package : FLEET

Received : 27 Jun 2024

Tested : 28 Jun 2024

Diagnosed : 28 Jun 2024 - Don Baldrige

RTL PACLEASE - 7006 - Pico Rivera

7837 Telegraph Rd

Pico Rivera, CA

US 90660

Contact: GERARDO CARROLA

carrolag@rushenterprises.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)