



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD E47165
 Component
Gasoline Engine
 Fluid
MOTORCRAFT FULL SYNTHETIC SAE 5W30 (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021044	RPL0017930	RPL0015792
Sample Date		Client Info		13 Jun 2024	28 Feb 2024	17 Oct 2023
Machine Age	mls	Client Info		94778	91102	86929
Oil Age	mls	Client Info		76289	5230	1057
Filter Age	mls	Client Info		0	5230	1057
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	5	29	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	4	5	2
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>155	2	10	2
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	9	20	11
Potassium	ppm	ASTM D5185m	>20	3	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	5.7	9.1	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.9	26.0	17.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	7	8	3
Boron	ppm	ASTM D5185m		129	33	113
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		70	96	71
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m		561	725	521
Calcium	ppm	ASTM D5185m		974	1293	913
Phosphorus	ppm	ASTM D5185m		749	916	662
Zinc	ppm	ASTM D5185m		817	1084	736
Sulfur	ppm	ASTM D5185m		3181	3941	2950
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.4	17.2	9.7
Base Number (BN)	mg KOH/g	ASTM D2896		5.5	2.2	5.5
Visc @ 100°C	cSt	ASTM D445		9.8	9.5	9.4


FT-IR (Direct Trend)

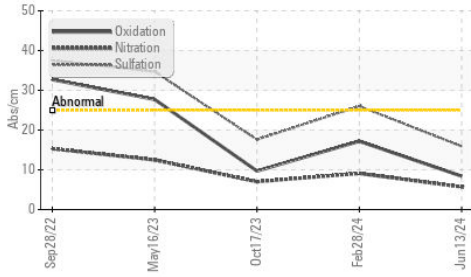


Ferrous Alloys

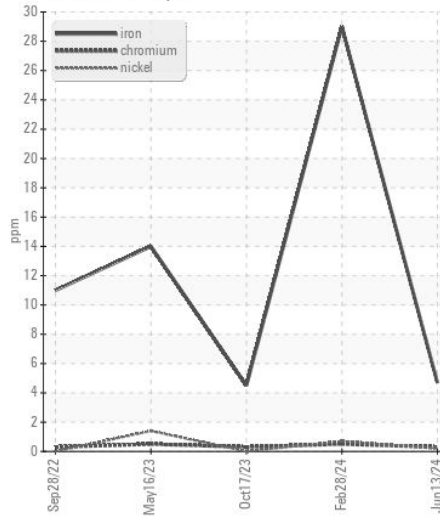


Base Number

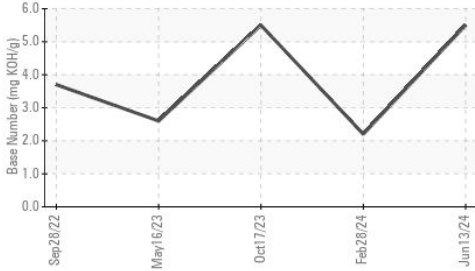


Non-ferrous Metals

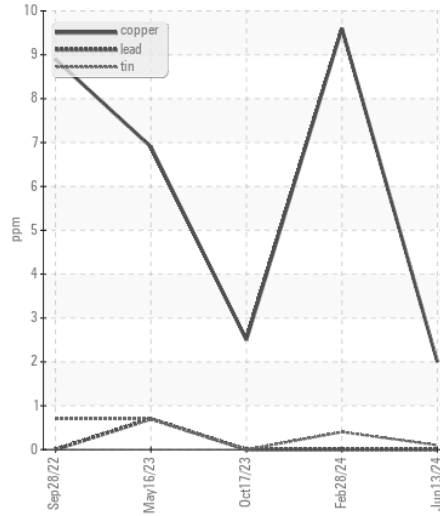


Viscosity @ 100°C

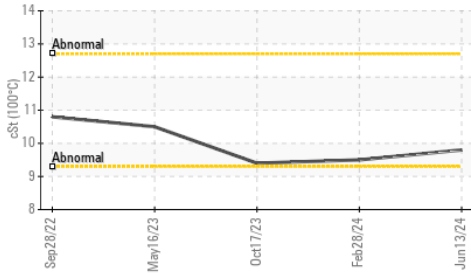

Viscosity @ 100°C

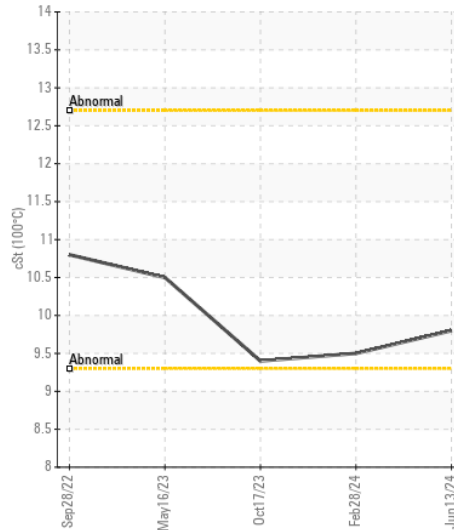

Base Number

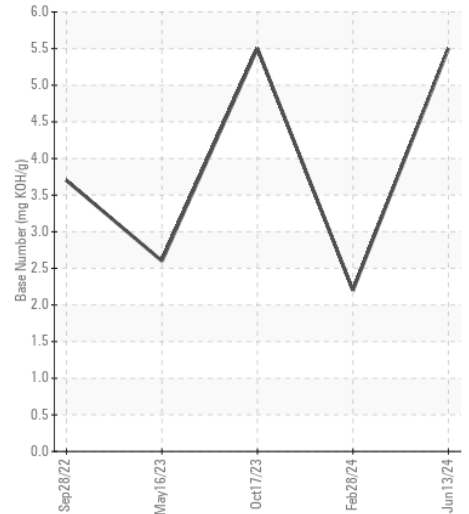

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0021044
Lab Number : 06222233
Unique Number : 11100430
Test Package : FLEET

Received : 27 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: