



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area

[05W47662]

Machine Id

JOHN DEERE 350G 1FF350GXCNF815479

Component

Hydraulic System

Fluid

HITACHI HYDRAULIC SUPER EX 46HN (220 QTS)

RECOMMENDATION

Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225544	JR0211045	JR0187213
Sample Date		Client Info		26 Jun 2024	01 Apr 2024	25 Oct 2023
Machine Age	hrs	Client Info		2512	1975	1714
Oil Age	hrs	Client Info		2512	1975	500
Filter Age	hrs	Client Info		537	1975	500
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184	>50	16	12	9
Iron	ppm	ASTM D5185m	>32	2	4	3
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	<1	1	2
Lead	ppm	ASTM D5185m	>28	0	0	0
Copper	ppm	ASTM D5185m	>50	3	4	6
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	▲ LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>11	3	3	6
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	15772	6009	10408
Particles >6µm		ASTM D7647	>20000	823	1078	2831
Particles >14µm		ASTM D7647	>640	9	92	257
Particles >21µm		ASTM D7647	>160	3	26	69
Particles >38µm		ASTM D7647	>40	0	1	3
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	21/17/10	20/17/14	21/19/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

Zinc level above manufacturer's recommendations. The AN level is acceptable for this fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>21	1	2	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		0	<1	10
Calcium	ppm	ASTM D5185m		325	355	674
Phosphorus	ppm	ASTM D5185m	827	590	623	658
Zinc	ppm	ASTM D5185m	0	▲ 165	▲ 177	▲ 349
Sulfur	ppm	ASTM D5185m	13	681	748	1179
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.41	0.41	0.58
Visc @ 40°C	cSt	ASTM D445	47	47.3	47.1	46.7

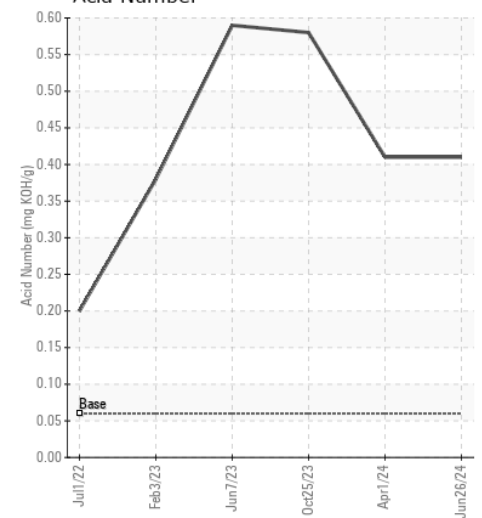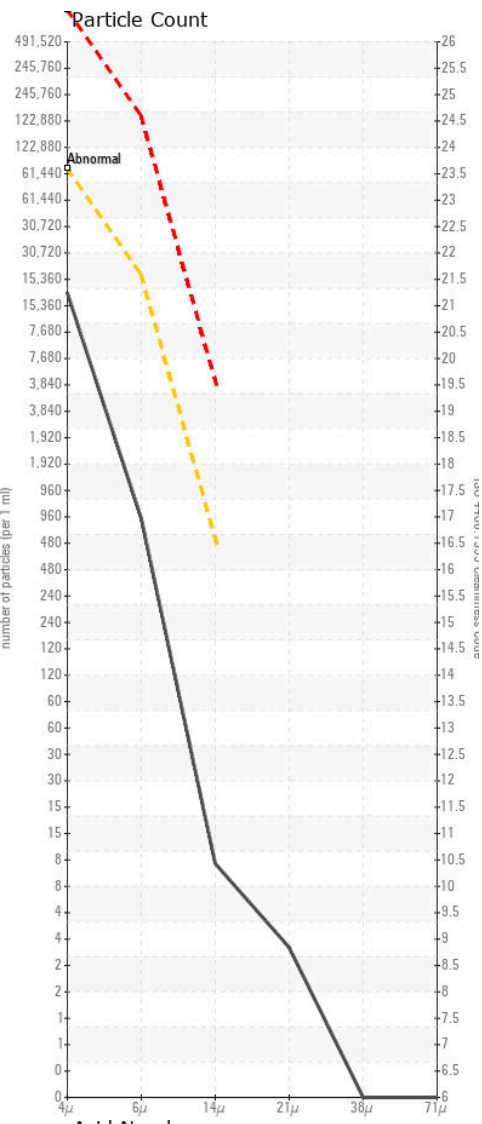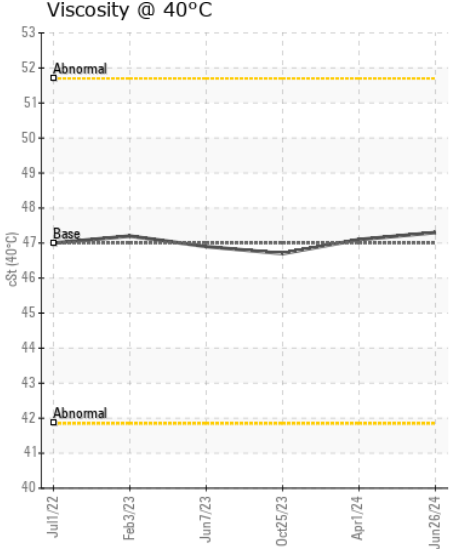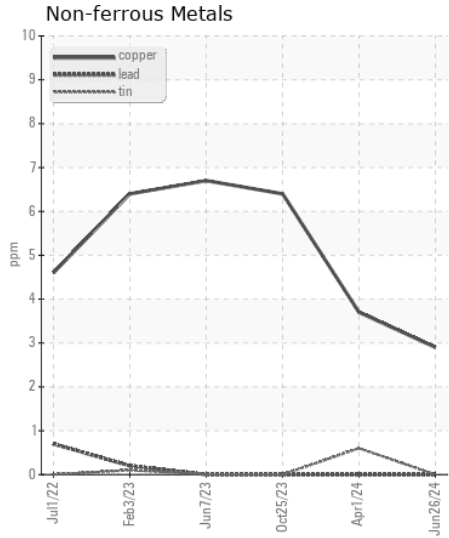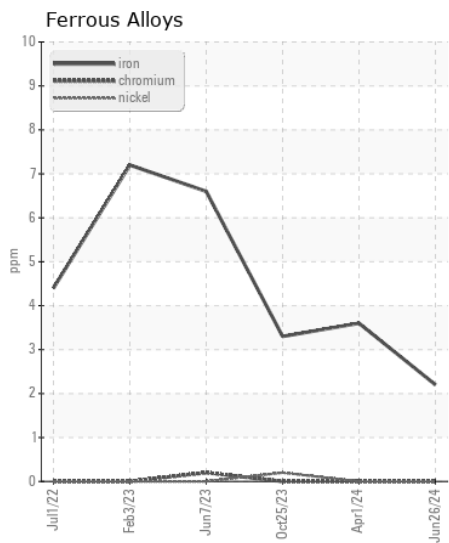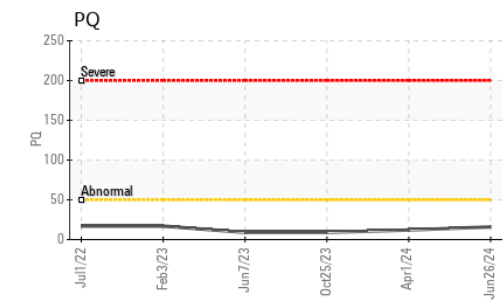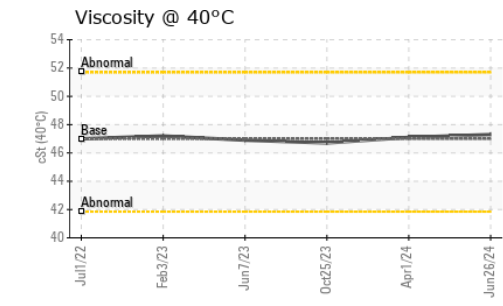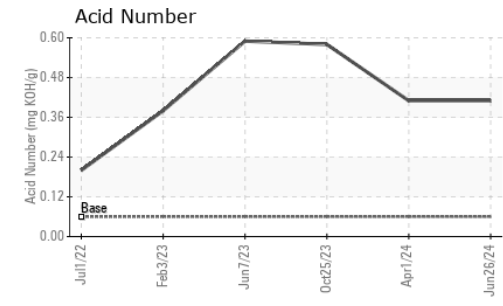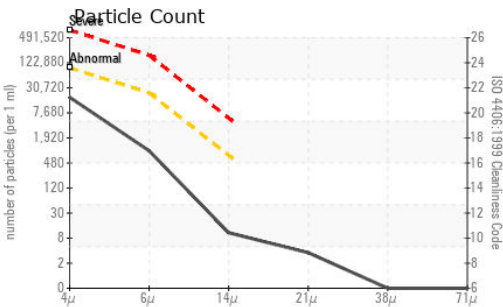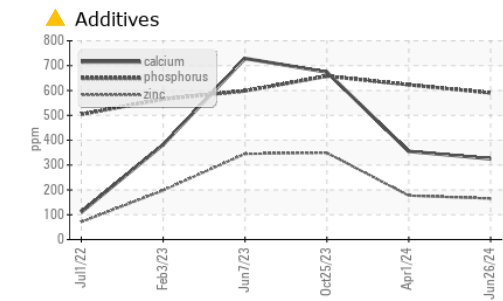

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225544 **Received** : 27 Jun 2024
Lab Number : 06222266 **Tested** : 28 Jun 2024
Unique Number : 11100463 **Diagnosed** : 28 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)