



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
SOLD LOCATIONS - LESCHI - CHILLICOTHE
Machine Id
JOHN DEERE 644J DW644JZ616347
Component
Transmission (Manual)
Fluid
JOHN DEERE HY-GARD HYD/TRANS (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050866	LEC0038960	LEC0033129
Sample Date		Client Info		24 Jun 2024	15 Feb 2023	24 May 2022
Machine Age	hrs	Client Info		18841	17371	16524
Oil Age	hrs	Client Info		1470	847	1500
Filter Age	hrs	Client Info		1470	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		20	11	20
Iron	ppm	ASTM D5185m		6	6	13
Chromium	ppm	ASTM D5185m		<1	<1	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m		3	0	<1
Lead	ppm	ASTM D5185m		<1	<1	0
Copper	ppm	ASTM D5185m		3	3	5
Tin	ppm	ASTM D5185m		<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m		4	3	3
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method		NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m		15	4	15
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		5	2	10
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		89	69	115
Calcium	ppm	ASTM D5185m		3268	3230	3315
Phosphorus	ppm	ASTM D5185m		1110	960	944
Zinc	ppm	ASTM D5185m		1273	1123	1212
Sulfur	ppm	ASTM D5185m		4106	3672	3384
Visc @ 40°C	cSt	ASTM D445		48.8	47.5	50.6

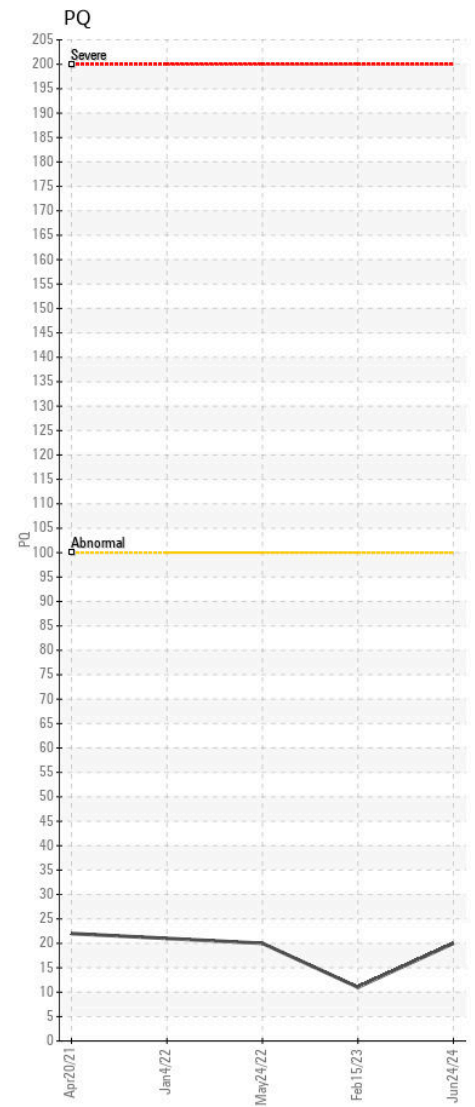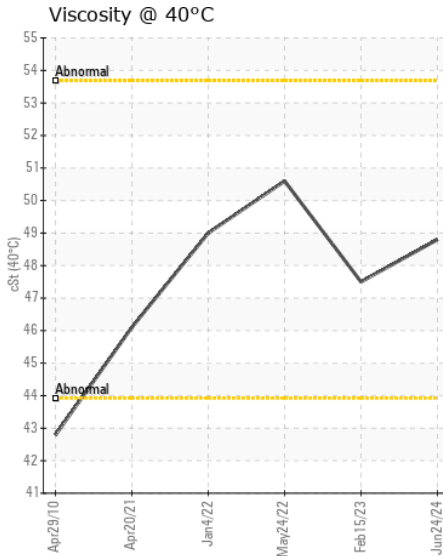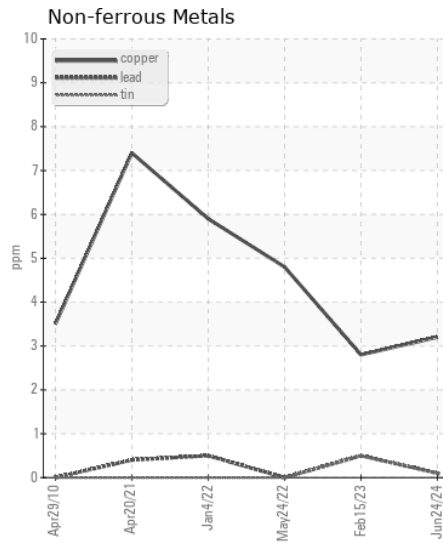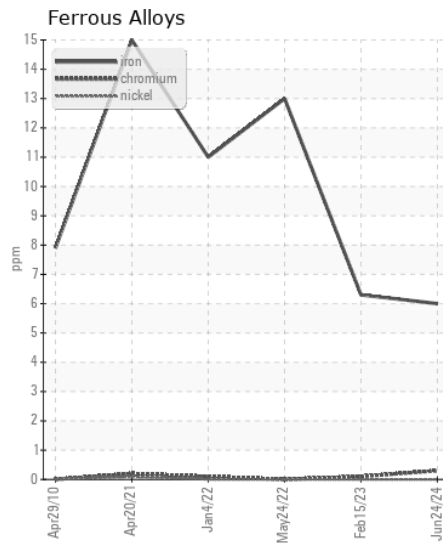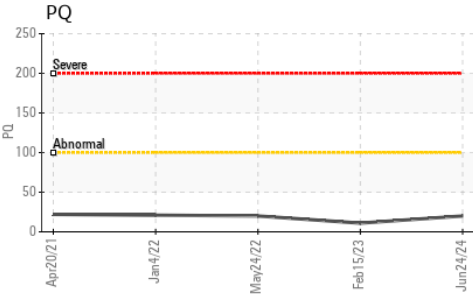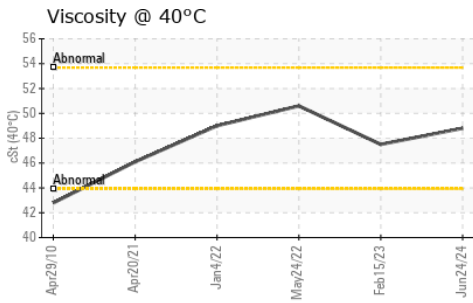

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050866 **Received** : 27 Jun 2024
Lab Number : 06222507 **Tested** : 01 Jul 2024
Unique Number : 11100704 **Diagnosed** : 01 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570