



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SURVEY-CANNON [SURVEY-CANNON]

Machine Id
ZF 20350596 - INBOARD

Component
Starboard Gearbox

Fluid
SAE 40W (2 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA058249	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		379	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal for OEM.

PQ		ASTM D8184		29	---	---
Iron	ppm	ASTM D5185m	>200	65	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	6	---	---
Lead	ppm	ASTM D5185m	>50	6	---	---
Copper	ppm	ASTM D5185m	>200	116	---	---
Tin	ppm	ASTM D5185m	>10	6	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	9	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		186	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		24	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		63	---	---
Calcium	ppm	ASTM D5185m		3023	---	---
Phosphorus	ppm	ASTM D5185m		960	---	---
Zinc	ppm	ASTM D5185m		1023	---	---
Sulfur	ppm	ASTM D5185m		4101	---	---
Visc @ 40°C	cSt	ASTM D445	150	86.6	---	---

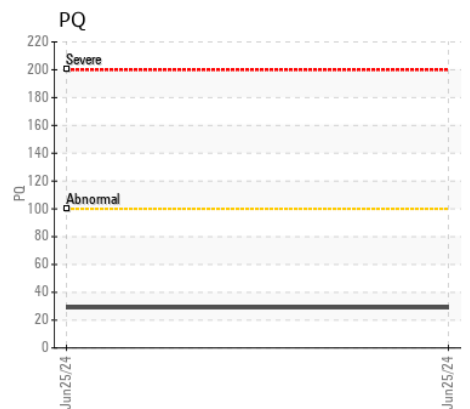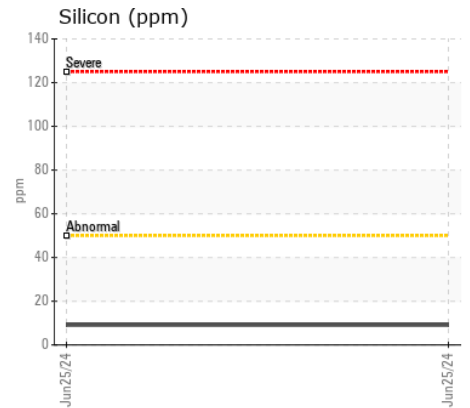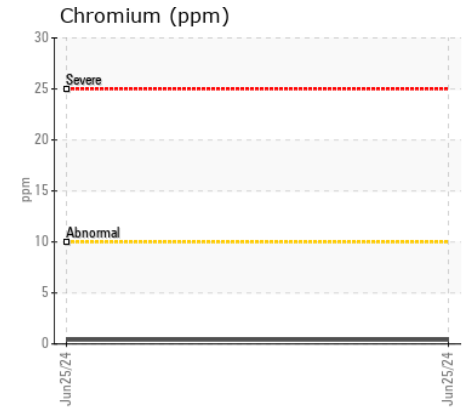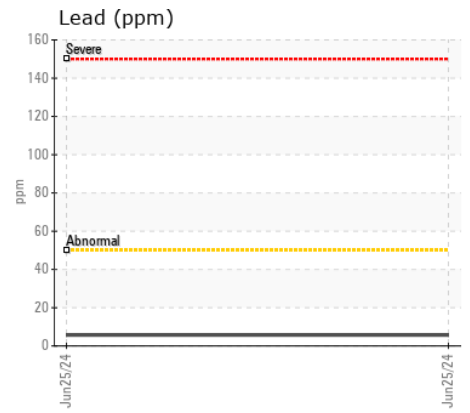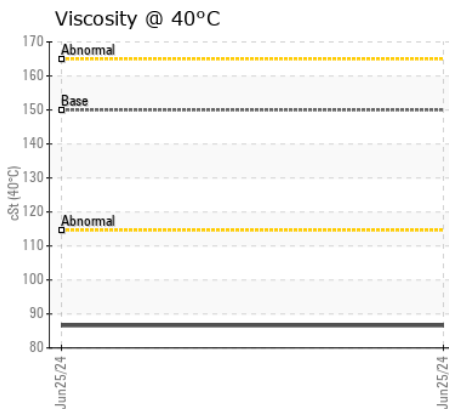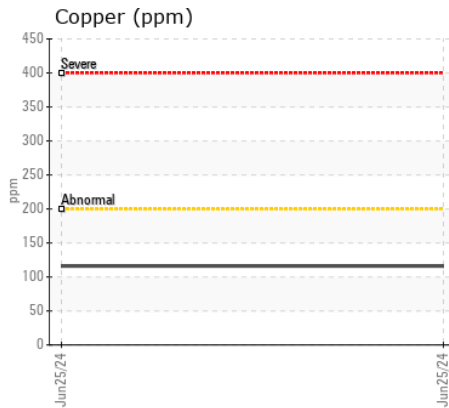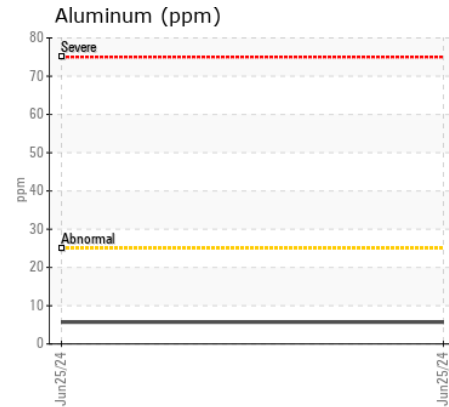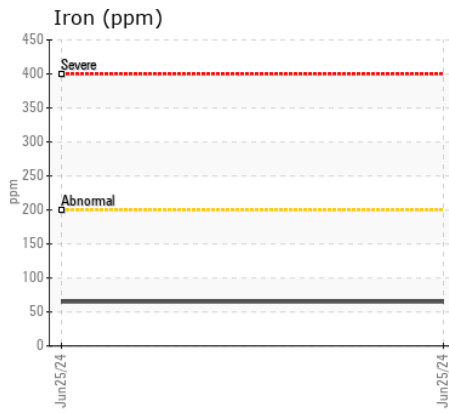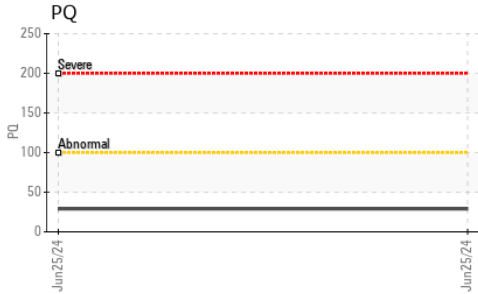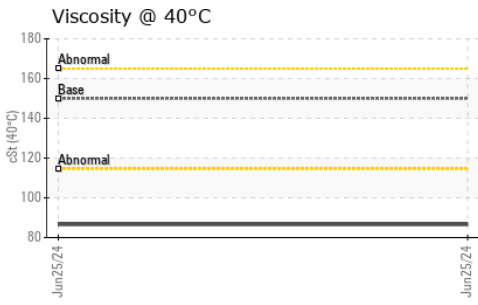

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA058249 **Received** : 27 Jun 2024
Lab Number : 06222578 **Tested** : 28 Jun 2024
Unique Number : 11100775 **Diagnosed** : 28 Jun 2024 - Doug Bogart
Test Package : MOB 1 (Additional Tests: PQ)

Suncoast Diesel Marine Inc.
 610 Mount Vernan St
 OLDSMAR, FL
 US 34677
 Contact: MARK WARREN
 oldsmar@suncoastdmi.com
 T: (813)475-5942
 F: (813)475-5943

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)