



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
WITACZACK [WITACZACK]
 Machine Id
VOLVO PENTA 3200002681
 Component
Port IPS
 Fluid
VOLVO PENTA GL-5 SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA056733	---	---
Sample Date		Client Info		24 Jun 2024	---	---
Machine Age	hrs	Client Info		253	---	---
Oil Age	hrs	Client Info		200	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		24	---	---
Iron	ppm	ASTM D5185m	>275	78	---	---
Chromium	ppm	ASTM D5185m	>4	<1	---	---
Nickel	ppm	ASTM D5185m	>4	2	---	---
Titanium	ppm	ASTM D5185m	>3	<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	5	---	---
Lead	ppm	ASTM D5185m	>4	<1	---	---
Copper	ppm	ASTM D5185m	>30	26	---	---
Tin	ppm	ASTM D5185m	>3	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	15	---	---
Potassium	ppm	ASTM D5185m	>20	12	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		530	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		909	---	---
Calcium	ppm	ASTM D5185m		34	---	---
Phosphorus	ppm	ASTM D5185m		1668	---	---
Zinc	ppm	ASTM D5185m		14	---	---
Sulfur	ppm	ASTM D5185m		24906	---	---
Visc @ 40°C	cSt	ASTM D445	90.0	90.6	---	---

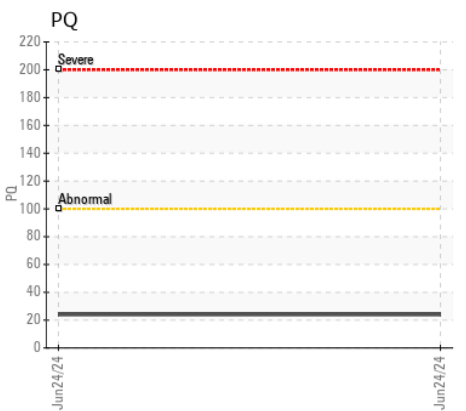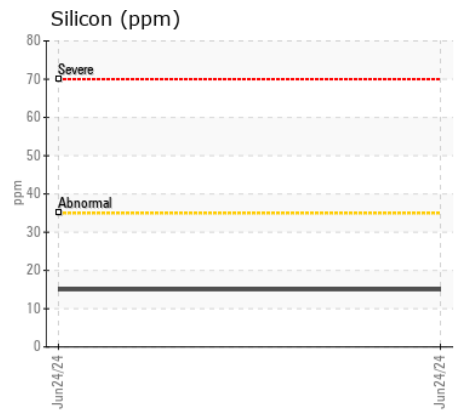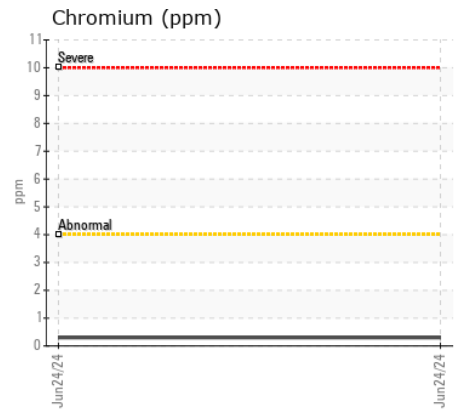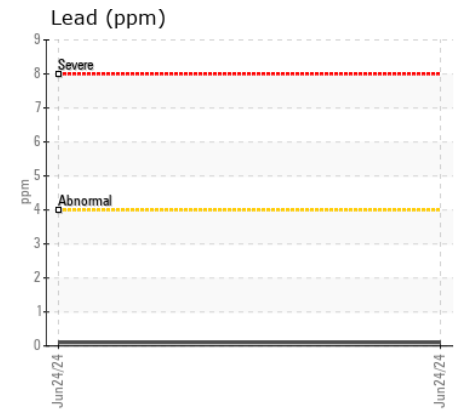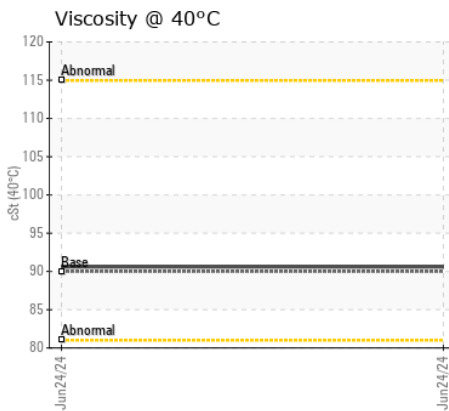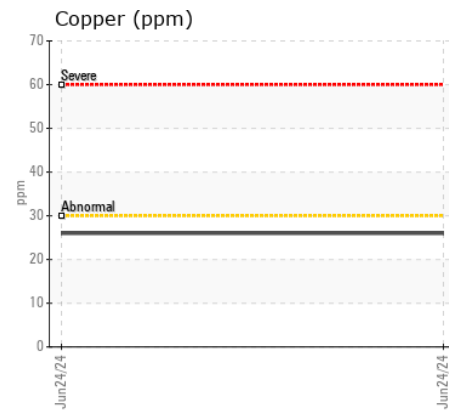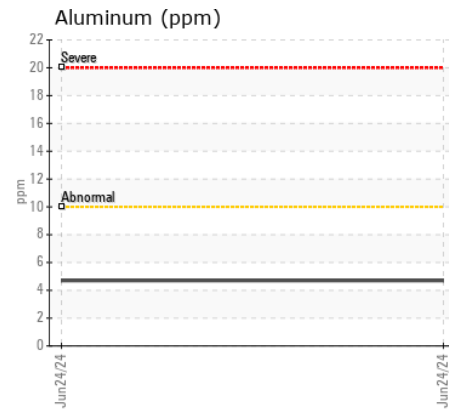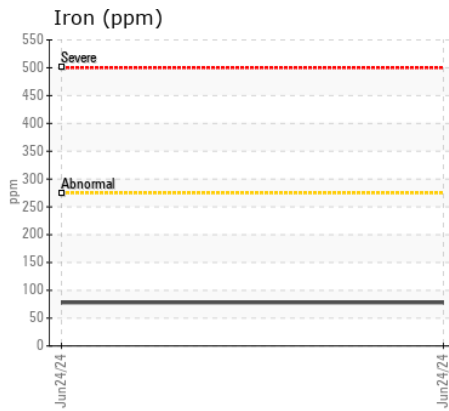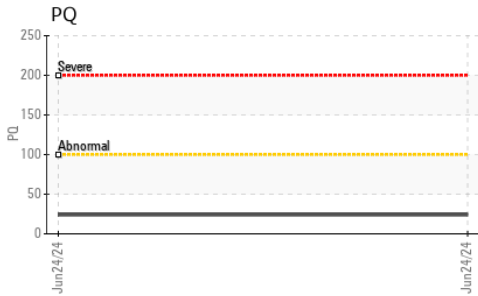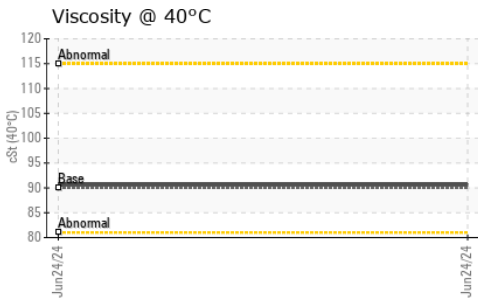

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA056733 **Received** : 27 Jun 2024
Lab Number : 06222586 **Tested** : 28 Jun 2024
Unique Number : 11100783 **Diagnosed** : 29 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

Gary Wood's Marine Inc
 3469 SW Palm City School Ave #A
 PALM CITY, FL
 US 34990
 Contact: Barbara Foreman
 barbara@garywoodsmarine.com
 T: (772)287-6093
 F: (772)287-7134

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)