



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 2364 (S/N 752175)
Component
Rear Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011129	ASC0010294	---
Sample Date		Client Info		26 Jun 2024	02 Apr 2024	---
Machine Age	hrs	Client Info		1017	503	---
Oil Age	hrs	Client Info		1017	503	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	217	177	---
Chromium	ppm	ASTM D5185m	>20	3	3	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	3	1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	2	<1	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	5	4	---
Potassium	ppm	ASTM D5185m	>20	6	6	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	---
Boron	ppm	ASTM D5185m		270	287	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		8	8	---
Manganese	ppm	ASTM D5185m		9	10	---
Magnesium	ppm	ASTM D5185m		1	1	---
Calcium	ppm	ASTM D5185m		109	122	---
Phosphorus	ppm	ASTM D5185m		2461	2385	---
Zinc	ppm	ASTM D5185m		59	58	---
Sulfur	ppm	ASTM D5185m		29469	29970	---
Visc @ 40°C	cSt	ASTM D445		52.9	53.0	---

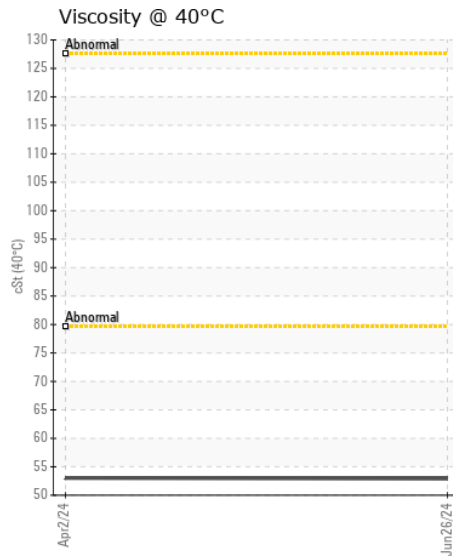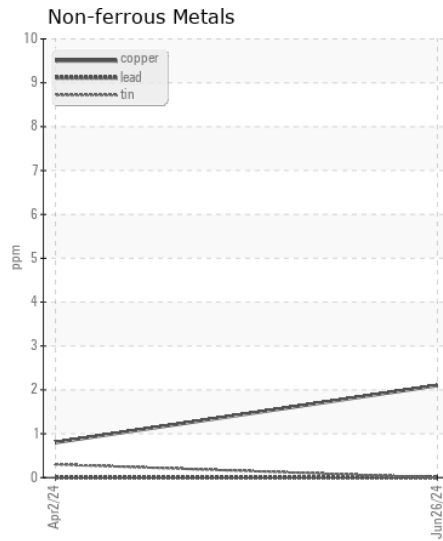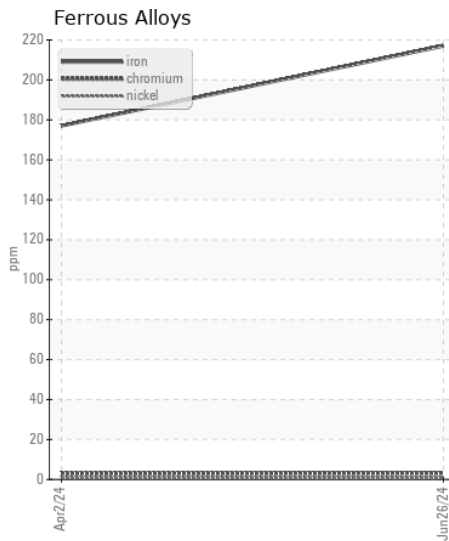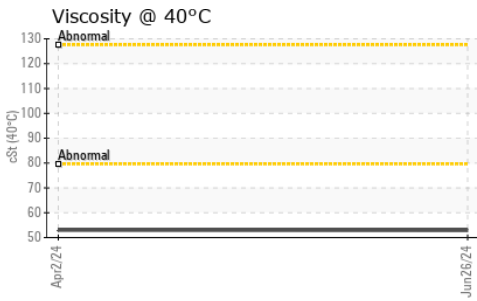

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011129
Lab Number : 06222637
Unique Number : 11100834
Test Package : CONST
Received : 27 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

G S MATERIALS INC
 PO BOX 1335
 BURLINGTON, NC
 US 27216

Contact: KAREN NEWPORT
 Gsmaterials@windstream.net
 T: (919)499-9322
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)