



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
CATERPILLAR 416 136
Component
Transmission (Manual)
Fluid
PETRO CANADA 30W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | WC0917334 | --- | --- |
| Sample Date | | Client Info | | 24 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 17721 | --- | --- |
| Oil Age | hrs | Client Info | | 250 | --- | --- |
| Filter Age | hrs | Client Info | | 250 | --- | --- |
| Oil Changed | | Client Info | | Not Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >200 | 44 | --- | --- |
| Chromium | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >7 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m | >45 | 2 | --- | --- |
| Copper | ppm | ASTM D5185m | >225 | 99 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is no indication of any contamination in the fluid.

| | | | | | | |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >125 | 8 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | LIGHT | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|--|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 4 | --- | --- |
| Boron | ppm | ASTM D5185m | | 12 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 15 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 2947 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1119 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1272 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 5536 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 80.7 | --- | --- |

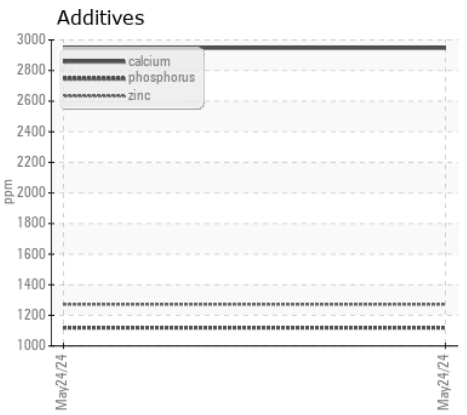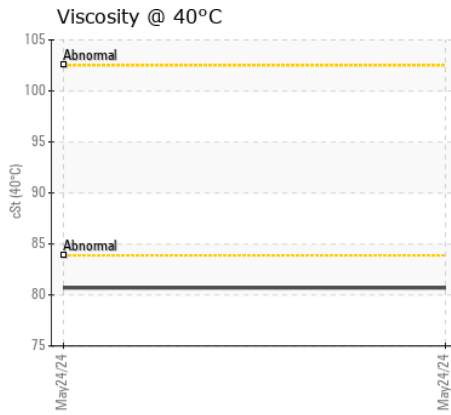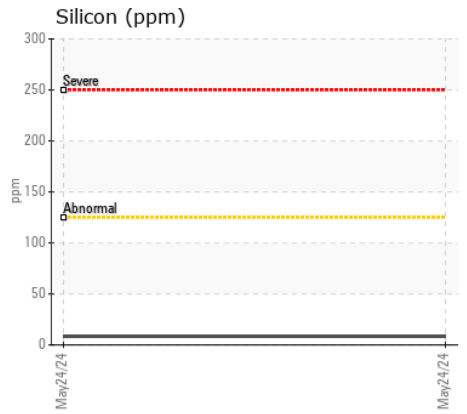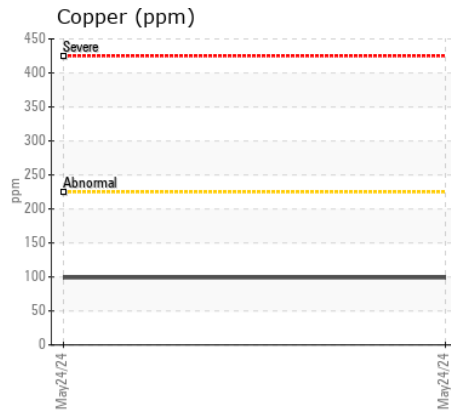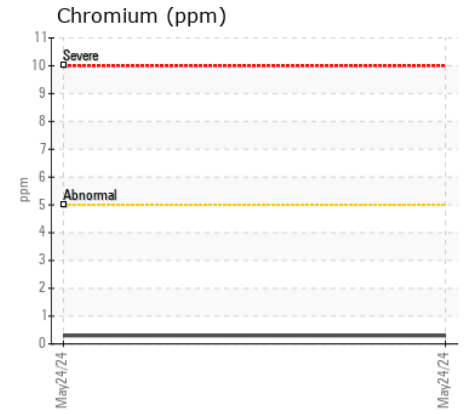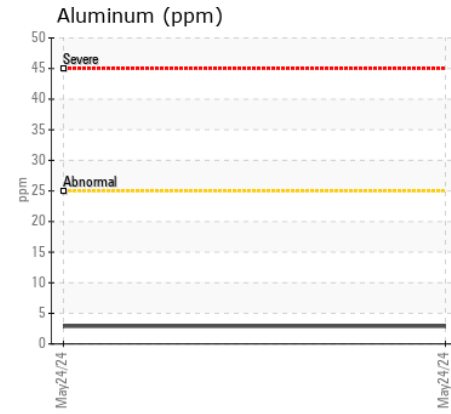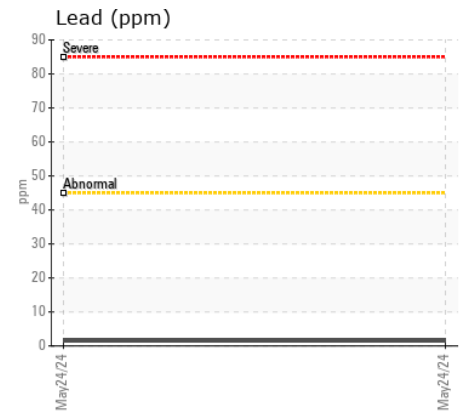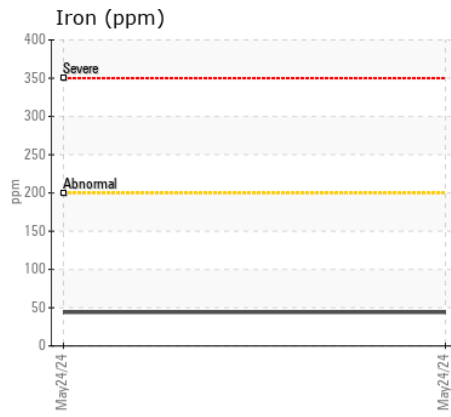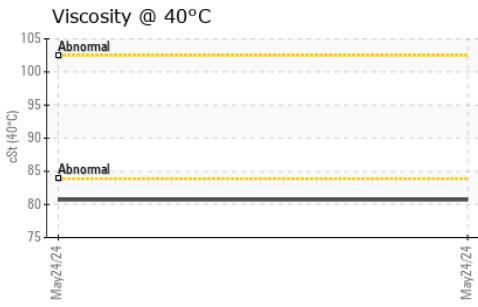

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917334 **Received** : 27 Jun 2024
Lab Number : 06222677 **Tested** : 28 Jun 2024
Unique Number : 11100874 **Diagnosed** : 29 Jun 2024 - Don Baldrige
Test Package : MOB 1

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: JAMIE HUCKS
 shop@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: