



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
E-ONE TRUCK 451
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947540	WC0703628	WC0591098
Sample Date		Client Info		03 Jun 2024	26 Jun 2022	01 Jul 2021
Machine Age	hrs	Client Info		0	49762	0
Oil Age	hrs	Client Info		0	49762	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	N/A	N/A
Filter Changed		Client Info		Not Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	1	2	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	0	0
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m	>75	5	4	4
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	3	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m	5	0	10	1
Barium	ppm	ASTM D5185m	5	1	0	0
Molybdenum	ppm	ASTM D5185m	5	<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	25	5	5	2
Calcium	ppm	ASTM D5185m	200	106	365	49
Phosphorus	ppm	ASTM D5185m	300	557	406	368
Zinc	ppm	ASTM D5185m	370	731	522	441
Sulfur	ppm	ASTM D5185m	2500	1572	1377	751
Visc @ 40°C	cSt	ASTM D445	46	44.6	28.8	27.4

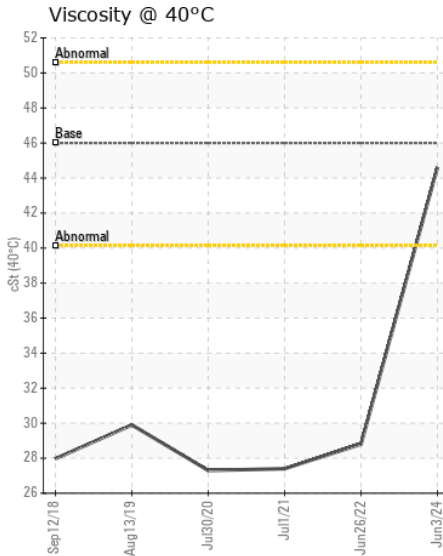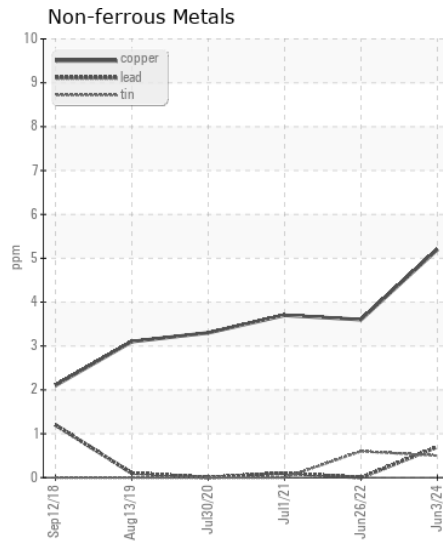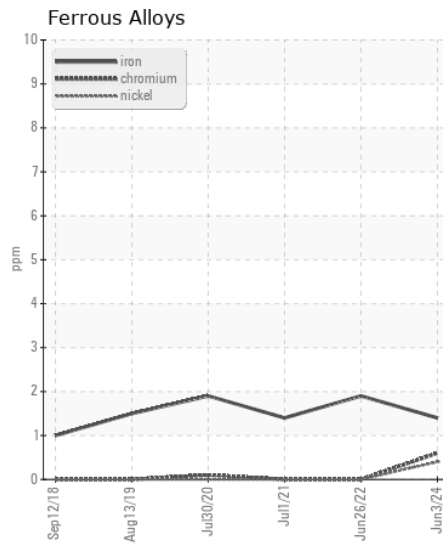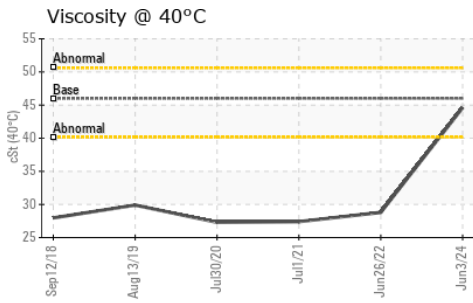

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947540
Lab Number : 06222726
Unique Number : 11100923
Test Package : FLEET
Received : 27 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 29 Jun 2024 - Don Baldrige

UNIVERSITY PARK FIRE DEPT
 3800 UNIVERSITY DR
 DALLAS, TX
 US 75205
 Contact: TERRY FOWLER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (972)965-6485

F: