



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ANN ELISE
Component
Starboard Main Engine
Fluid
CHEVRON DELO 400 LE 15W40 (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0071592	MW0061911	MW0062023
Sample Date		Client Info		15 Jun 2024	16 May 2024	25 Jan 2024
Machine Age	hrs	Client Info		6998	0	4597
Oil Age	hrs	Client Info		354	1335	467
Filter Age	hrs	Client Info		456	750	467
Oil Changed		Client Info		N/A	Not Changd	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	5	10	7
Chromium	ppm	ASTM D5185m	>8	0	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m	>3	6	8	6
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>15	3	3	3
Lead	ppm	ASTM D5185m	>18	1	4	3
Copper	ppm	ASTM D5185m	>80	31	57	44
Tin	ppm	ASTM D5185m	>14	0	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	6	4
Potassium	ppm	ASTM D5185m	>20	4	3	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.4	9.7	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	22.6	22.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	3	2	2
Boron	ppm	ASTM D5185m		173	205	192
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		77	86	81
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		653	715	694
Calcium	ppm	ASTM D5185m		1526	1640	1522
Phosphorus	ppm	ASTM D5185m	1200	669	694	716
Zinc	ppm	ASTM D5185m	1300	811	899	849
Sulfur	ppm	ASTM D5185m	3200	3035	3040	2677
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	18.8	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	8.1	7.4	7.5
Visc @ 100°C	cSt	ASTM D445	15.7	13.8	13.6	13.9

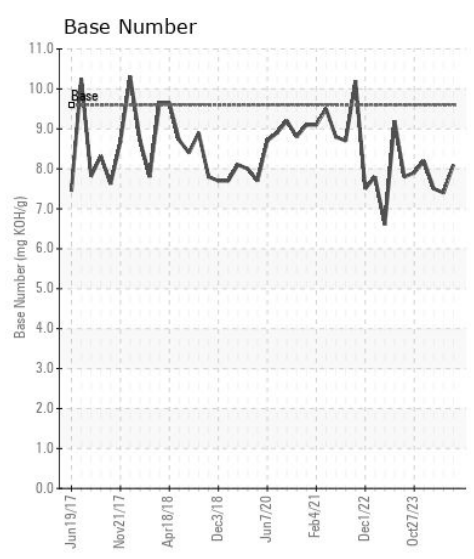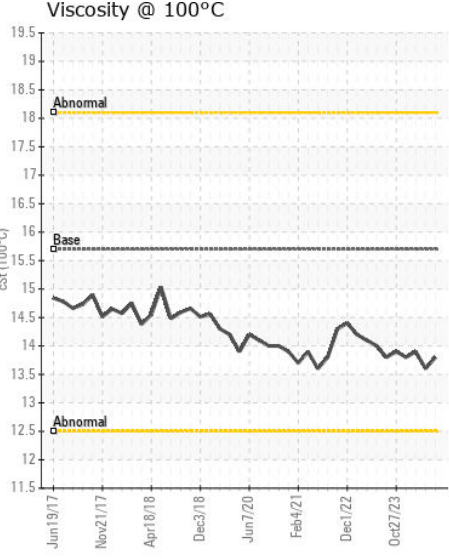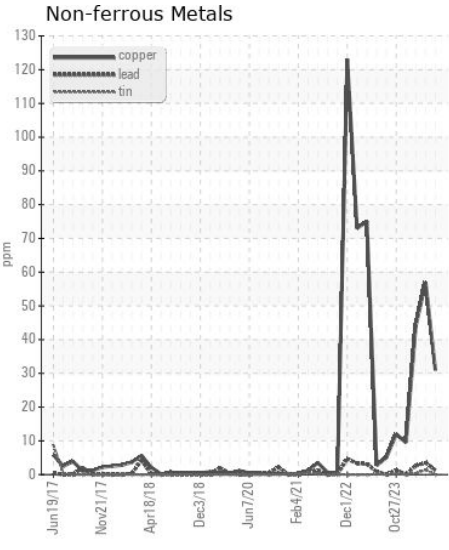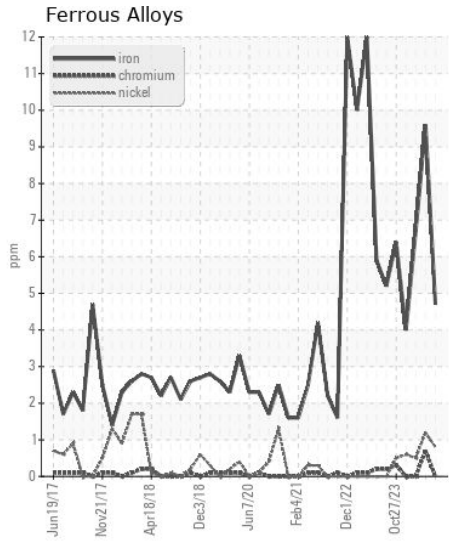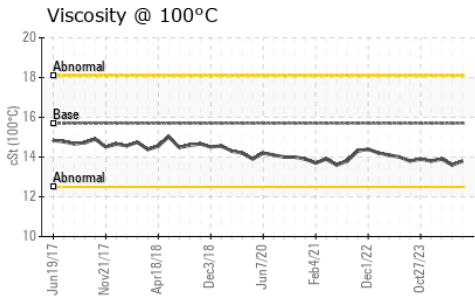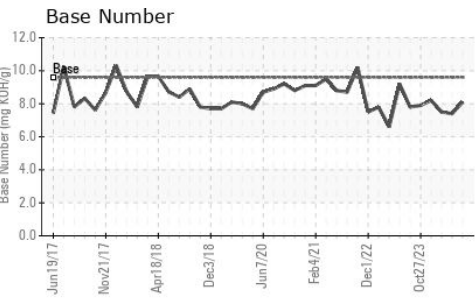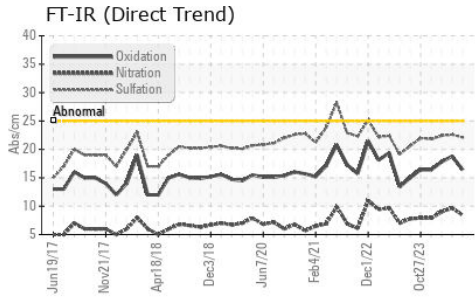

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0071592
Lab Number : 06222973
Unique Number : 11101170
Test Package : MAR 2

Received : 27 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (601)638-8028