



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L220H 2440
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (13 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002104	VCP356190	VCP294172
Sample Date		Client Info		19 Jun 2024	26 Apr 2022	03 Dec 2020
Machine Age	hrs	Client Info		13825	9289	6192
Oil Age	hrs	Client Info		13825	0	0
Filter Age	hrs	Client Info		13825	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	2	4	4
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	1	<1
Titanium	ppm	ASTM D5185m		<1	<1	16
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	1	0
Lead	ppm	ASTM D5185m	>40	0	2	<1
Copper	ppm	ASTM D5185m	>20	1	3	<1
Tin	ppm	ASTM D5185m	>20	0	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	4	1
Potassium	ppm	ASTM D5185m	>20	4	<1	2
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.0	8.1	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	20.5	19.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	1
Boron	ppm	ASTM D5185m	2.5	42	27	75
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	34	56	34
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	285	769	718
Calcium	ppm	ASTM D5185m	2057	2153	1470	1629
Phosphorus	ppm	ASTM D5185m	935	1006	1060	771
Zinc	ppm	ASTM D5185m	1223	1244	1232	788
Sulfur	ppm	ASTM D5185m	4079	4304	2880	2990
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.5	15.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.8	8.8	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.8	12.8	13.7

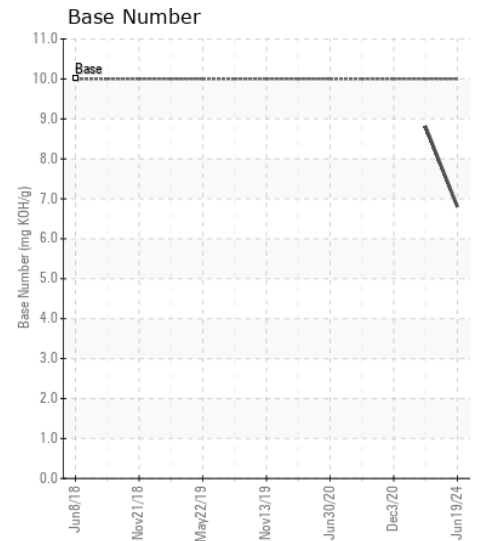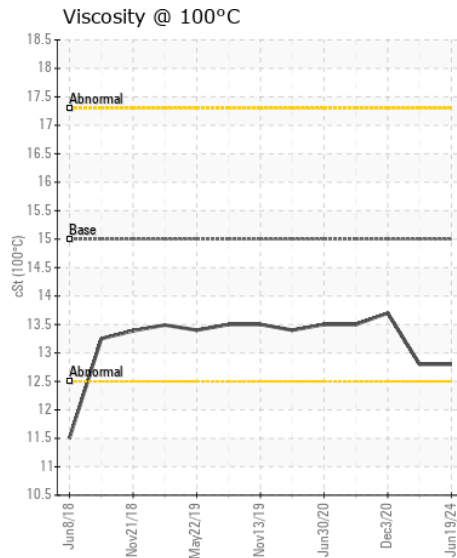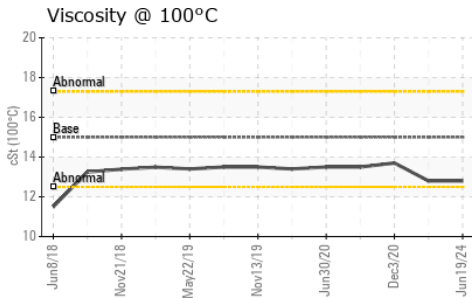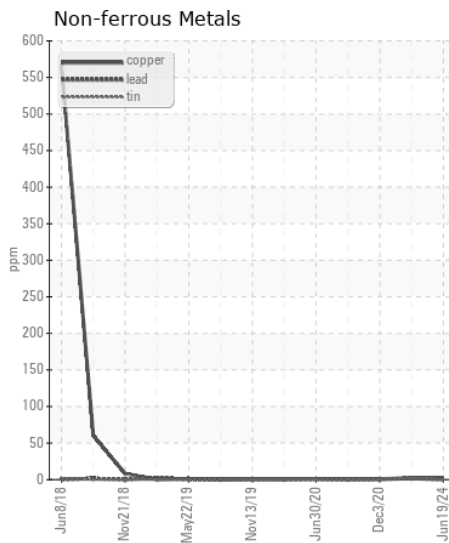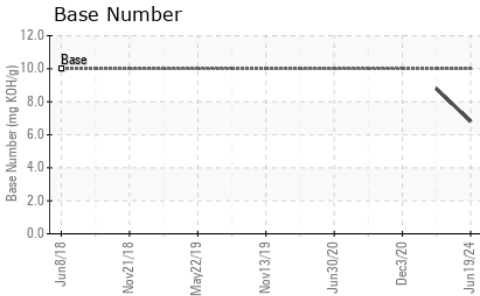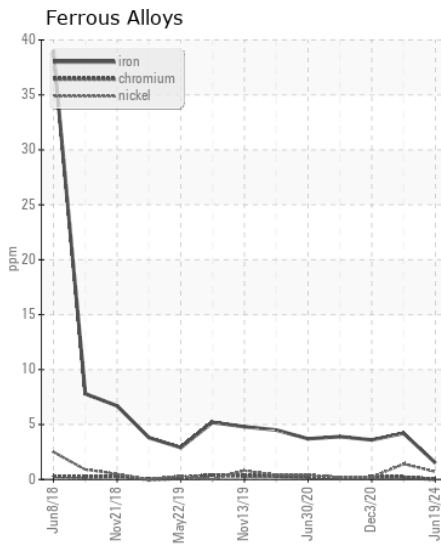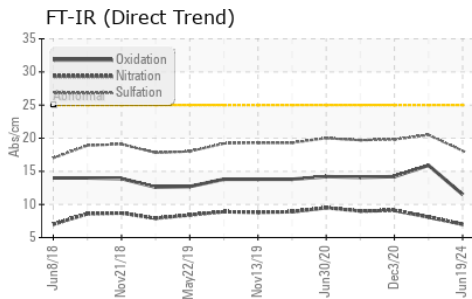

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002104 **Received** : 27 Jun 2024
Lab Number : 06223017 **Tested** : 28 Jun 2024
Unique Number : 11101214 **Diagnosed** : 30 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

SAVAGE STONE-A DIV OF LAUREL SAND & GRAVEL
 8420 WASHINGTON BLVD
 JESSUP, MD
 US 20794
 Contact: OWEN STEWART
 ostewart@savagestone.com
 T: (410)982-1652
 F: (301)470-4075

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)