

BOWERMAN - ORANGE COUNTY CA Machine Id SUTTON STROMART BOW 3 Component Coolant

CHEVRON DELO EXTENDED LIFE COOLANT (--- GAL)

RECOMMENDATION


No corrective action is recommended at this time. The fluid is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0848342	WC0848269	WC0848285
Sample Date		Client Info		25 Jun 2024	29 Mar 2024	09 Jan 2024
Machine Age	hrs	Client Info		66530	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Total Dissolved Solids				452.0	444.5	447.5
Coolant Appearance		*Visual	Clear	normal	normal	normal
Boiling Point	°C	WC Method		231	230	
Specific Gravity		*ASTM D1298		1.081	1.080	1.081
рН	Scale 0-14	ASTM D1287		7.87	8.30	8.02
Nitrites	ppm	AP-053:2009		NT	NT	NT
Reserve Alkalinity	Scale 0-20	*ASTM D1121				
Percentage Glycol	%	ASTM D3321		61.1	60.5	61.1
Freezing Point	°F	ASTM D3321		-59	-57	-59
Carboxylate				fail	fail	pass
Coolant Color		*Visual		Red	Red	Red

CORROSION

CONTAMINANTS

There is no indication of any contamination in the coolant.

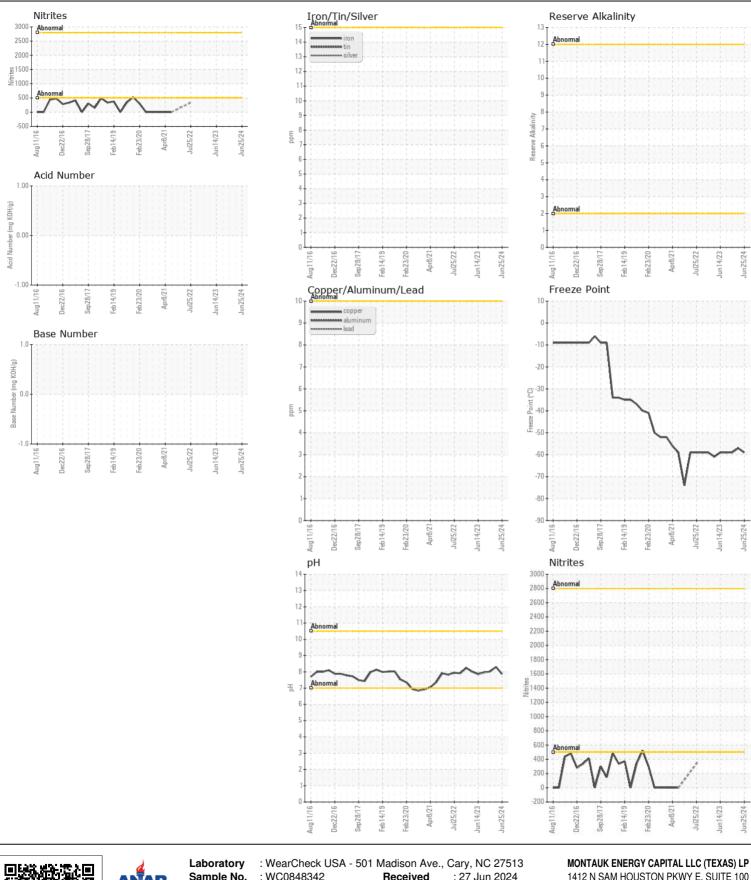

Sample No. : WC0848342 Received 1412 N SAM HOUSTON PKWY E, SUITE 100 : 27 Jun 2024 Lab Number : 06223069 HOUSTON, TX Tested : 01 Jul 2024 : 01 Jul 2024 - Jonathan Hester US 77032 Unique Number : 11101266 Diagnosed Test Package : COOL- (Additional Tests: GlycolType, TAN Man, TBN) Contact: DAMON MCCLENAN Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. dmcclenan@montaukenergy.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (713)781-1126 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (713)781-1127

Contact/Location: DAMON MCCLENAN - VIRHOU Page 2 of 2