



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[730410]

Machine Id

310132 VOLVO EC380 310132

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439840	VCP454233	VCP357327
Sample Date		Client Info		25 Jun 2024	05 Apr 2024	31 May 2022
Machine Age	hrs	Client Info		11538	11210	8553
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

The copper level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	4	6
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	2
Lead	ppm	ASTM D5185m	>20	2	2	<1
Copper	ppm	ASTM D5185m	>15	▲ 56	1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	4	4
Potassium	ppm	ASTM D5185m	>20	1	<1	1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.3	7.0	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	18.9	22.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	2
Boron	ppm	ASTM D5185m	2.5	<1	0	33
Barium	ppm	ASTM D5185m	0.0	1	0	0
Molybdenum	ppm	ASTM D5185m	0.7	64	58	40
Manganese	ppm	ASTM D5185m	0.0	1	0	<1
Magnesium	ppm	ASTM D5185m	256	994	1001	532
Calcium	ppm	ASTM D5185m	2057	1092	1111	1613
Phosphorus	ppm	ASTM D5185m	935	994	1055	968
Zinc	ppm	ASTM D5185m	1223	1229	1287	1184
Sulfur	ppm	ASTM D5185m	4079	2900	3743	2557
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	15.1	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.2	8.6	10.7
Visc @ 100°C	cSt	ASTM D445	15.0	12.3	12.5	12.7


▲ Non-ferrous Metals

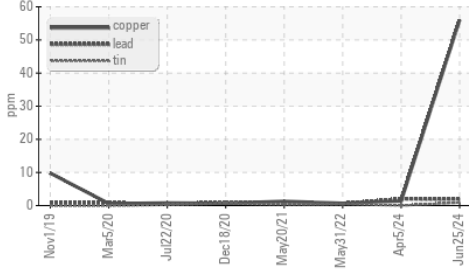


Iron (ppm)

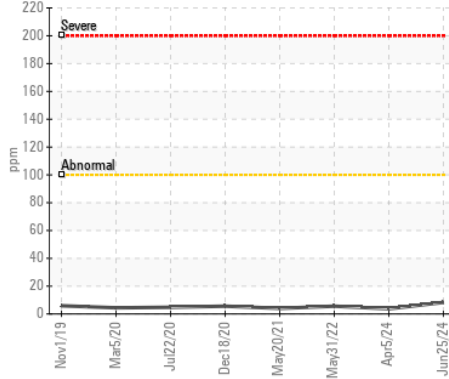


Lead (ppm)

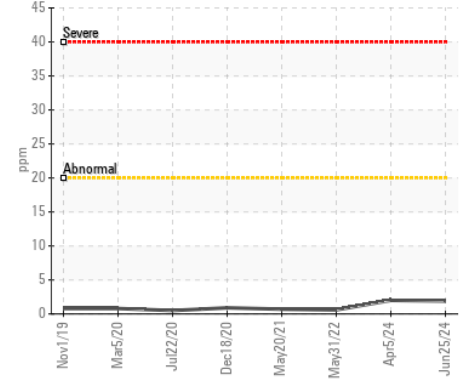


FT-IR (Direct Trend)

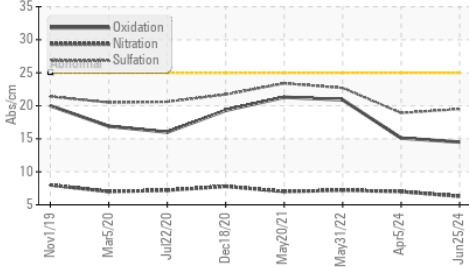


Aluminum (ppm)

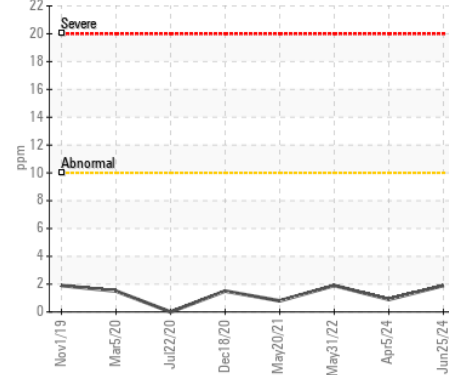


Chromium (ppm)

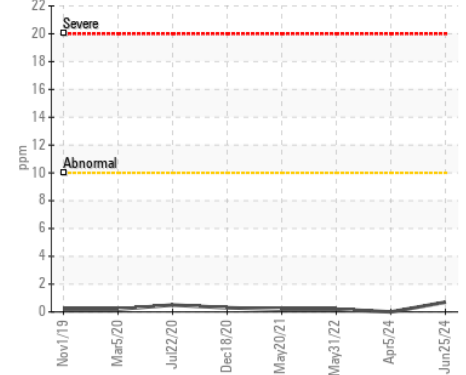


Base Number

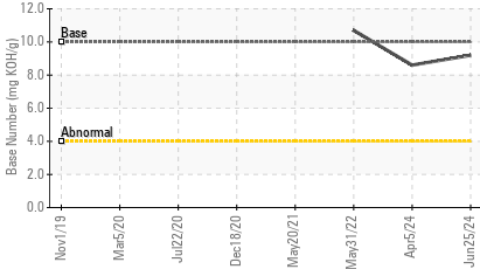


▲ Copper (ppm)

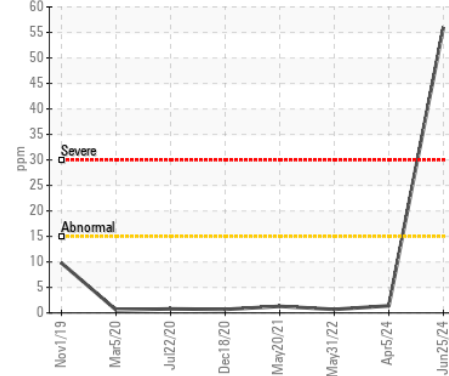


Silicon (ppm)

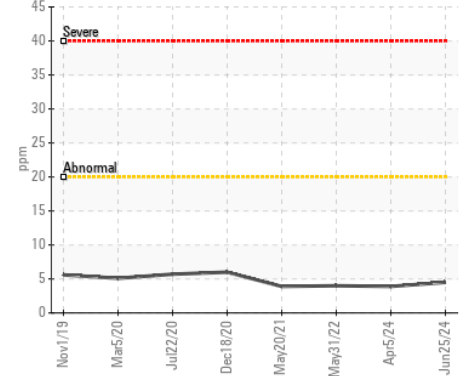


Viscosity @ 100°C

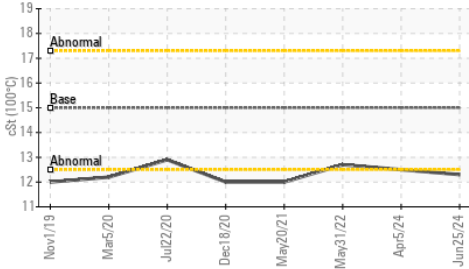


Viscosity @ 100°C

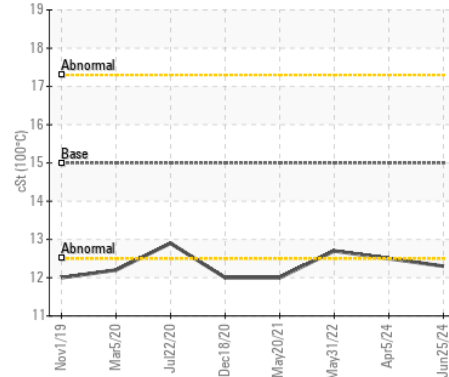

Base Number

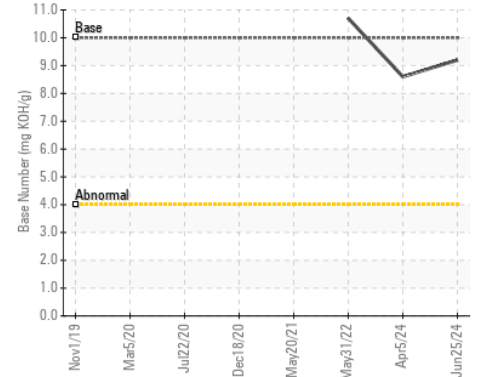

Glycol Contamination

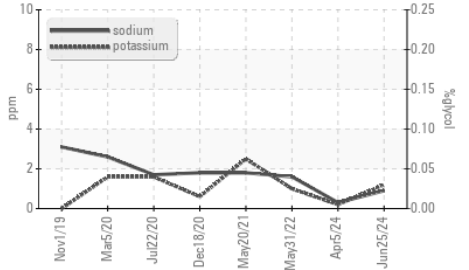

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439840 **Received** : 28 Jun 2024
Lab Number : 06223090 **Tested** : 01 Jul 2024
Unique Number : 11101287 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

TRADEMARK METALS RECYCLING - SUNSHINE
 13200 CAIRO LN
 OPA LOCKA, FL
 US 33054
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: