



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
733001
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114765	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		3349	---	---
Oil Age	hrs	Client Info		3349	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>50	14	---	---
Chromium	ppm	ASTM D5185m	>5	2	---	---
Nickel	ppm	ASTM D5185m	>4	2	---	---
Titanium	ppm	ASTM D5185m	>5	<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>40	10	---	---
Copper	ppm	ASTM D5185m	>150	7	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m	50	10	---	---
Barium	ppm	ASTM D5185m	5	1	---	---
Molybdenum	ppm	ASTM D5185m	50	57	---	---
Manganese	ppm	ASTM D5185m	0	1	---	---
Magnesium	ppm	ASTM D5185m	560	566	---	---
Calcium	ppm	ASTM D5185m	1510	1605	---	---
Phosphorus	ppm	ASTM D5185m	780	680	---	---
Zinc	ppm	ASTM D5185m	870	961	---	---
Sulfur	ppm	ASTM D5185m	2040	2395	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	3.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	---	---

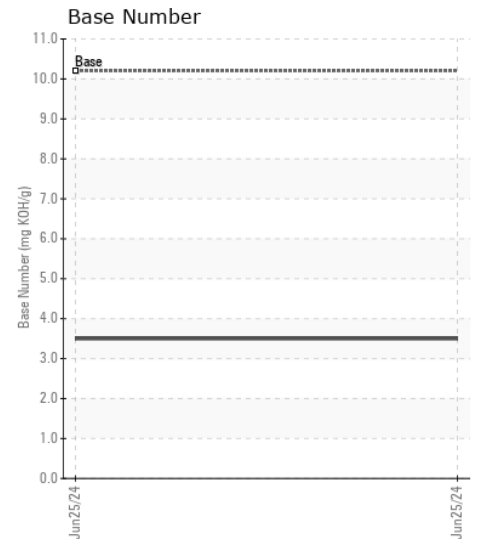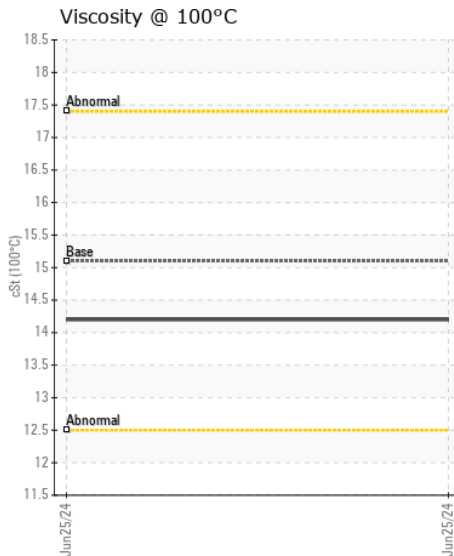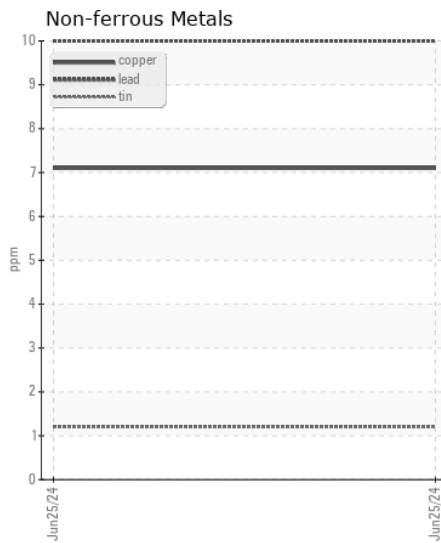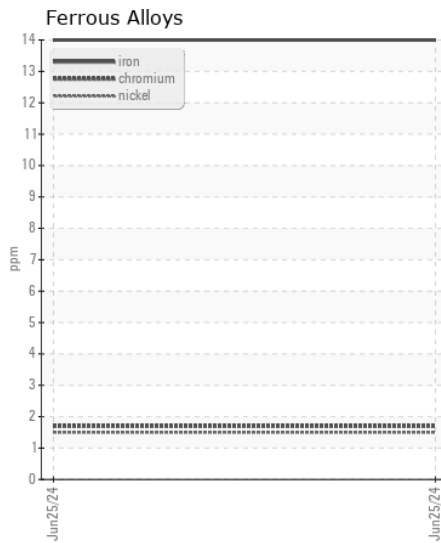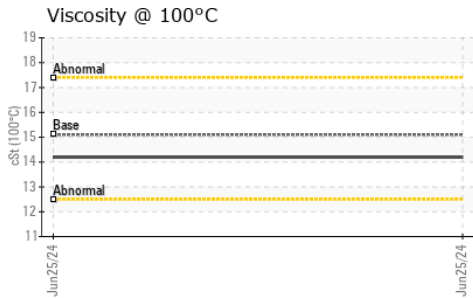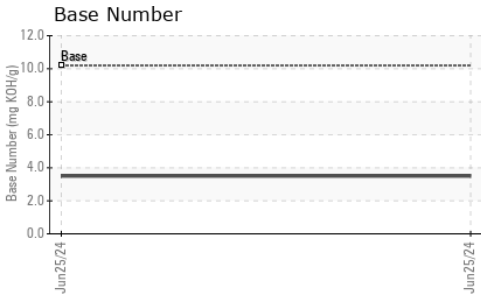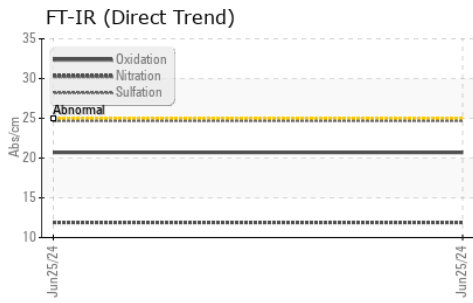

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114765
Lab Number : 06223132
Unique Number : 11101329
Test Package : FLEET

Received : 28 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

GFL Environmental - 963 - Peoria HC Disposal
 1113 N. Swords Ave.
 West Peoria, IL
 US 61604
 Contact: Corey Dozard
 cdozard@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: