



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
{UNASSIGNED}
Machine Id
PETERBILT 1208
Component
1 Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0858421	WC0840412	---
Sample Date		Client Info		30 May 2024	15 Jan 2024	---
Machine Age	hrs	Client Info		650	650	---
Oil Age	hrs	Client Info		650	650	---
Filter Age	hrs	Client Info		650	650	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>110	29	14	---
Chromium	ppm	ASTM D5185m	>4	<1	0	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>2	<1	<1	---
Aluminum	ppm	ASTM D5185m	>25	12	7	---
Lead	ppm	ASTM D5185m	>45	<1	1	---
Copper	ppm	ASTM D5185m	>85	2	<1	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	8	5	---
Potassium	ppm	ASTM D5185m	>20	20	18	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.7	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	10.3	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	20.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	3	---
Boron	ppm	ASTM D5185m	250	8	10	---
Barium	ppm	ASTM D5185m	10	1	0	---
Molybdenum	ppm	ASTM D5185m	100	68	65	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	848	796	---
Calcium	ppm	ASTM D5185m	3000	1284	1185	---
Phosphorus	ppm	ASTM D5185m	1150	1014	1033	---
Zinc	ppm	ASTM D5185m	1350	1298	1247	---
Sulfur	ppm	ASTM D5185m	4250	3008	3035	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.4	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.9	6.9	---
Visc @ 100°C	cSt	ASTM D445	14.4	15.1	14.6	---

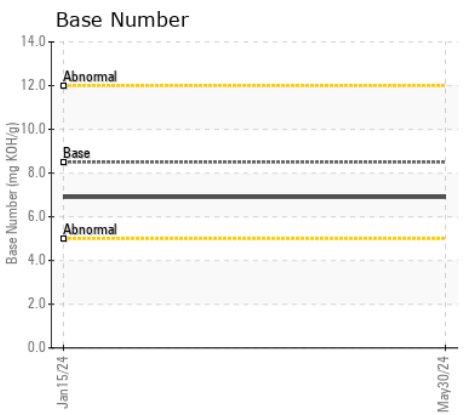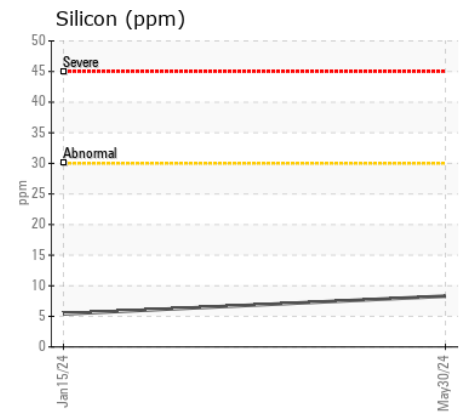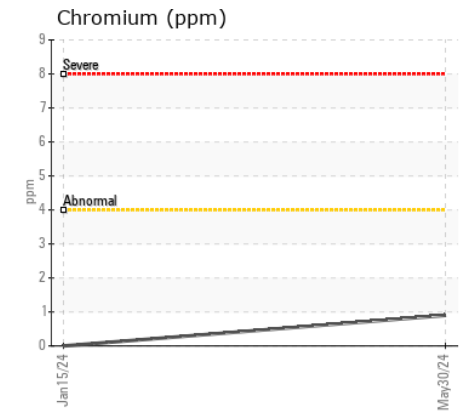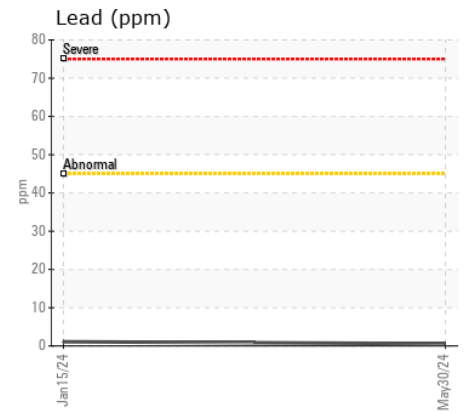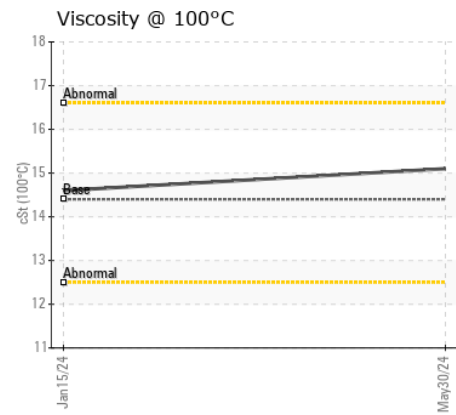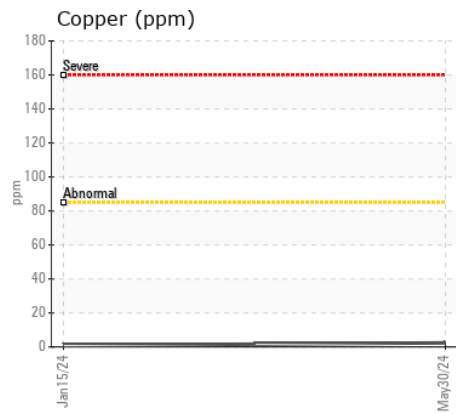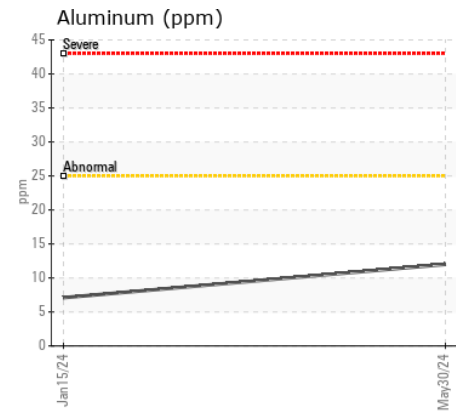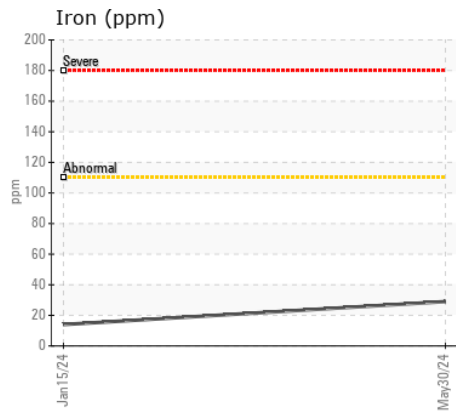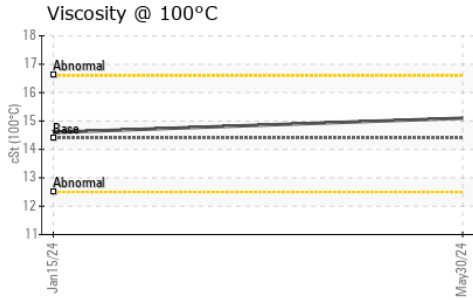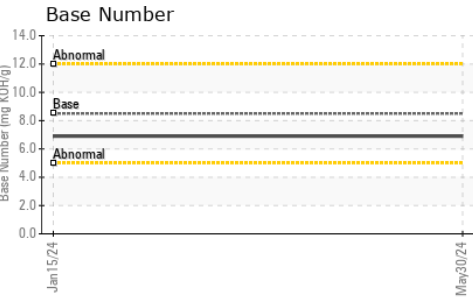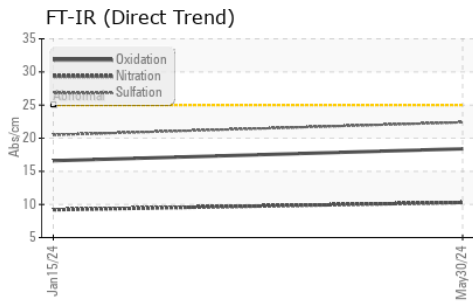

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0858421 **Received** : 28 Jun 2024
Lab Number : 06223141 **Tested** : 28 Jun 2024
Unique Number : 11101338 **Diagnosed** : 28 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-ROCKAWAY
 311 WEST MAIN STREET, STE 8
 ROCKAWAY, NJ
 US 07866
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: