



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PETERBILT 827752**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON DELO 400 SAE 10W30 (44 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0004777</b>	RPL0004628	---
Sample Date		Client Info		<b>30 May 2024</b>	05 Jul 2022	---
Machine Age	mls	Client Info		<b>381034</b>	285303	---
Oil Age	mls	Client Info		<b>56295</b>	36506	---
Filter Age	mls	Client Info		<b>56295</b>	36506	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	<b>130</b>	42	---
Chromium	ppm	ASTM D5185m	>5	<b>6</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	0	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>18</b>	4	---
Lead	ppm	ASTM D5185m	>150	<b>17</b>	11	---
Copper	ppm	ASTM D5185m	>90	<b>3</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	<b>16</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>35</b>	6	---
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>7.5	<b>1.4</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.8</b>	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>33.8</b>	28.0	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	<1	---
Boron	ppm	ASTM D5185m		<b>41</b>	6	---
Barium	ppm	ASTM D5185m		<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>96</b>	4	---
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>461</b>	41	---
Calcium	ppm	ASTM D5185m		<b>1637</b>	2563	---
Phosphorus	ppm	ASTM D5185m	1260	<b>1133</b>	949	---
Zinc	ppm	ASTM D5185m	1400	<b>1445</b>	1172	---
Sulfur	ppm	ASTM D5185m		<b>3389</b>	4398	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>30.7</b>	18.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>3.8</b>	5.1	---
Visc @ 100°C	cSt	ASTM D445	11.1	<b>10.5</b>	11.2	---

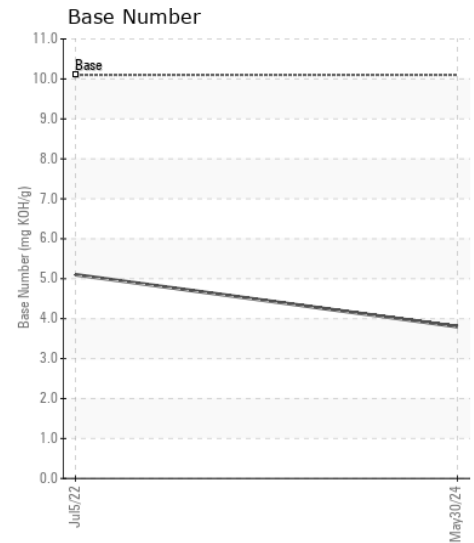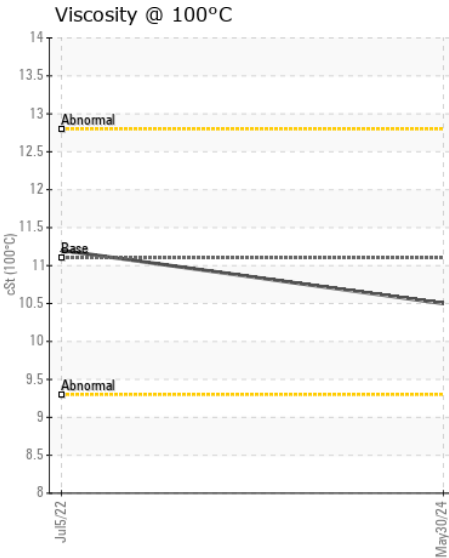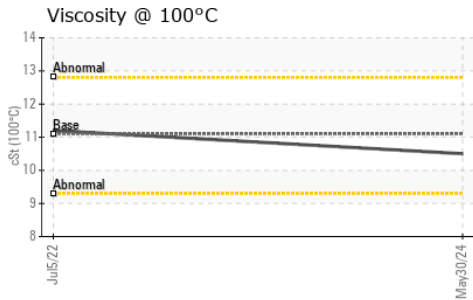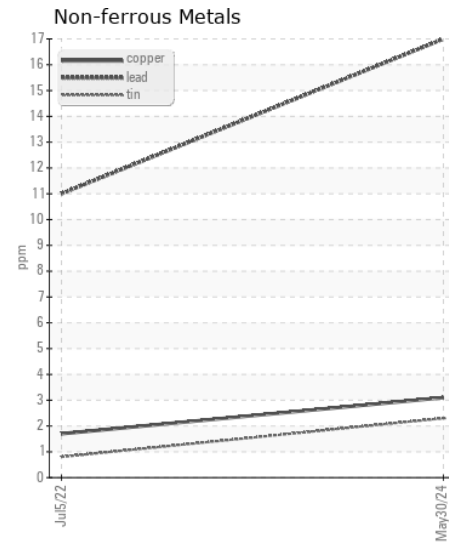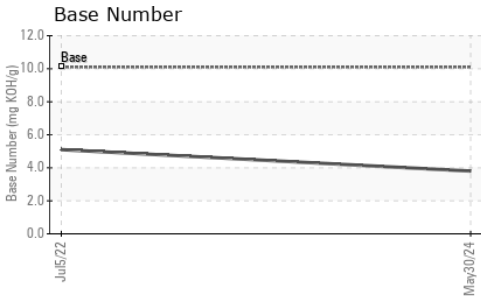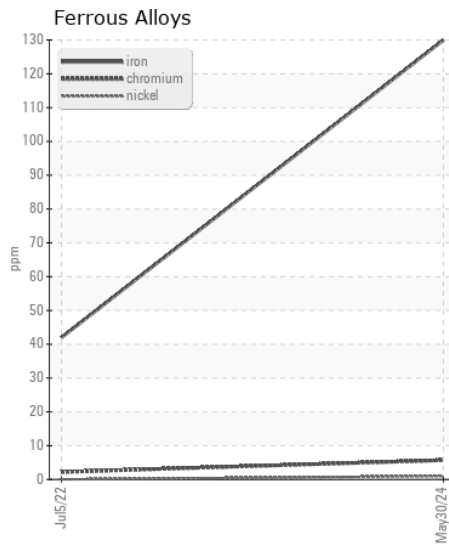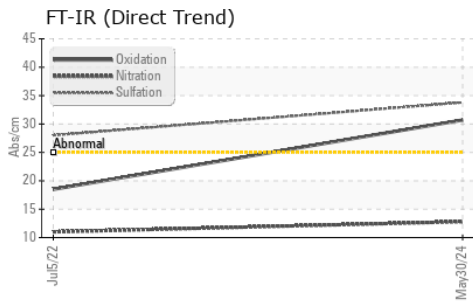

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0004777

**Lab Number** : 06223167

**Unique Number** : 11101364

**Test Package** : FLEET

**Received** : 28 Jun 2024

**Tested** : 28 Jun 2024

**Diagnosed** : 30 Jun 2024 - Don Baldrige

**RTL PACLEASE - 7009 - Nashville**

900 Expo Dr.

Smyrna, TN

US 37167

Contact: Jon Atwood

AtwoodJ@RushEnterprises.com

T: (800)489-7403

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)