



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Sloatsburg
Machine Id
PETERBILT 6626
Component
Diesel Engine
Fluid
GIBRALTAR 15W/40 SUPER S-3 LX (11)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0870993	---	---
Sample Date		Client Info		13 May 2024	---	---
Machine Age	hrs	Client Info		16887	---	---
Oil Age	hrs	Client Info		600	---	---
Filter Age	hrs	Client Info		600	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	23	---	---
Chromium	ppm	ASTM D5185m	>4	2	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>45	4	---	---
Copper	ppm	ASTM D5185m	>85	2	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	7	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		13	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m	66	64	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	1000	868	---	---
Calcium	ppm	ASTM D5185m	1050	1209	---	---
Phosphorus	ppm	ASTM D5185m	1150	1020	---	---
Zinc	ppm	ASTM D5185m	1270	1267	---	---
Sulfur	ppm	ASTM D5185m		3195	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.9	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	13.8	---	---

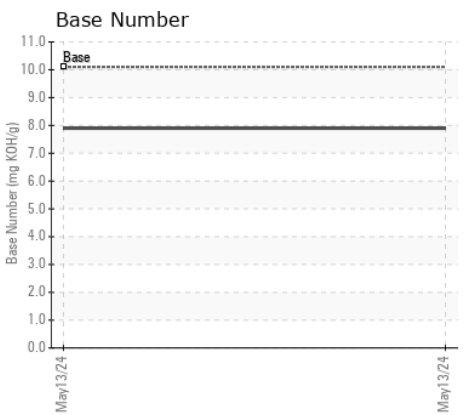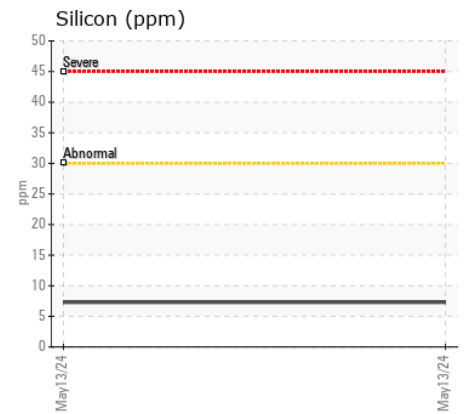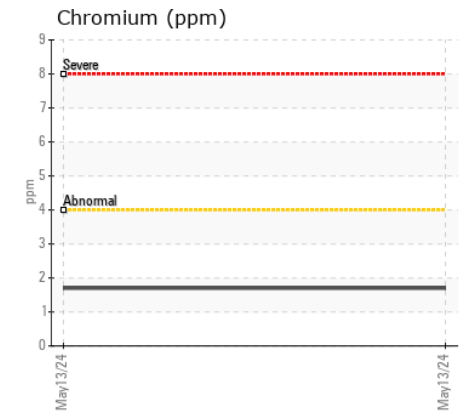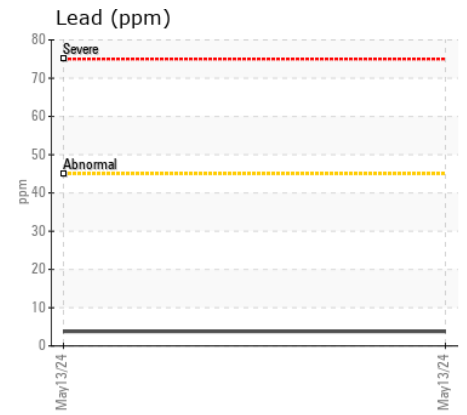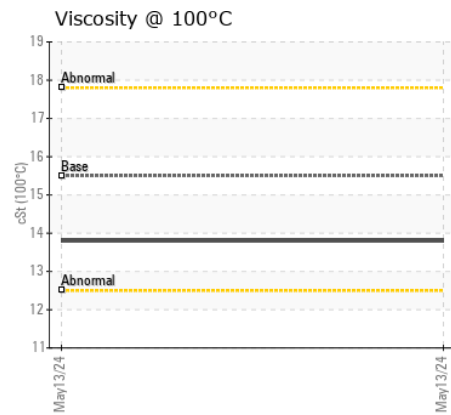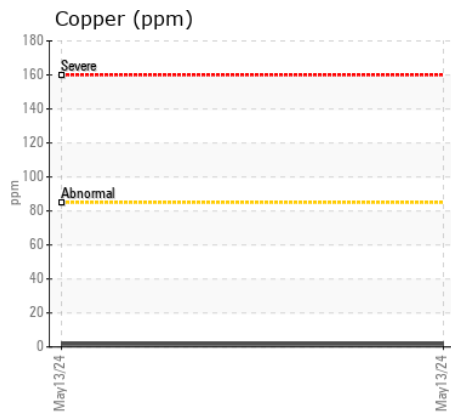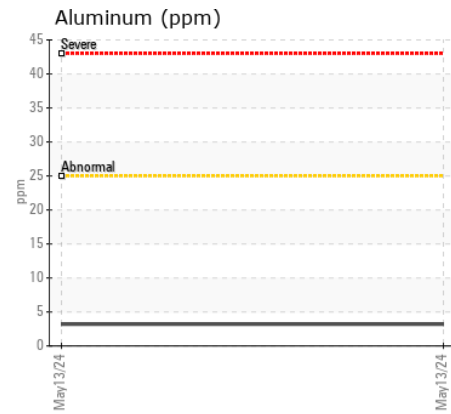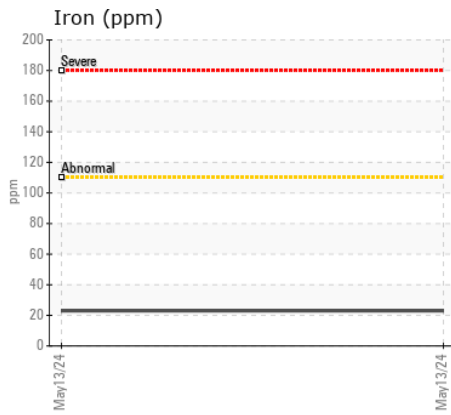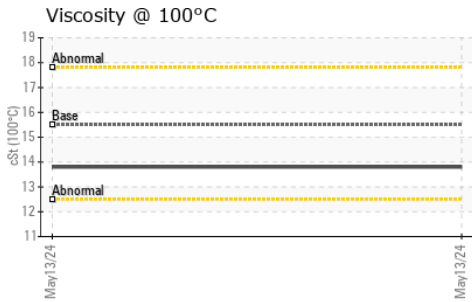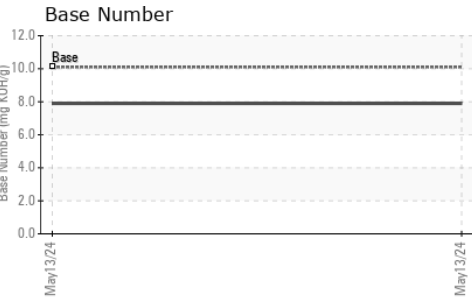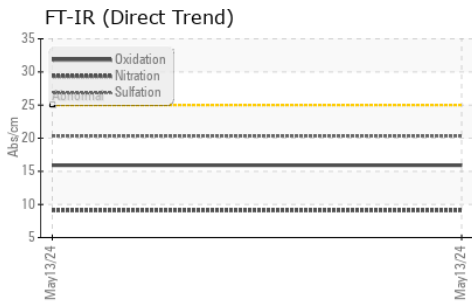

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0870993 **Received** : 28 Jun 2024
Lab Number : 06223168 **Tested** : 28 Jun 2024
Unique Number : 11101365 **Diagnosed** : 28 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

INTERSTATE WASTE-SLOATSBURG
 200 STERLING MINE ROAD
 SLOATSBURG, NY
 US 10974
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: