



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**933022**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0124052</b>	GFL0120202	GFL0117209
Sample Date		Client Info		<b>26 Jun 2024</b>	04 Jun 2024	24 Apr 2024
Machine Age	hrs	Client Info		<b>4239</b>	4079	3829
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>11</b>	12	5
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>9</b>	9	1
Lead	ppm	ASTM D5185m	>30	<b>19</b>	19	0
Copper	ppm	ASTM D5185m	>35	<b>11</b>	10	0
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>11</b>	12	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	7	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.5</b>	12.4	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.3</b>	27.9	17.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	5	4
Boron	ppm	ASTM D5185m	50	<b>6</b>	7	5
Barium	ppm	ASTM D5185m	5	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	61	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	560	<b>633</b>	611	947
Calcium	ppm	ASTM D5185m	1510	<b>1842</b>	1683	1135
Phosphorus	ppm	ASTM D5185m	780	<b>879</b>	885	1044
Zinc	ppm	ASTM D5185m	870	<b>1077</b>	1058	1268
Sulfur	ppm	ASTM D5185m	2040	<b>2943</b>	2657	3706
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>25.3</b>	24.5	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>2.2</b>	2.6	8.1
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.5</b>	13.5	13.5

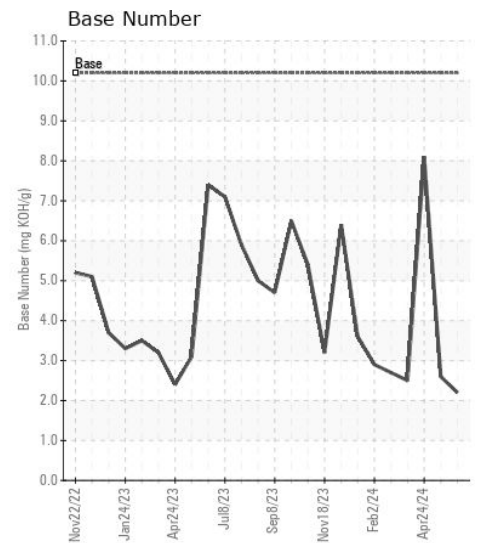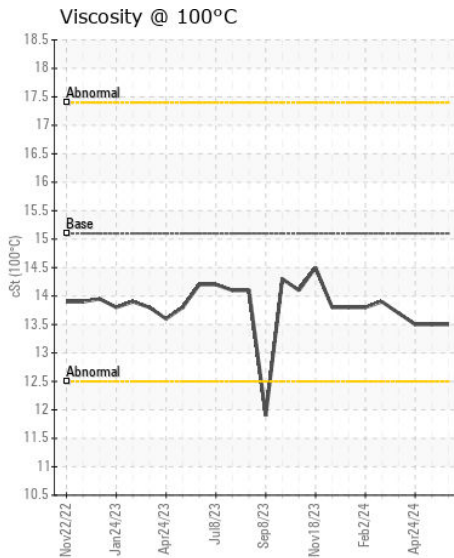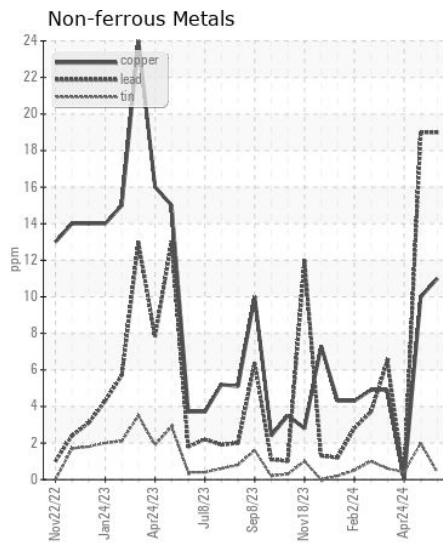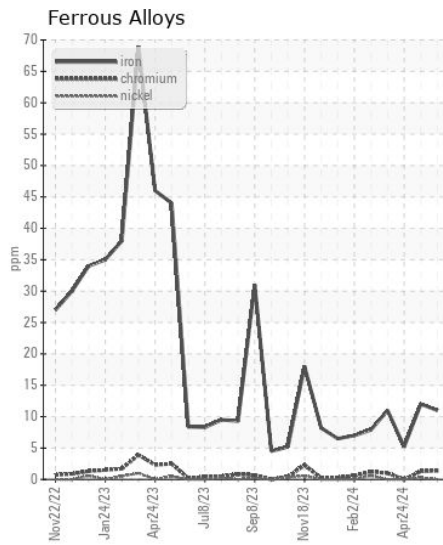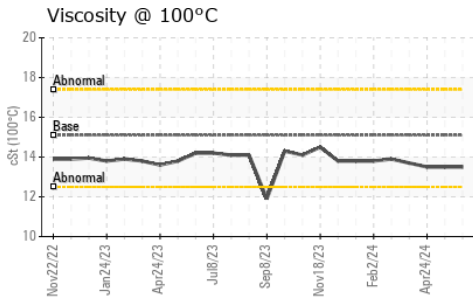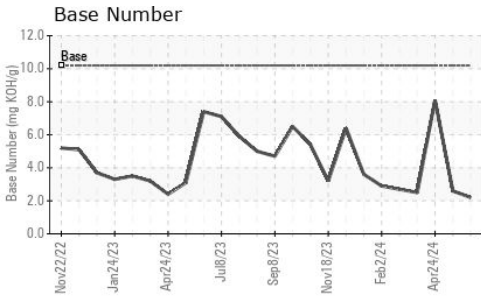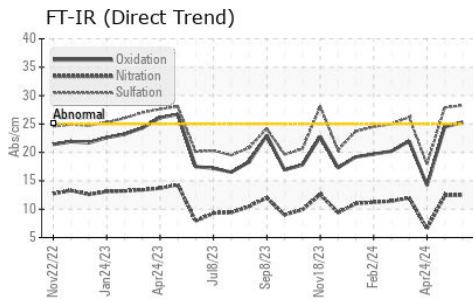

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0124052  
**Lab Number** : 06223209  
**Unique Number** : 11101406  
**Test Package** : FLEET

**Received** : 28 Jun 2024  
**Tested** : 28 Jun 2024  
**Diagnosed** : 30 Jun 2024 - Don Baldrige

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: