



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
813109
 Component
1 Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.
 Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0123769	GFL0112997	---
Sample Date		Client Info		25 Jun 2024	16 Apr 2024	---
Machine Age	hrs	Client Info		1550	1181	---
Oil Age	hrs	Client Info		369	1181	---
Filter Age	hrs	Client Info		0	1181	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	18	76	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	2	20	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	1	4	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	6	32	---
Tin	ppm	ASTM D5185m	>15	0	4	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	20	▲ 93	---
Potassium	ppm	ASTM D5185m	>20	2	10	---
Fuel		WC Method	>5	<1.0	0.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	1.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.2	13.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	26.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	4	3	---
Boron	ppm	ASTM D5185m	250	5	53	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	70	123	---
Manganese	ppm	ASTM D5185m		1	7	---
Magnesium	ppm	ASTM D5185m	450	1090	776	---
Calcium	ppm	ASTM D5185m	3000	1266	1521	---
Phosphorus	ppm	ASTM D5185m	1150	1144	766	---
Zinc	ppm	ASTM D5185m	1350	1401	985	---
Sulfur	ppm	ASTM D5185m	4250	3766	2506	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	25.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.0	5.2	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	11.0	---

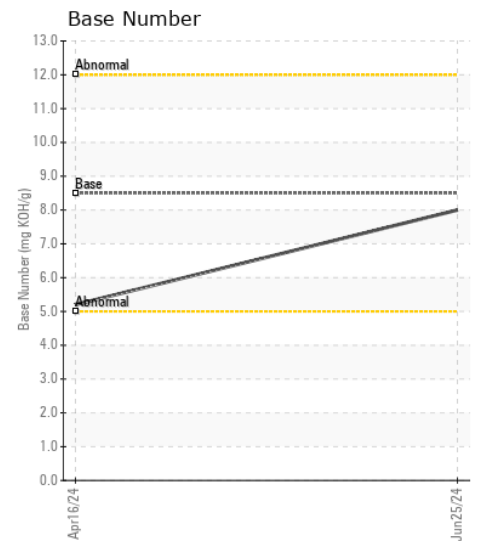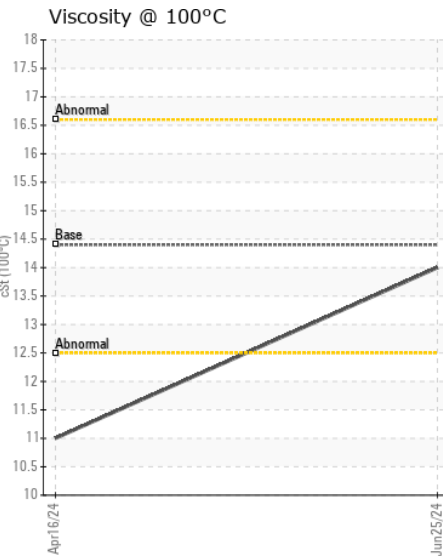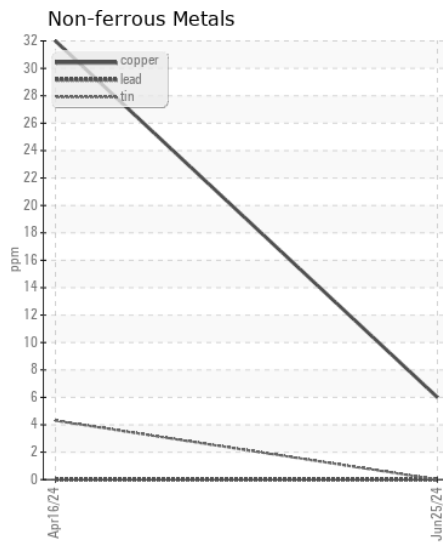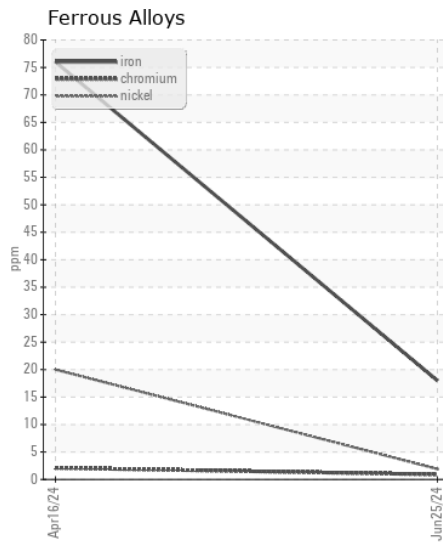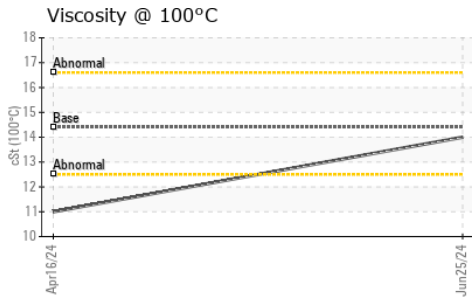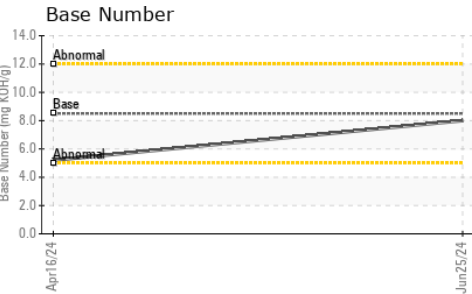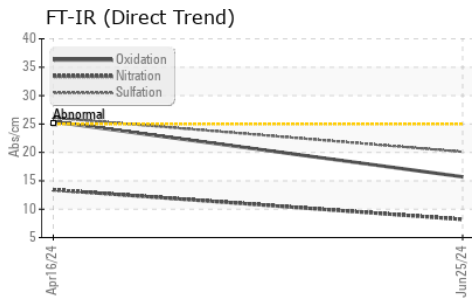

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0123769
Lab Number : 06223214
Unique Number : 11101411
Test Package : FLEET

Received : 28 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Wes Davis

GFL Environmental - 918 - Hartland HC
 630 E Industrial Drive
 Hartland, WI
 US 53029

Contact: David McCall
 david.mccall@gflenv.com

T: (262)369-3069

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: