



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8110528
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0035805	IL0034864	IL06009295
Sample Date		Client Info		06 Jun 2024	24 Feb 2024	27 Oct 2023
Machine Age	hrs	Client Info		381627	8780	333571
Oil Age	hrs	Client Info		9437	0	40000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	8	15
Chromium	ppm	ASTM D5185m	>20	2	0	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	7	4	6
Lead	ppm	ASTM D5185m	>40	4	0	6
Copper	ppm	ASTM D5185m	>330	2	0	2
Tin	ppm	ASTM D5185m	>15	<1	<1	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	6	10
Potassium	ppm	ASTM D5185m	>20	5	3	7
Fuel	%	ASTM D3524	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	12.5	8.8	12.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9	22.4	25.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	<1	3
Boron	ppm	ASTM D5185m		19	35	15
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		46	38	41
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		538	491	488
Calcium	ppm	ASTM D5185m		1914	1498	1614
Phosphorus	ppm	ASTM D5185m		778	703	711
Zinc	ppm	ASTM D5185m		965	839	893
Sulfur	ppm	ASTM D5185m		2774	2032	2275
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.0	21.4	27.3
Base Number (BN)	mg KOH/g	ASTM D2896		6.7	8.0	6.2
Visc @ 100°C	cSt	ASTM D445		11.3	10.8	11.0

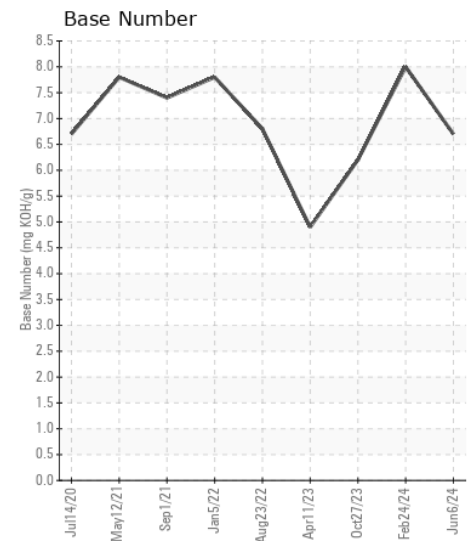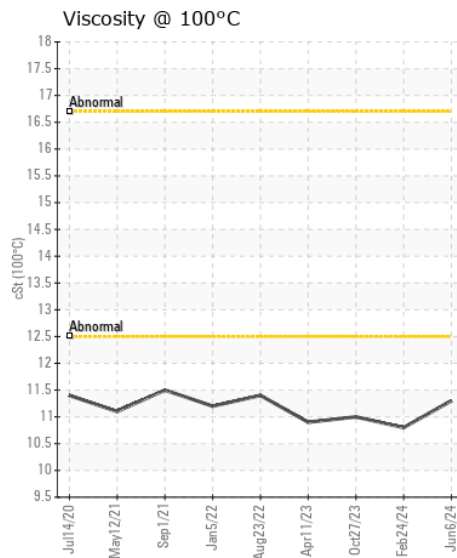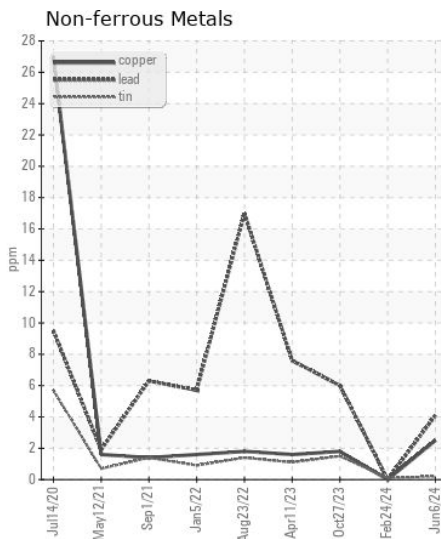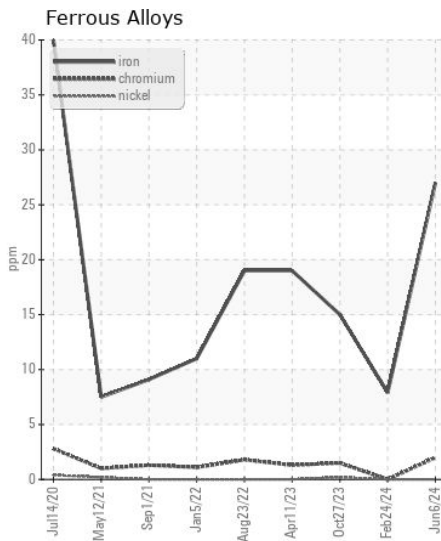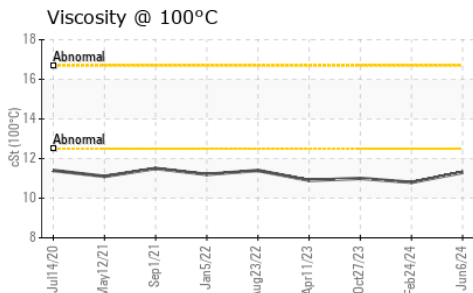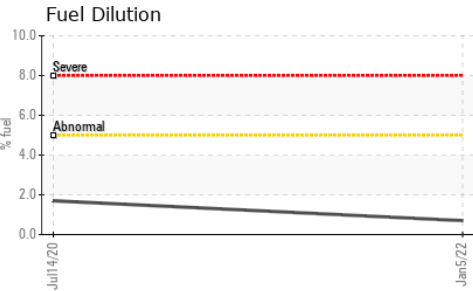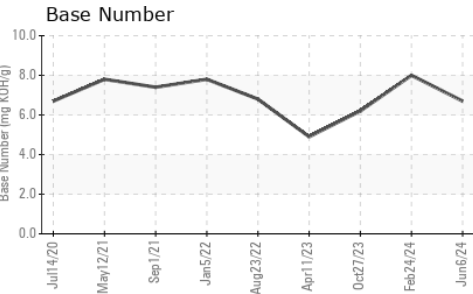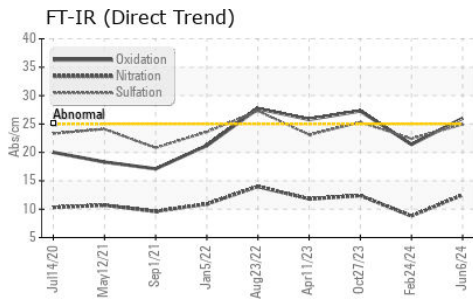

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0035805
Lab Number : 06223229
Unique Number : 11101426
Test Package : FLEET (Additional Tests: FuelDilution)

IDEALISE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331
 Contact: DAVID JOHNS
 davidjohns@idealease.com
 T: (404)699-5571
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)