



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 850L 1T0850LXCNF425942**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211856</b>	JR0180741	JR0179180
Sample Date		Client Info		<b>26 Jun 2024</b>	13 Feb 2024	04 Oct 2023
Machine Age	hrs	Client Info		<b>1951</b>	1464	975
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	ABNORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>37</b>	42	55
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>5	<b>13</b>	▲ 11	▲ 24
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	6	6
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m	>26	<b>4</b>	11	48
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>8</b>	9	10
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	9.0	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	22.2	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>1</b>	2	1
Boron	ppm	ASTM D5185m		<b>160</b>	174	183
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	12	0
Molybdenum	ppm	ASTM D5185m		<b>276</b>	267	262
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m		<b>1016</b>	806	879
Calcium	ppm	ASTM D5185m		<b>1755</b>	1272	1655
Phosphorus	ppm	ASTM D5185m		<b>1053</b>	703	980
Zinc	ppm	ASTM D5185m		<b>1389</b>	1090	1238
Sulfur	ppm	ASTM D5185m		<b>4221</b>	2538	3115
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.2</b>	16.7	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.8</b>	7.8	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.4	13.3


FT-IR (Direct Trend)

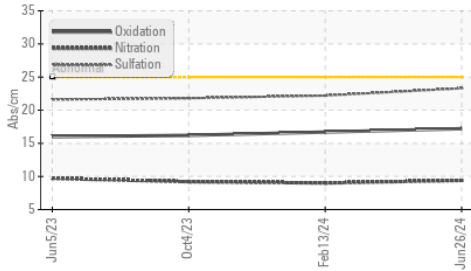


Ferrous Alloys

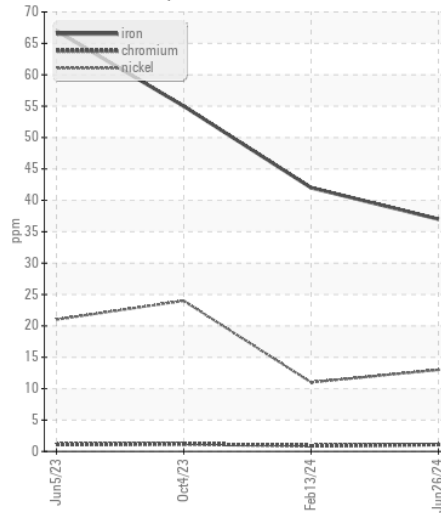


Base Number

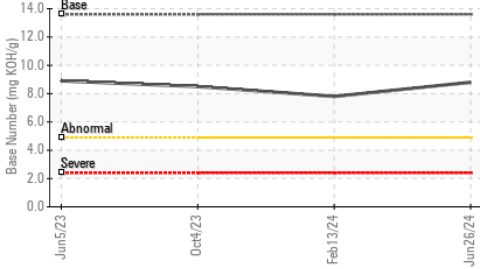


Non-ferrous Metals

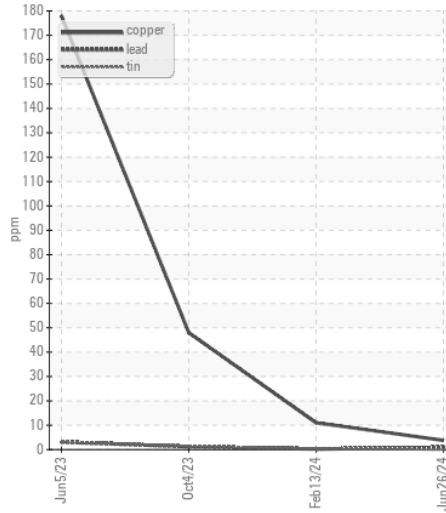


Viscosity @ 100°C

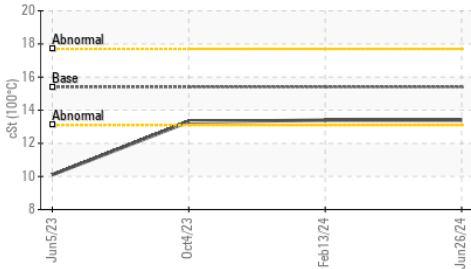


Viscosity @ 40°C

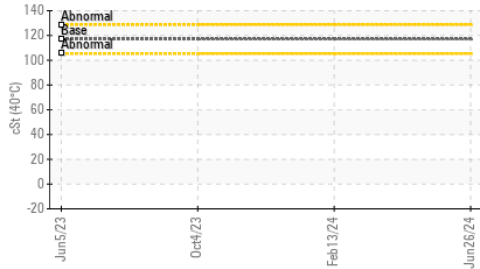

Viscosity @ 100°C

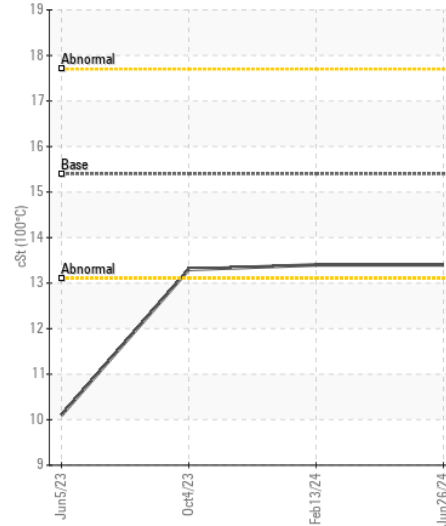

Base Number

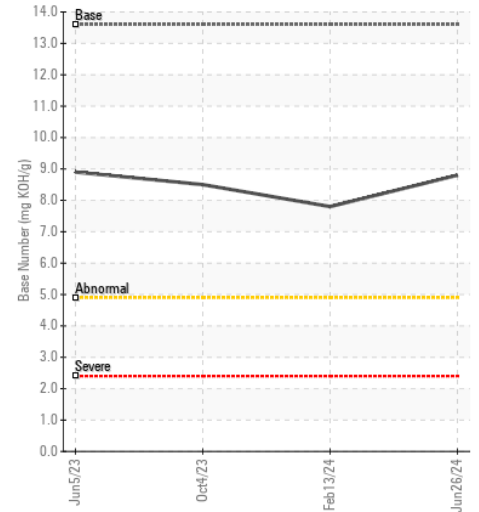

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211856 **Received** : 28 Jun 2024  
**Lab Number** : 06223269 **Tested** : 01 Jul 2024  
**Unique Number** : 11101466 **Diagnosed** : 01 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: KV40, TBN )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005

Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (804)798-6001  
 F: (804)798-0292