



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**MONTGOMERY**

Machine Id

**KENWORTH 123060**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0127237</b>	GFL0083547	GFL0070111
Sample Date		Client Info		<b>25 Jun 2024</b>	02 Apr 2024	04 Jan 2023
Machine Age	hrs	Client Info		<b>19407</b>	19382	19336
Oil Age	hrs	Client Info		<b>71</b>	0	19336
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	42	12
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	8	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	3	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	0.3
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.6</b>	6.5	5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	17.8	17.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	1	<1
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	5	46
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>57</b>	61	68
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>954</b>	949	814
Calcium	ppm	ASTM D5185m	1070	<b>1057</b>	1069	1194
Phosphorus	ppm	ASTM D5185m	1150	<b>1010</b>	1050	908
Zinc	ppm	ASTM D5185m	1270	<b>1297</b>	1270	1103
Sulfur	ppm	ASTM D5185m	2060	<b>3403</b>	3743	3206
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.4</b>	14.4	12.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.9</b>	8.9	9.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.0	14.2

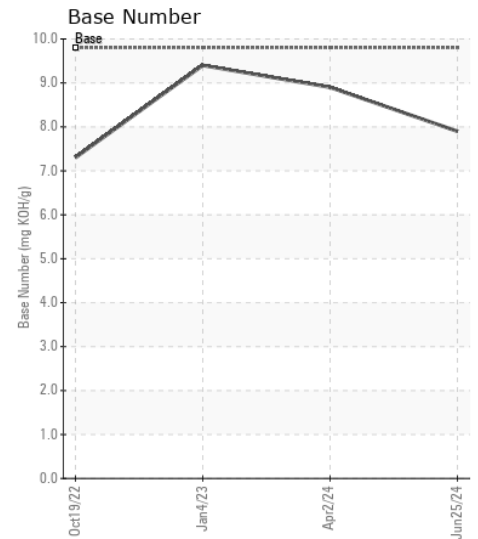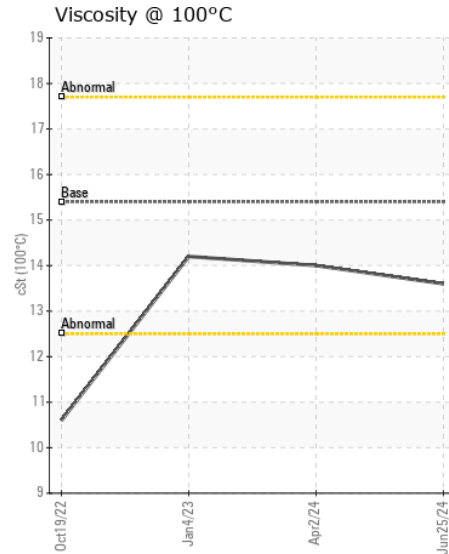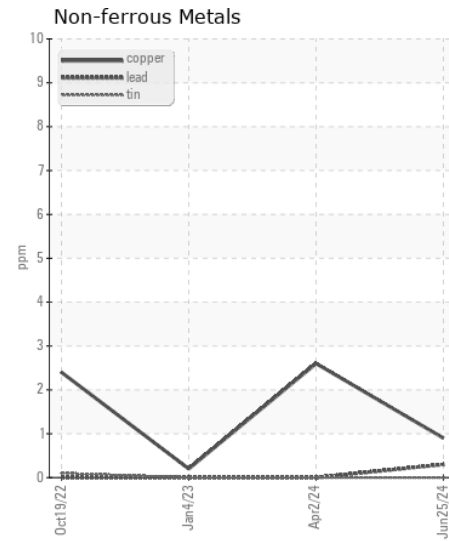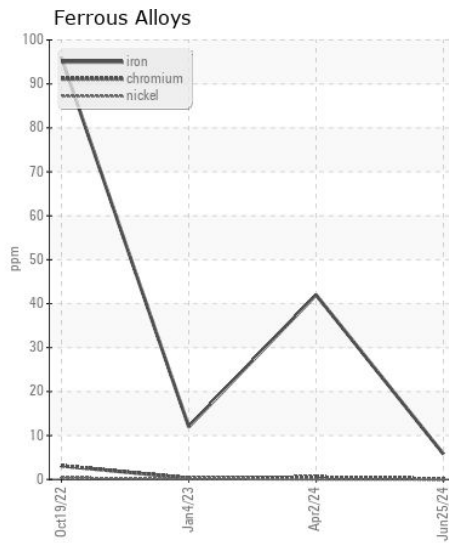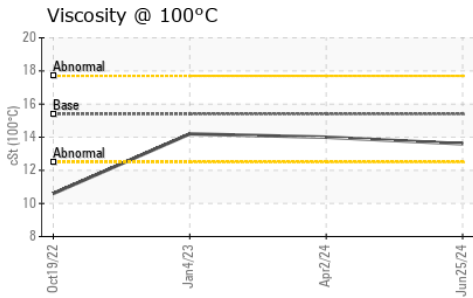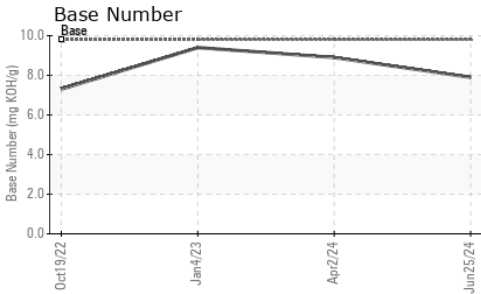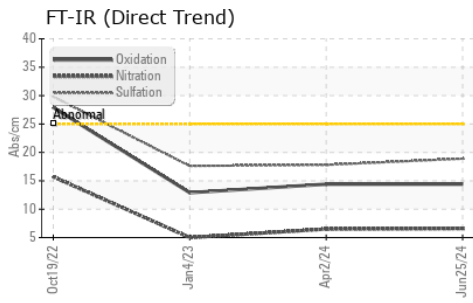

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0127237  
**Lab Number** : 06223327  
**Unique Number** : 11101524  
**Test Package** : FLEET

**Received** : 28 Jun 2024  
**Tested** : 01 Jul 2024  
**Diagnosed** : 01 Jul 2024 - Wes Davis

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: