



WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**

# OIL ANALYSIS REPORT

Area

[PAC7025]

Machine Id

PETERBILT 496404

Component

Diesel Engine

Fluid

CITGO CITGUARD 600 15W40 (48 QTS)

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004228	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	mls	Client Info		180222	---	---
Oil Age	mls	Client Info		11025	---	---
Filter Age	mls	Client Info		11025	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	13	1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	57	61	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	825	437	---	---
Calcium	ppm	ASTM D5185m	1100	1991	---	---
Phosphorus	ppm	ASTM D5185m	933	1122	---	---
Zinc	ppm	ASTM D5185m	1089	1427	---	---
Sulfur	ppm	ASTM D5185m	2769	4012	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	7.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	---	---


FT-IR (Direct Trend)

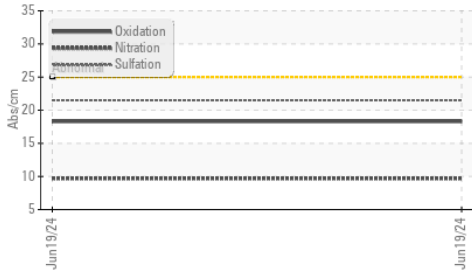


Base Number

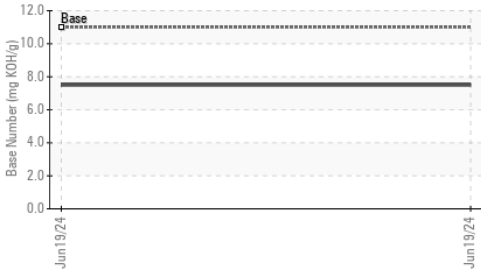


Viscosity @ 100°C

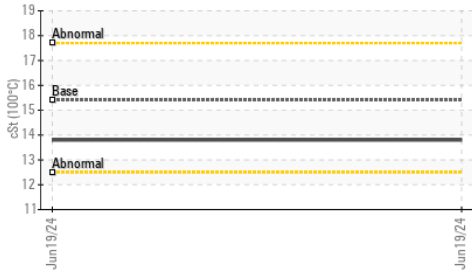


Ferrous Alloys

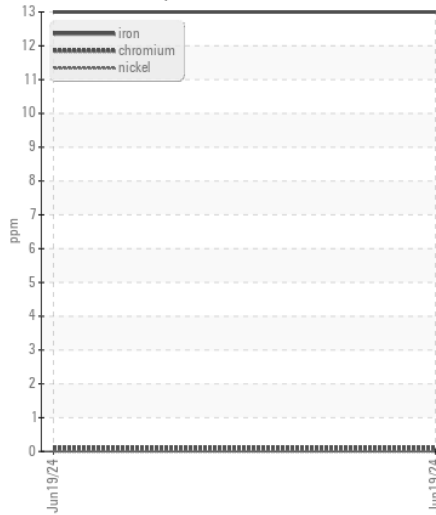


Non-ferrous Metals

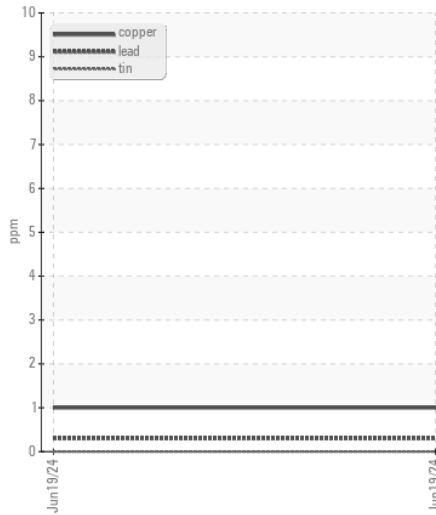

Viscosity @ 100°C

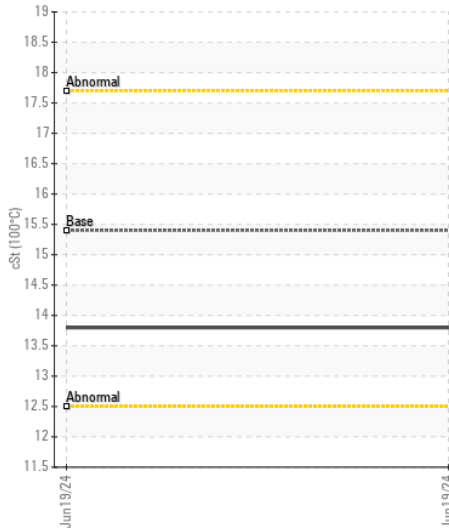

Base Number

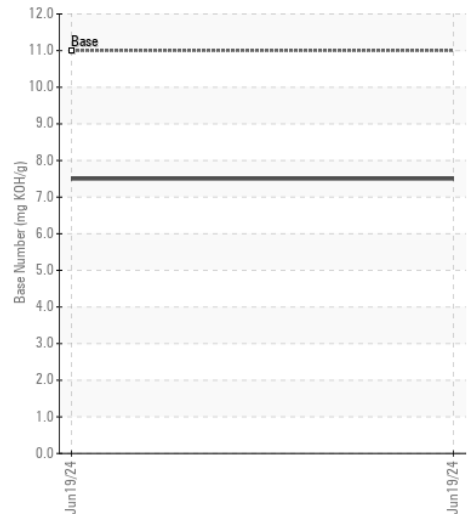

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0004228

Lab Number : 06223375

Unique Number : 11101572

Test Package : FLEET

Received : 28 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Wes Davis

RTL PACLEASE - 7025 - Tampa

8109 East Adamo Drive

Tampa, FL

US 33619

Contact: Michael Reid

REIDM@RushEnterprises.com

T: (813)371-2130

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)