



Area

[PAC7025]

Machine Id

PETERBILT 496403

Component

Diesel Engine

Fluid

CITGO CITGUARD 600 15W40 (48 QTS)

WEAR

NORMAL

CONTAMINATION

NORMAL

FLUID CONDITION

NORMAL

### OIL ANALYSIS REPORT

#### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004227	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	mls	Client Info		163835	---	---
Oil Age	mls	Client Info		21625	---	---
Filter Age	mls	Client Info		21625	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

#### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	22	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		4	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

#### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.9	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

#### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	13	4	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	57	56	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	825	400	---	---
Calcium	ppm	ASTM D5185m	1100	2072	---	---
Phosphorus	ppm	ASTM D5185m	933	1093	---	---
Zinc	ppm	ASTM D5185m	1089	1410	---	---
Sulfur	ppm	ASTM D5185m	2769	3916	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	5.8	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	---	---

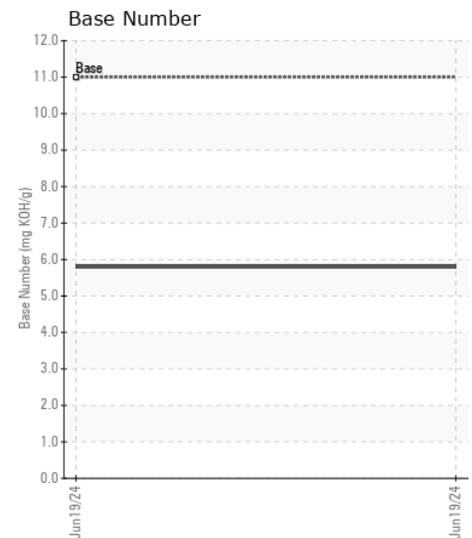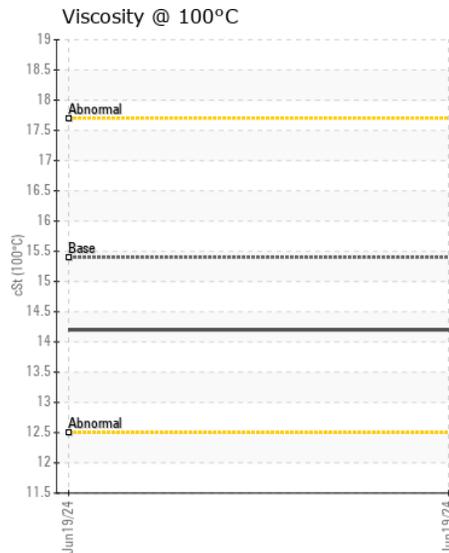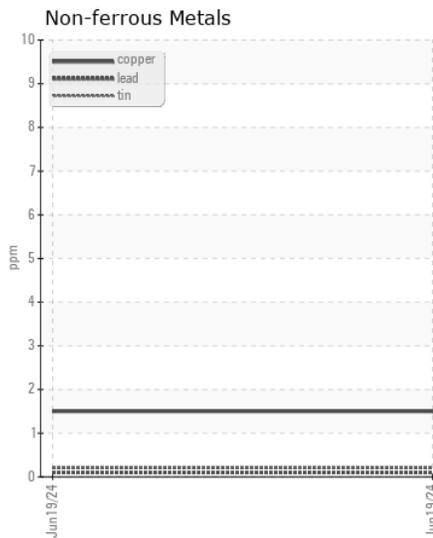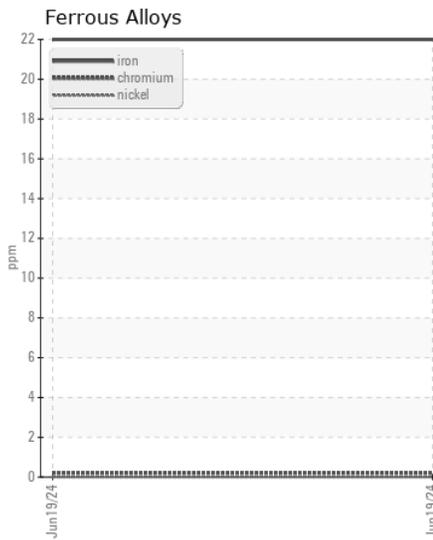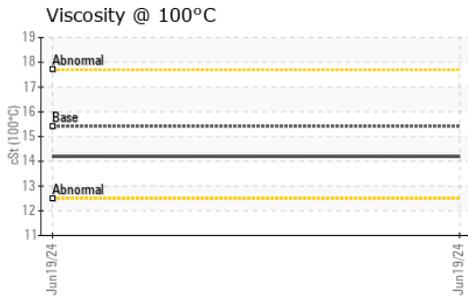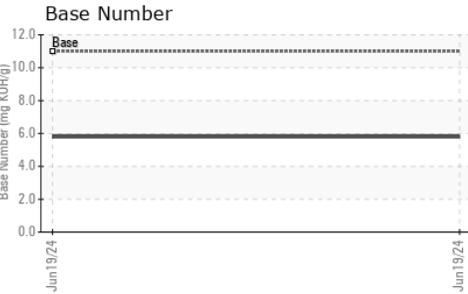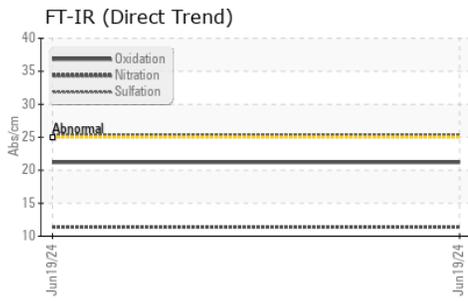

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0004227

**Lab Number** : 06223378

**Unique Number** : 11101575

**Test Package** : FLEET

**Received** : 28 Jun 2024

**Tested** : 01 Jul 2024

**Diagnosed** : 01 Jul 2024 - Wes Davis

**RTL PACLEASE - 7025 - Tampa**

8109 East Adamo Drive

Tampa, FL

US 33619

Contact: Michael Reid

REIDM@RushEnterprises.com

T: (813)371-2130

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)