



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
4018 4018
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947888	---	---
Sample Date		Client Info		26 Jun 2024	---	---
Machine Age	hrs	Client Info		26	---	---
Oil Age	hrs	Client Info		26	---	---
Filter Age	hrs	Client Info		26	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	9	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	1	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	16	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	18	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.7	---	---
Particles >4µm		ASTM D7647	>20000	4280	---	---
Particles >6µm		ASTM D7647	>50000	2332	---	---
Particles >14µm		ASTM D7647	>640	397	---	---
Particles >21µm		ASTM D7647	>160	134	---	---
Particles >38µm		ASTM D7647	>40	21	---	---
Particles >71µm		ASTM D7647	>10	2	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/18/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	---	---
Boron	ppm	ASTM D5185m	250	12	---	---
Barium	ppm	ASTM D5185m	10	6	---	---
Molybdenum	ppm	ASTM D5185m	100	11	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	450	165	---	---
Calcium	ppm	ASTM D5185m	3000	2320	---	---
Phosphorus	ppm	ASTM D5185m	1150	954	---	---
Zinc	ppm	ASTM D5185m	1350	1146	---	---
Sulfur	ppm	ASTM D5185m	4250	4319	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.1	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	---	---

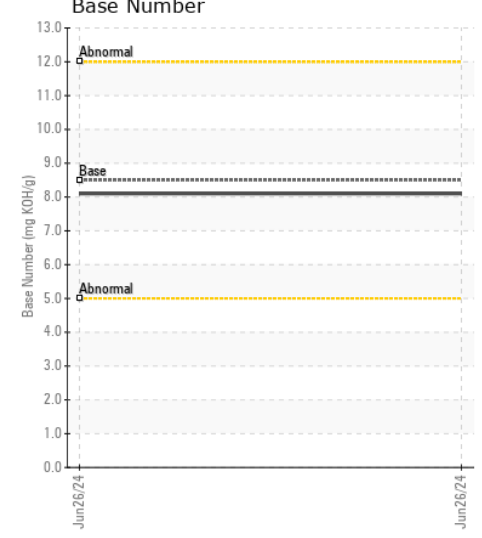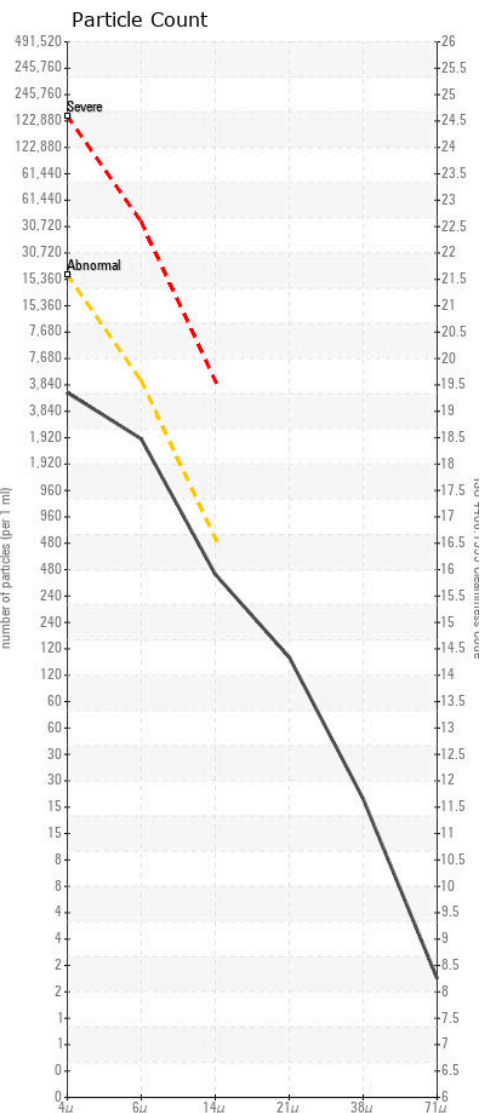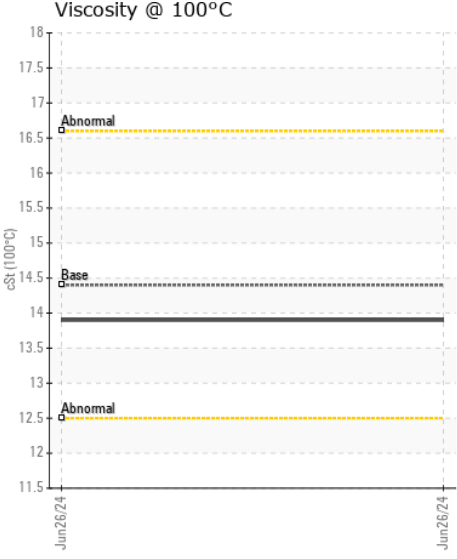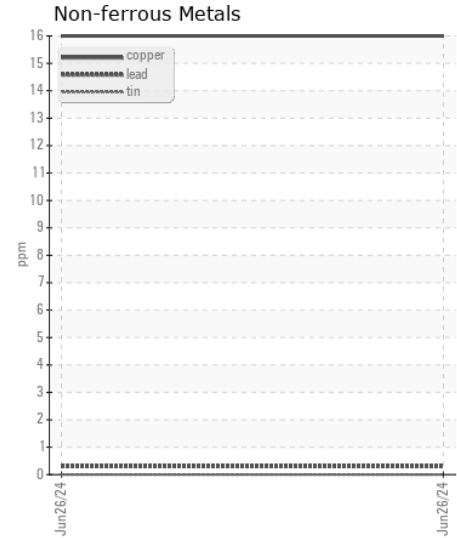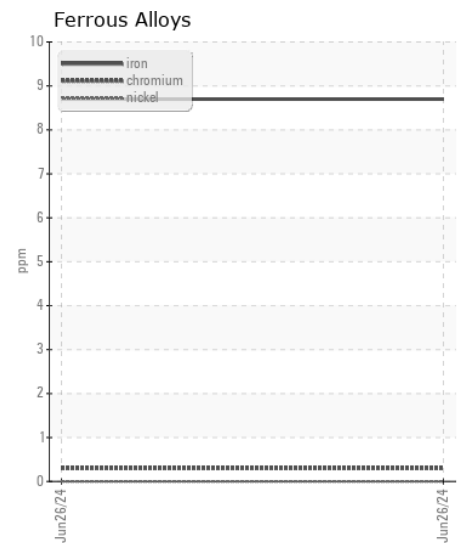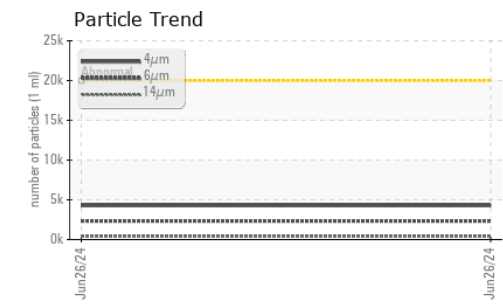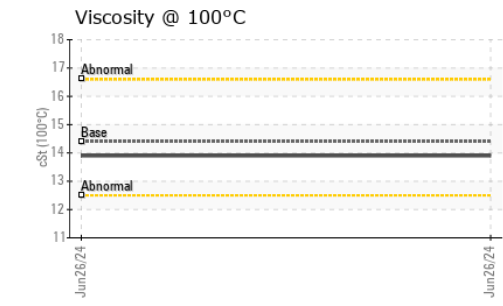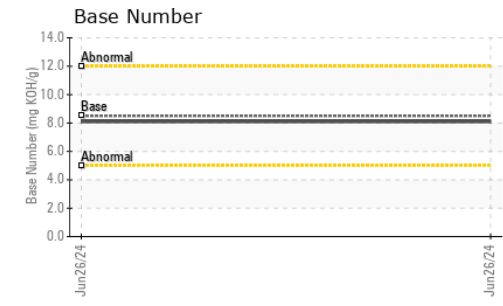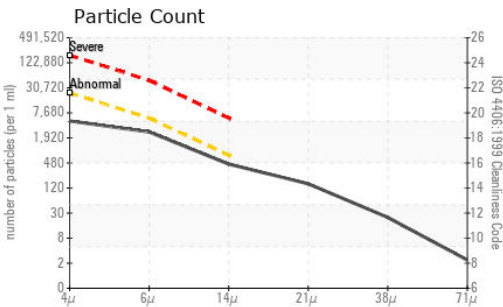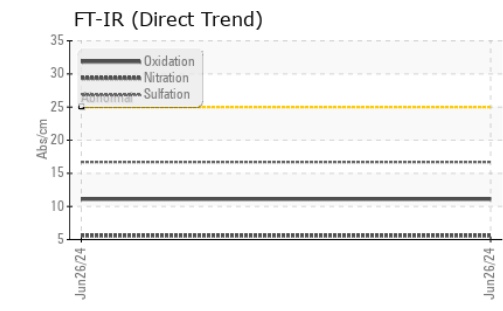

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947888 **Received** : 28 Jun 2024
Lab Number : 06223383 **Tested** : 01 Jul 2024
Unique Number : 11101580 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PRTCOUNT, TBN)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)