



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
4018 4018
 Component
Rear Right Final Drive
 Fluid
SHELL SPIRAX S4 AX 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0956001	---	---
Sample Date		Client Info		26 Jun 2024	---	---
Machine Age	hrs	Client Info		26	---	---
Oil Age	hrs	Client Info		26	---	---
Filter Age	hrs	Client Info		26	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	64	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	4	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>75	4	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water		WC Method	>0.2	NEG	---	---
Particles >4µm		ASTM D7647	>20000	18452	---	---
Particles >6µm		ASTM D7647	>5000	▲ 10052	---	---
Particles >14µm		ASTM D7647	>640	▲ 1711	---	---
Particles >21µm		ASTM D7647	>160	▲ 576	---	---
Particles >38µm		ASTM D7647	>40	▲ 89	---	---
Particles >71µm		ASTM D7647	>10	9	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 21/21/18	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		268	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Calcium	ppm	ASTM D5185m		11	---	---
Phosphorus	ppm	ASTM D5185m		903	---	---
Zinc	ppm	ASTM D5185m		25	---	---
Sulfur	ppm	ASTM D5185m		20040	---	---
Visc @ 40°C	cSt	ASTM D445	139	171	---	---

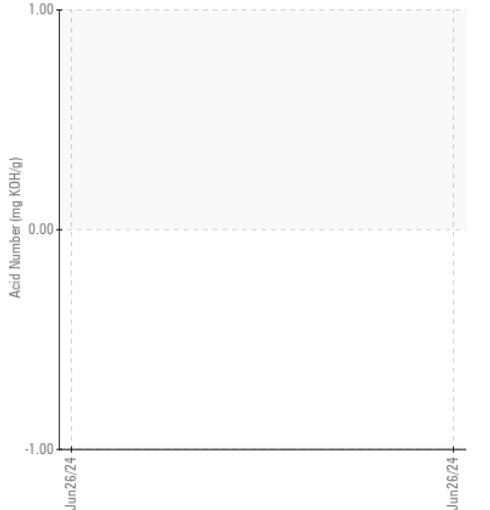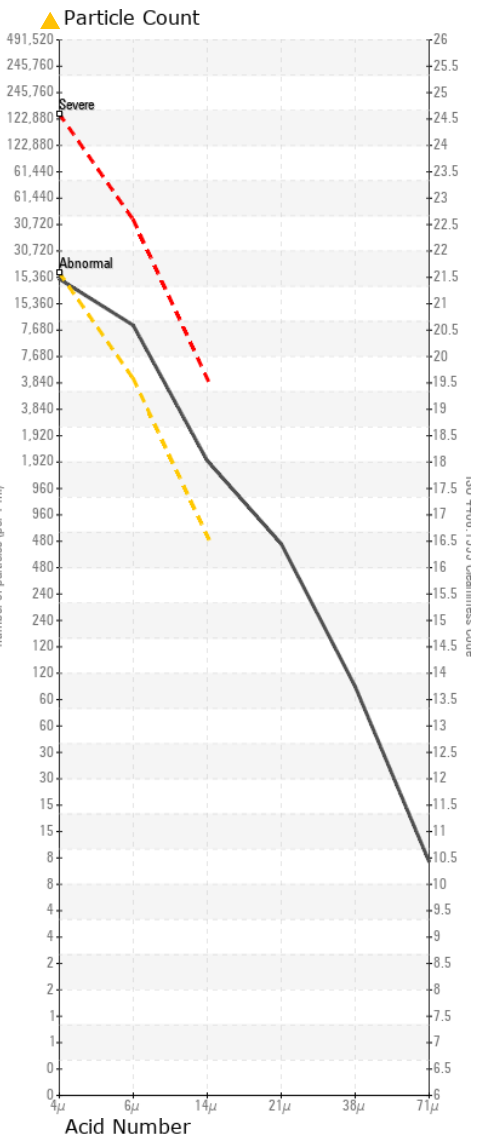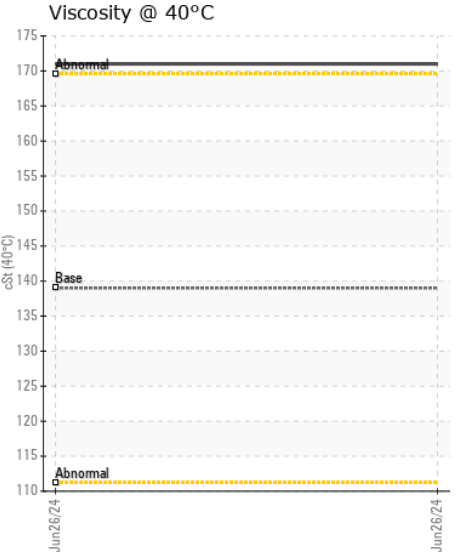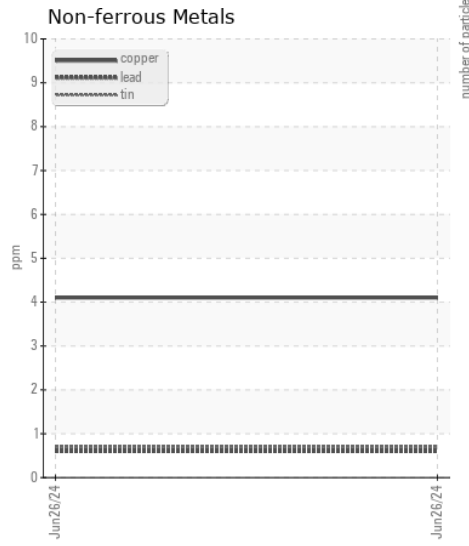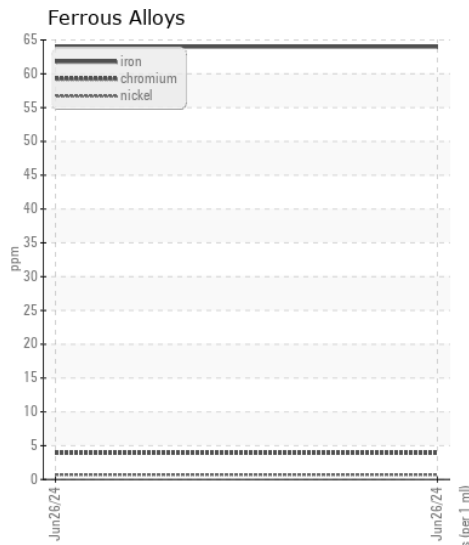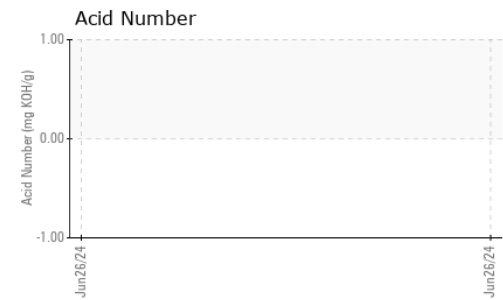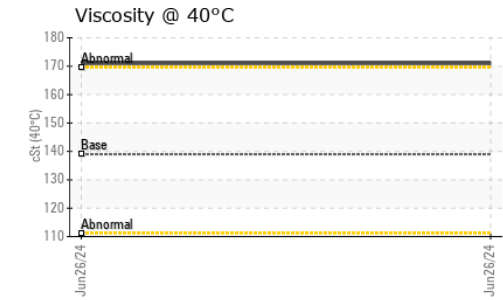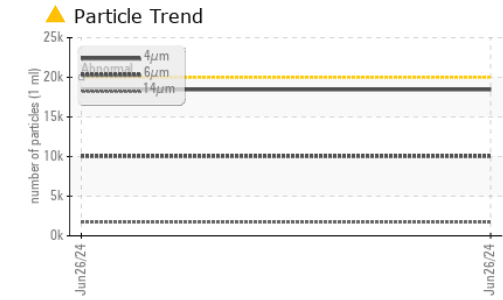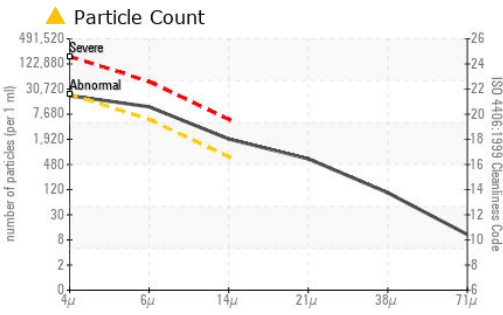

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0956001 **Received** : 28 Jun 2024
Lab Number : 06223386 **Tested** : 01 Jul 2024
Unique Number : 11101583 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com

T: (919)575-4505

F: (919)575-0162