



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
[W00257]
 Machine Id
JOHN DEERE 3032E 67000158 (S/N 1LV3032EKMM138121)
 Component
Hydraulic System
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0209062	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	hrs	Client Info		158	---	---
Oil Age	hrs	Client Info		158	---	---
Filter Age	hrs	Client Info		158	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		26	---	---
Iron	ppm	ASTM D5185m	>20	31	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m	>10	4	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	24	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	10	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 156582	---	---
Particles >6µm		ASTM D7647	>1300	▲ 24501	---	---
Particles >14µm		ASTM D7647	>160	92	---	---
Particles >21µm		ASTM D7647	>40	7	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 24/22/14	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	6	4	---	---
Barium	ppm	ASTM D5185m	0	2	---	---
Molybdenum	ppm	ASTM D5185m	0	1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	145	90	---	---
Calcium	ppm	ASTM D5185m	3570	3405	---	---
Phosphorus	ppm	ASTM D5185m	1290	922	---	---
Zinc	ppm	ASTM D5185m	1640	1250	---	---
Sulfur	ppm	ASTM D5185m		3639	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	1.39	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	32.0	---	---

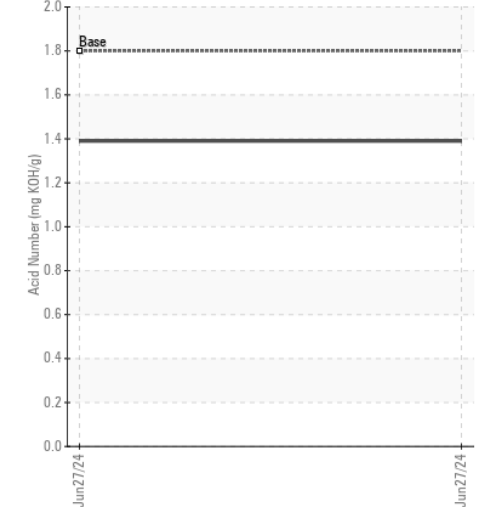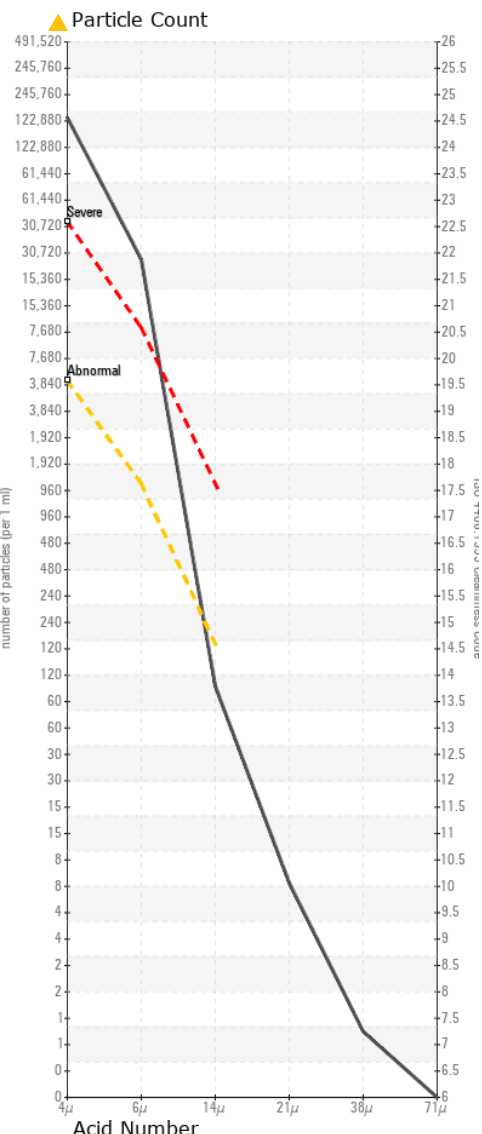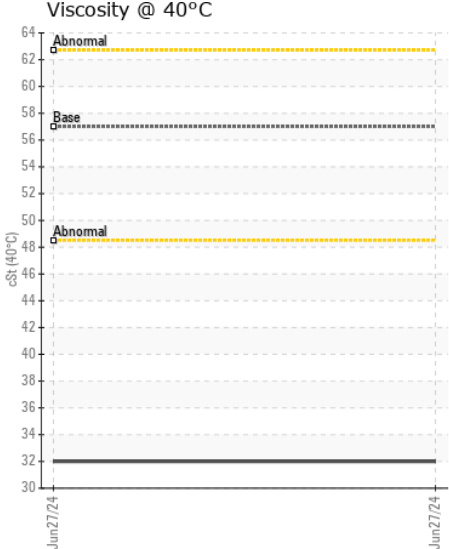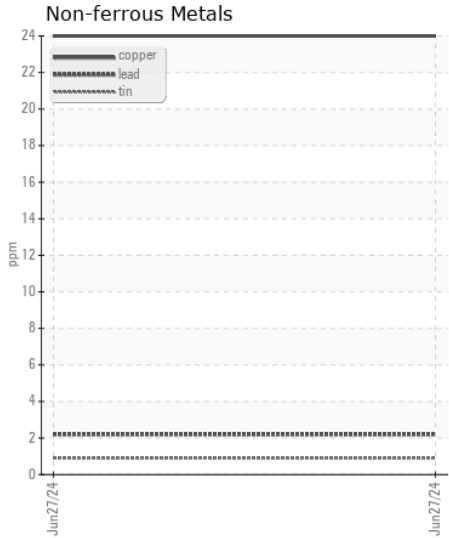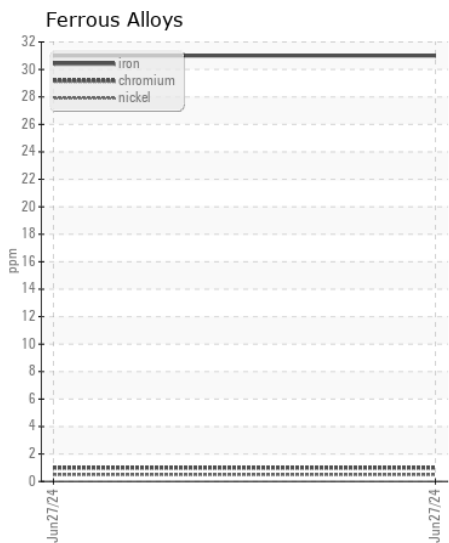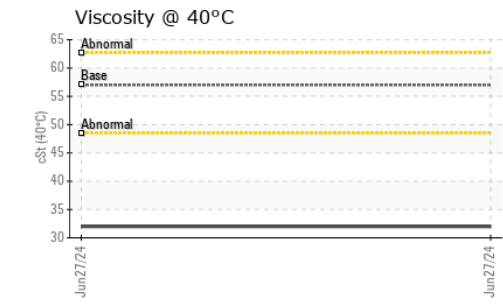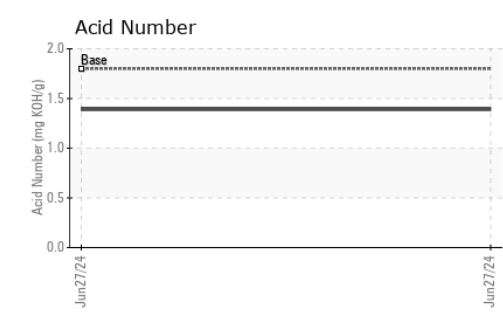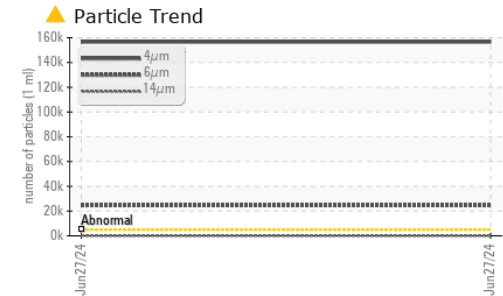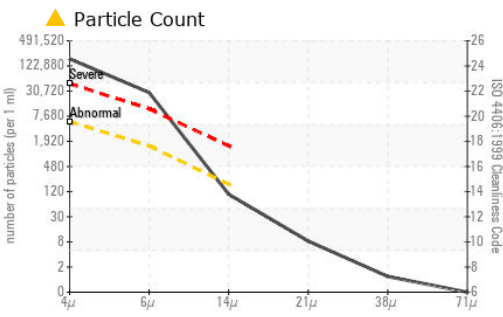

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0209062 **Received** : 28 Jun 2024
Lab Number : 06223433 **Tested** : 01 Jul 2024
Unique Number : 11101630 **Diagnosed** : 01 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - DILLWYN
 284 MAIN ST
 DILLWYN, VA
 US 23936

Certificate L2367 **Contact: MIKE FALVELLA**
 To discuss this sample report, contact Customer Service at 1-800-237-1369. mike.falvella@jamesriverequipment.com
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (434)983-1633
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: