



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
JOHN DEERE 650K 1T0650KKAJF329312
Component
Right Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0222597 | JR0190995 | JR0152631 |
| Sample Date | | Client Info | | 25 Jun 2024 | 11 Dec 2023 | 01 Dec 2022 |
| Machine Age | hrs | Client Info | | 6018 | 5654 | 4602 |
| Oil Age | hrs | Client Info | | 4449 | 5137 | 517 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Not Changd | Not Changd |
| Filter Changed | | Client Info | | N/A | Not Changd | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|------|------|
| PQ | | ASTM D8184 | >1250 | 56 | 29 | 7 |
| Iron | ppm | ASTM D5185m | >750 | 60 | 34 | 3 |
| Chromium | ppm | ASTM D5185m | >9 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >40 | 2 | 1 | 1 |
| Lead | ppm | ASTM D5185m | >15 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >40 | 1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >75 | 9 | 8 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 0 | 0 |
| Water | | WC Method | >0.075 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >51 | 3 | 0 | <1 |
| Boron | ppm | ASTM D5185m | 6 | 2 | 0 | <1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | 2 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 145 | 101 | 102 | 97 |
| Calcium | ppm | ASTM D5185m | 3570 | 3302 | 3216 | 3358 |
| Phosphorus | ppm | ASTM D5185m | 1290 | 1047 | 1043 | 944 |
| Zinc | ppm | ASTM D5185m | 1640 | 1234 | 1248 | 1176 |
| Sulfur | ppm | ASTM D5185m | | 4291 | 3669 | 3953 |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 52.0 | 49.5 | 59.1 |

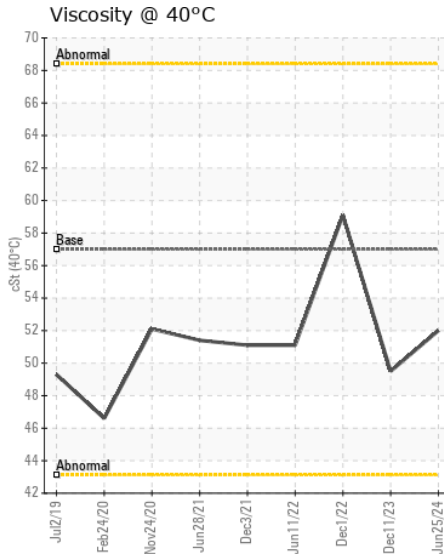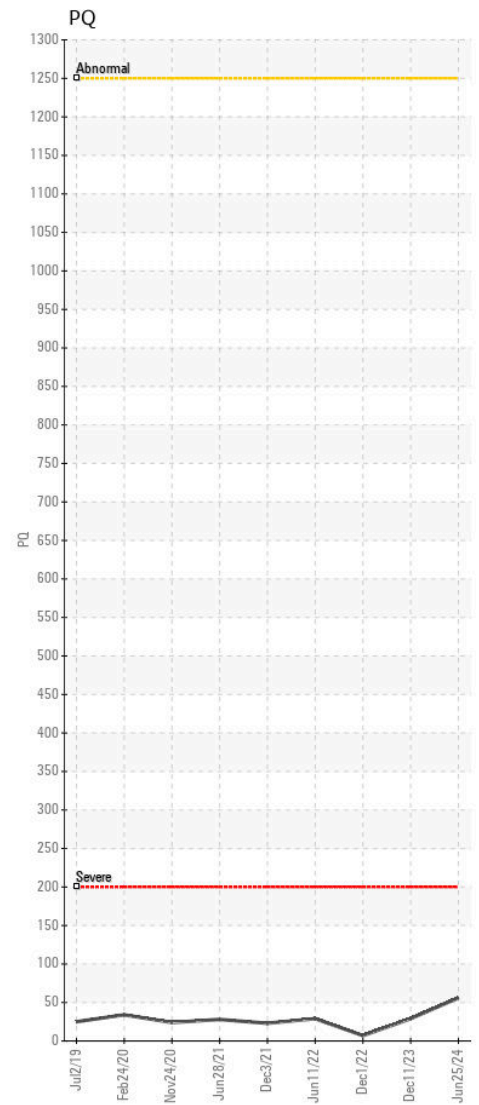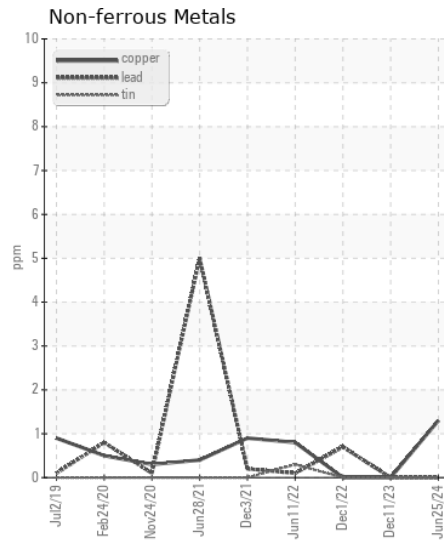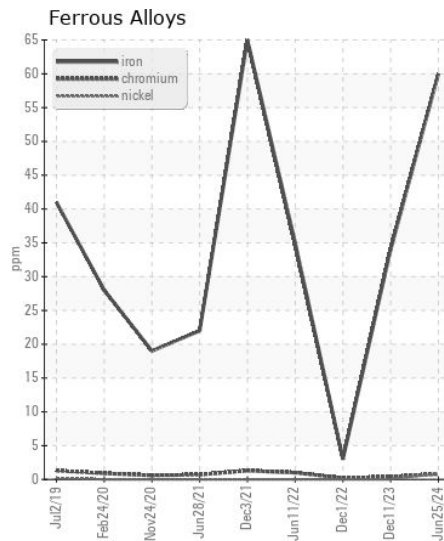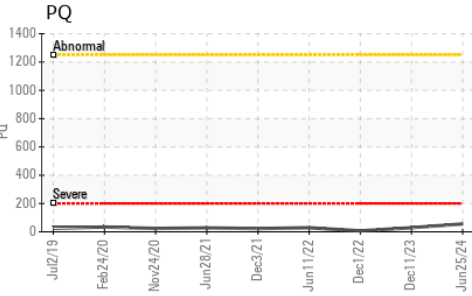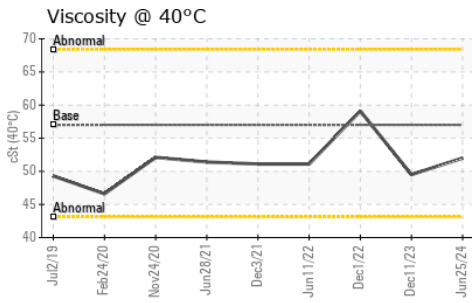

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222597 **Received** : 28 Jun 2024
Lab Number : 06223695 **Tested** : 01 Jul 2024
Unique Number : 11101892 **Diagnosed** : 01 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)