



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 160G 1FF160GXHNF058576**

Component  
**Propel Drive Gearbox**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0222455</b>	JR0186506	---
Sample Date		Client Info		<b>25 Jun 2024</b>	23 Oct 2023	---
Machine Age	hrs	Client Info		<b>979</b>	554	---
Oil Age	hrs	Client Info		<b>979</b>	554	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>13</b>	15	---
Iron	ppm	ASTM D5185m	>200	<b>43</b>	34	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>3</b>	<1	---
Lead	ppm	ASTM D5185m		<b>0</b>	0	---
Copper	ppm	ASTM D5185m		<b>2</b>	<1	---
Tin	ppm	ASTM D5185m		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>13</b>	12	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>6</b>	3	---
Boron	ppm	ASTM D5185m		<b>59</b>	61	---
Barium	ppm	ASTM D5185m		<b>2</b>	3	---
Molybdenum	ppm	ASTM D5185m		<b>104</b>	107	---
Manganese	ppm	ASTM D5185m		<b>3</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>21</b>	17	---
Calcium	ppm	ASTM D5185m		<b>4236</b>	3881	---
Phosphorus	ppm	ASTM D5185m		<b>1238</b>	1172	---
Zinc	ppm	ASTM D5185m		<b>1377</b>	1296	---
Sulfur	ppm	ASTM D5185m		<b>10061</b>	7960	---
Visc @ 40°C	cSt	ASTM D445		<b>66.7</b>	64.0	---

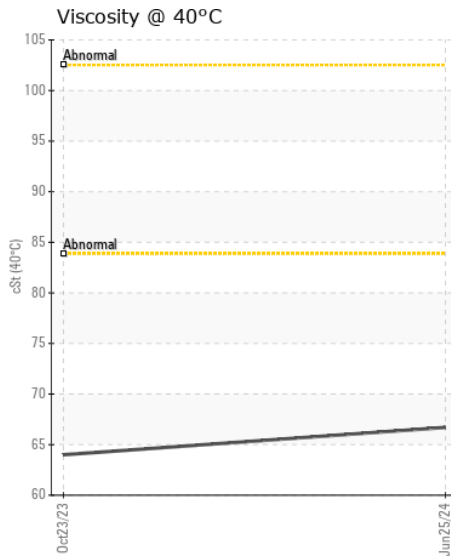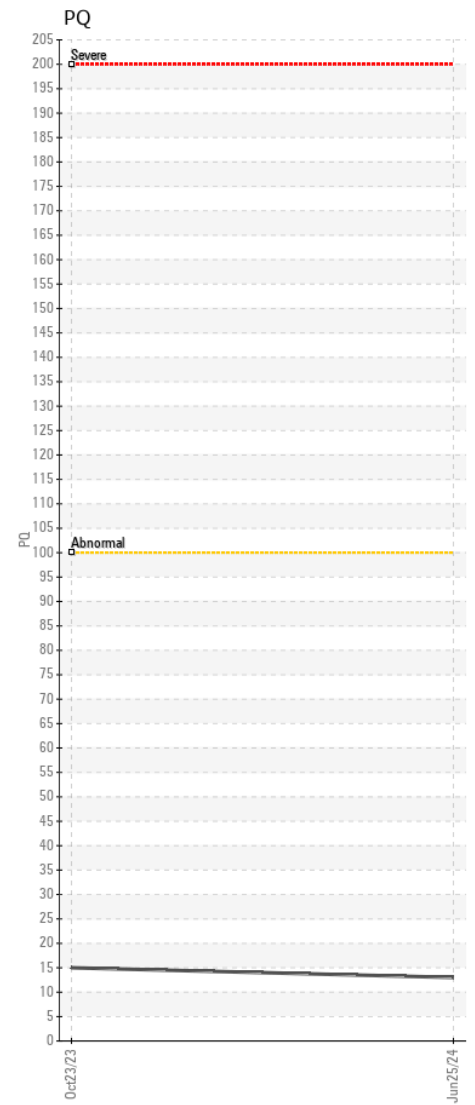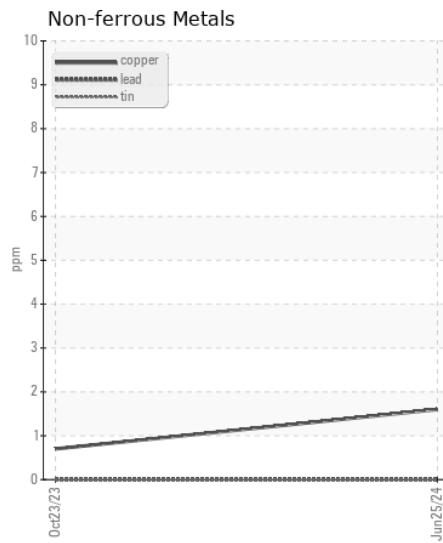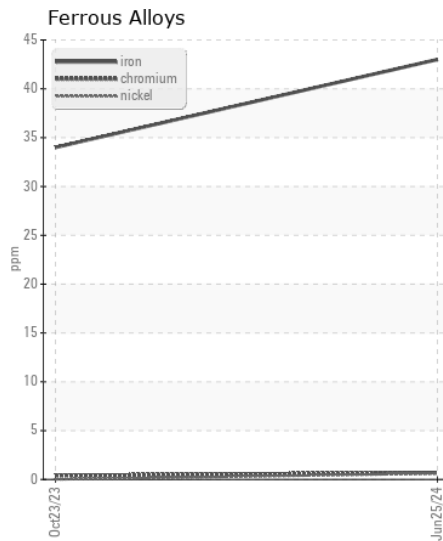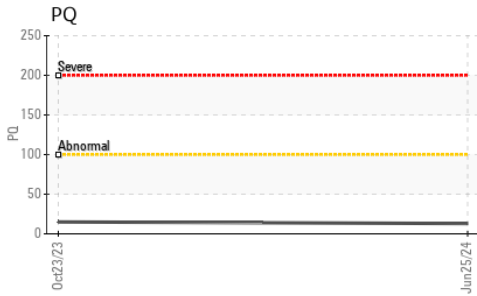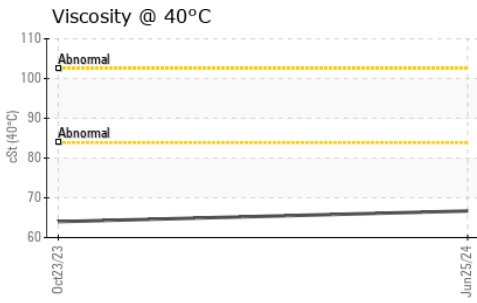

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0222455

**Lab Number** : 06223696

**Unique Number** : 11101893

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 28 Jun 2024

**Tested** : 01 Jul 2024

**Diagnosed** : 01 Jul 2024 - Don Baldridge

**JRE - GARNER**

4161 AUBURN CHURCH RD

GARNER, NC

US 27529

Contact: RALEIGH SHOP

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260

F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)