



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W68302]
 Machine Id
ATLAS COPCO D60 G19SED0249
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W68302)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0219694	JR0171510	---
Sample Date		Client Info		27 Jun 2024	12 Jun 2023	---
Machine Age	hrs	Client Info		9048	1725	---
Oil Age	hrs	Client Info		7323	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		30	52	---
Iron	ppm	ASTM D5185m	>500	51	69	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	14	---
Lead	ppm	ASTM D5185m	>25	4	12	---
Copper	ppm	ASTM D5185m	>50	9	9	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	28	---
Potassium	ppm	ASTM D5185m	>20	4	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m		18	158	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	3	---
Manganese	ppm	ASTM D5185m		1	1	---
Magnesium	ppm	ASTM D5185m		1	11	---
Calcium	ppm	ASTM D5185m		8	22	---
Phosphorus	ppm	ASTM D5185m		400	909	---
Zinc	ppm	ASTM D5185m		0	22	---
Sulfur	ppm	ASTM D5185m		22580	23285	---
Visc @ 40°C	cSt	ASTM D445		136	140	---

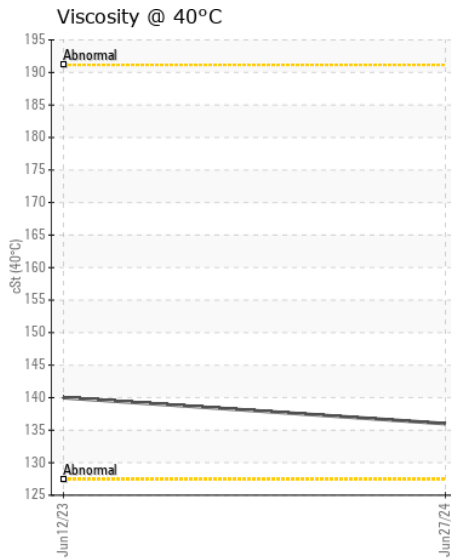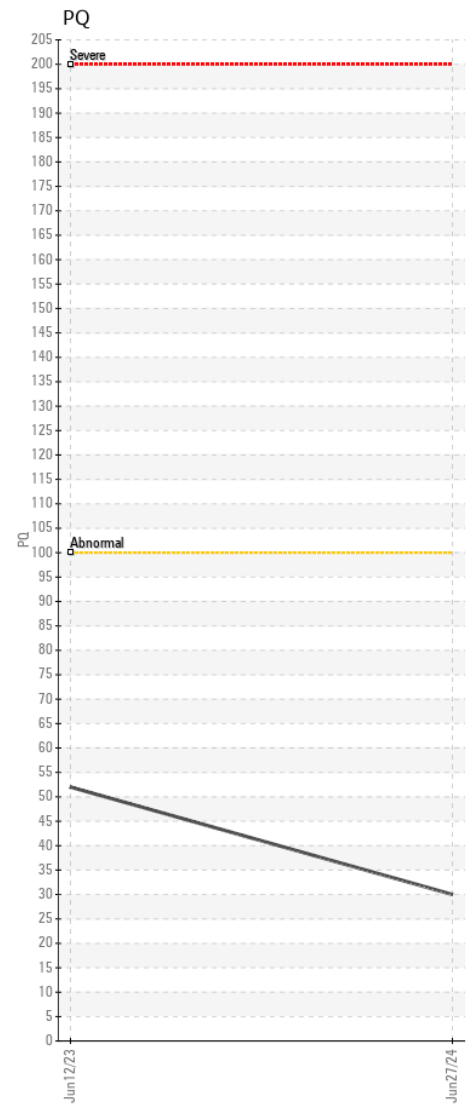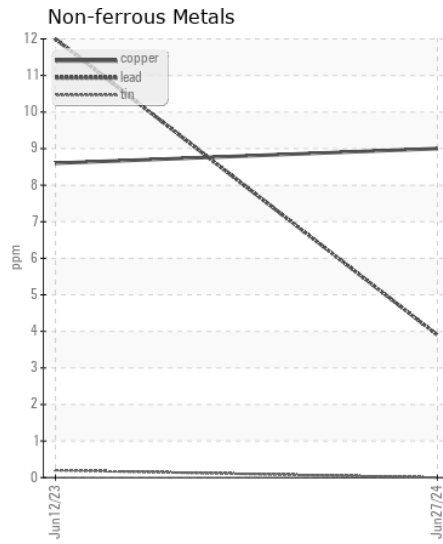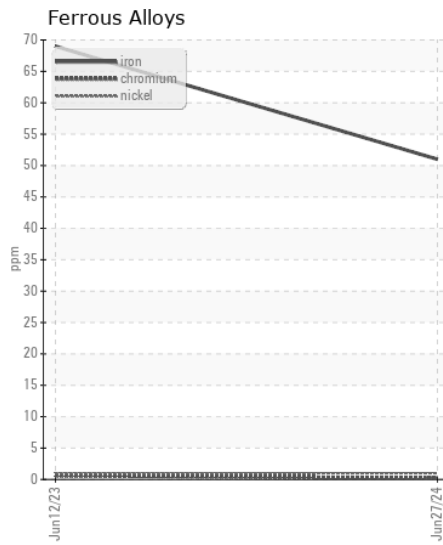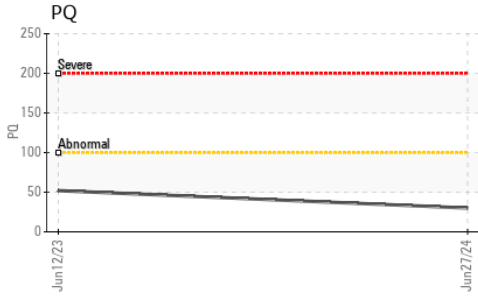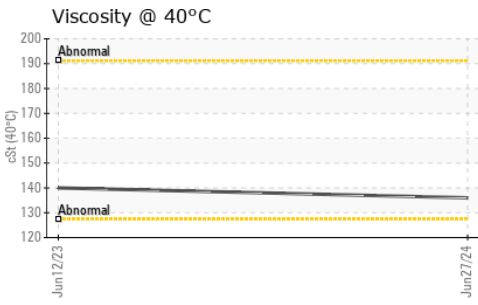

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0219694 **Received** : 28 Jun 2024
Lab Number : 06223700 **Tested** : 01 Jul 2024
Unique Number : 11101897 **Diagnosed** : 01 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: James Ball
 JBall@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)596-6198