



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 152448]
Machine Id
JOHN DEERE 210G 1FF210GXJNF530285
Component
Right Propel Gearbox
Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048316	LEC0043865	LEC0037166
Sample Date		Client Info		24 Jun 2024	17 Oct 2023	03 Jan 2023
Machine Age	hrs	Client Info		1103	735	283
Oil Age	hrs	Client Info		368	452	283
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	None	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		207	365	247
Iron	ppm	ASTM D5185m	>1250	361	596	191
Chromium	ppm	ASTM D5185m	>10	5	8	5
Nickel	ppm	ASTM D5185m	>10	1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m		4	5	2
Lead	ppm	ASTM D5185m		0	0	<1
Copper	ppm	ASTM D5185m		2	2	1
Tin	ppm	ASTM D5185m		0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		25	32	14
Potassium	ppm	ASTM D5185m	>20	4	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	1	0
Boron	ppm	ASTM D5185m	6	18	44	75
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	0	<1
Manganese	ppm	ASTM D5185m		5	8	4
Magnesium	ppm	ASTM D5185m	145	108	27	<1
Calcium	ppm	ASTM D5185m	3570	3076	2147	14
Phosphorus	ppm	ASTM D5185m	1290	1005	822	499
Zinc	ppm	ASTM D5185m	1640	1139	770	6
Sulfur	ppm	ASTM D5185m		5686	8185	18638
Visc @ 40°C	cSt	ASTM D445	57.0	62.8	84.8	186

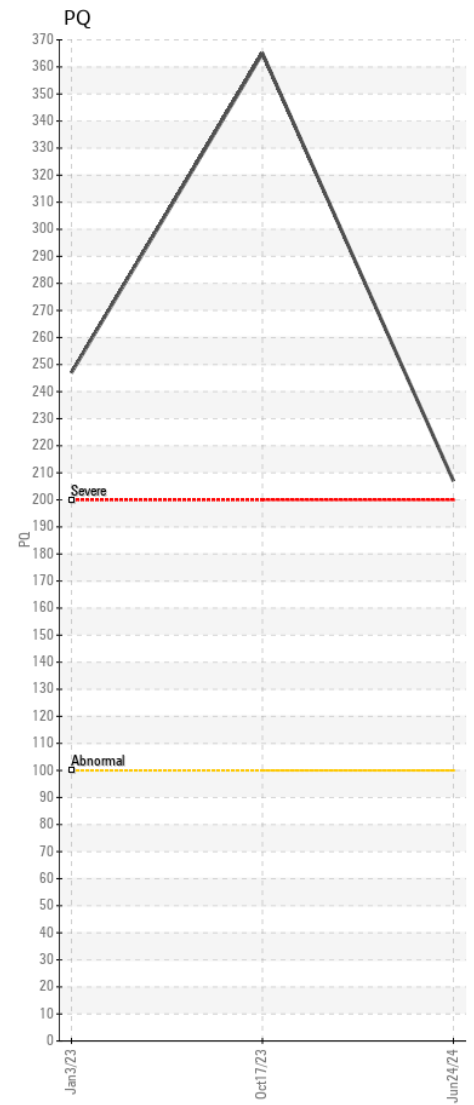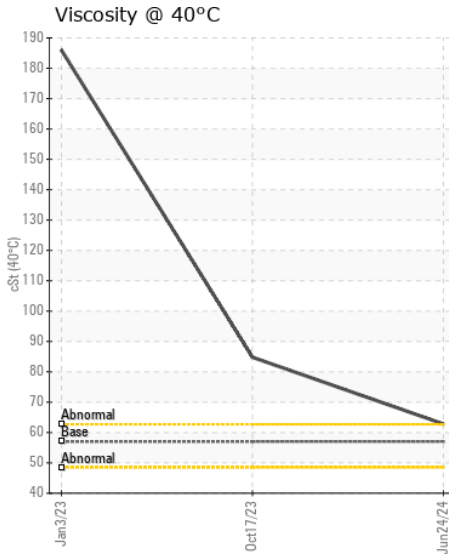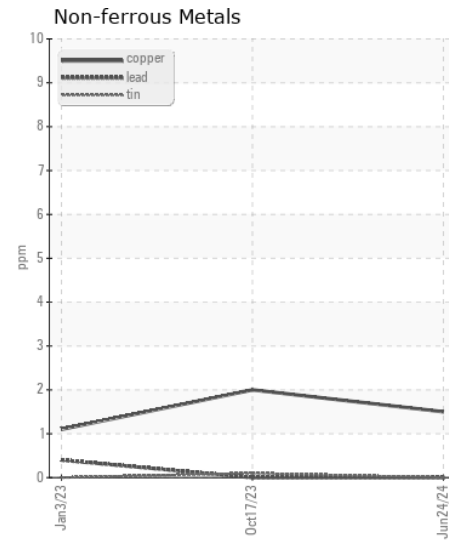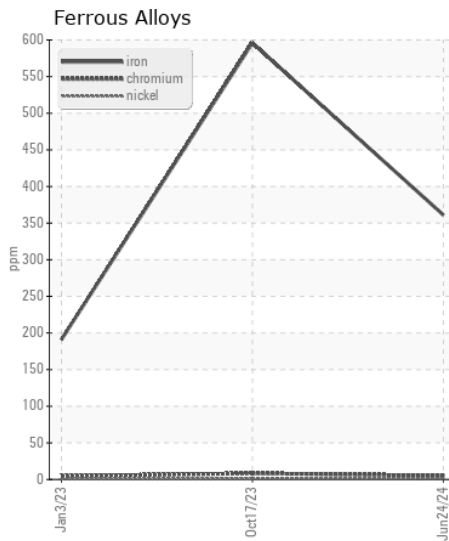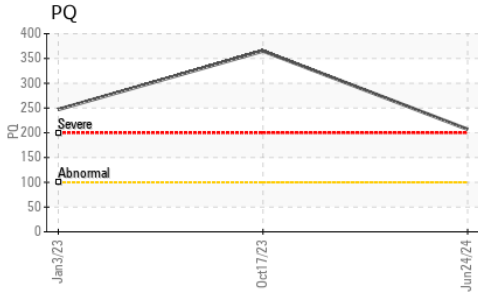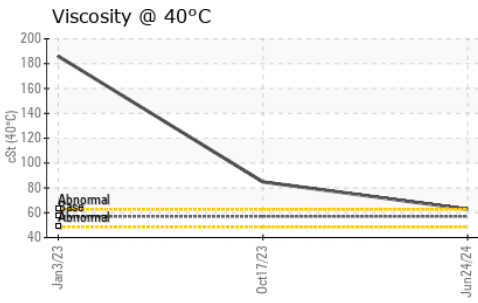

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048316 **Received** : 28 Jun 2024
Lab Number : 06223736 **Tested** : 01 Jul 2024
Unique Number : 11101933 **Diagnosed** : 01 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570