



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
Store 9 - Marietta
Machine Id
HAMM WGH0H252KHAA00503
Component
Left Wheel Hub
Fluid
WIRTGEN GROUP GEAR OIL 85W90 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | LEC0050869 | --- | --- |
| Sample Date | | Client Info | | 24 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 56 | --- | --- |
| Oil Age | hrs | Client Info | | 56 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Not Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| PQ | | ASTM D8184 | | 77 | --- | --- |
| Iron | ppm | ASTM D5185m | >500 | 122 | --- | --- |
| Chromium | ppm | ASTM D5185m | >8 | 4 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Lead | ppm | ASTM D5185m | >5 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m | | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|--------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 4 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|--|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 6 | --- | --- |
| Boron | ppm | ASTM D5185m | | <1 | --- | --- |
| Barium | ppm | ASTM D5185m | | 2 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 16 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 3 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 29 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 641 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 6 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 35791 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 147 | --- | --- |


Viscosity @ 40°C

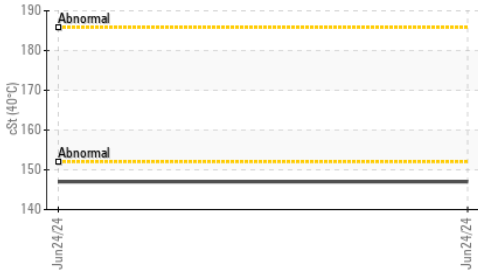


PQ

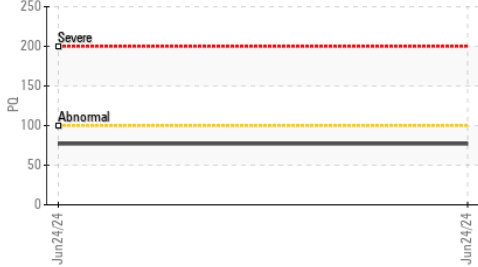


Ferrous Alloys

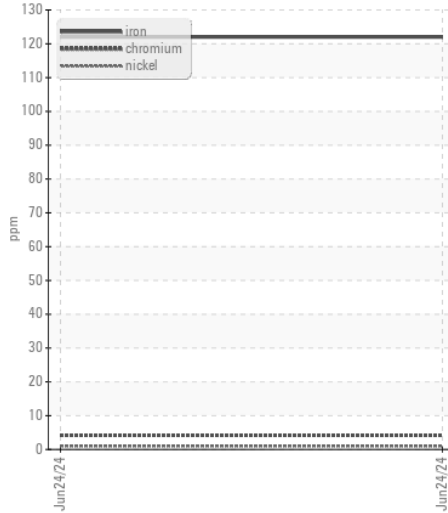


Non-ferrous Metals

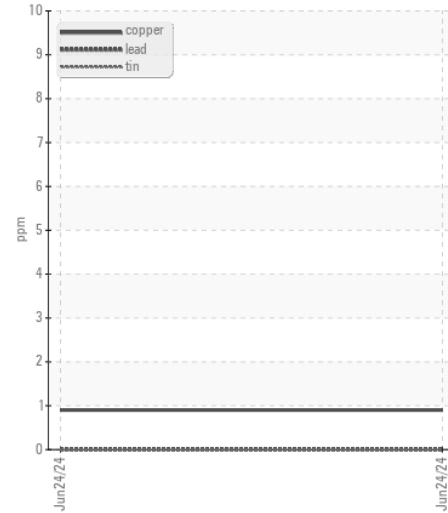

PQ

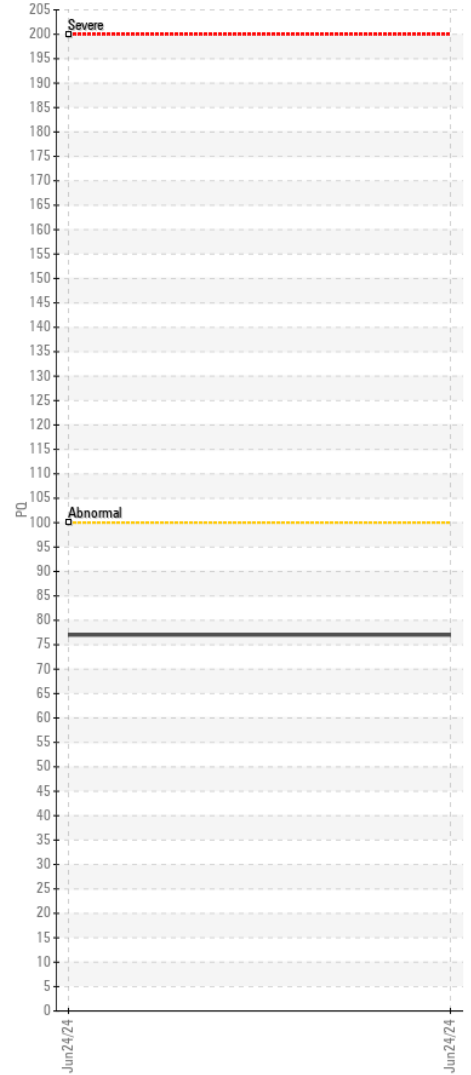

Viscosity @ 40°C

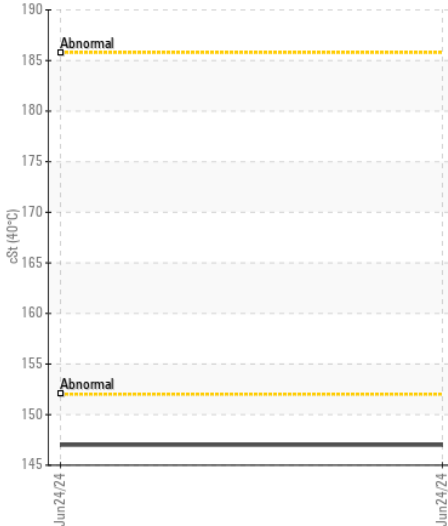

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LEC0050869 Received : 28 Jun 2024
 Lab Number : 06223742 Tested : 01 Jul 2024
 Unique Number : 11101939 Diagnosed : 01 Jul 2024 - Wes Davis
 Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570