



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI HCMDAT60E00200673
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225493	JR0199312	---
Sample Date		Client Info		27 Jun 2024	20 Dec 2023	---
Machine Age	hrs	Client Info		1249	826	---
Oil Age	hrs	Client Info		0	826	---
Filter Age	hrs	Client Info		0	826	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		80	80	---
Iron	ppm	ASTM D5185m	>500	72	66	---
Chromium	ppm	ASTM D5185m	>10	2	2	---
Nickel	ppm	ASTM D5185m	>10	1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	3	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	2	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	28	25	---
Potassium	ppm	ASTM D5185m	>20	9	5	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	0	---
Boron	ppm	ASTM D5185m		55	65	---
Barium	ppm	ASTM D5185m		6	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		3	2	---
Magnesium	ppm	ASTM D5185m		1	1	---
Calcium	ppm	ASTM D5185m		52	14	---
Phosphorus	ppm	ASTM D5185m		523	551	---
Zinc	ppm	ASTM D5185m		58	32	---
Sulfur	ppm	ASTM D5185m		19023	17449	---
Visc @ 40°C	cSt	ASTM D445		186	186	---

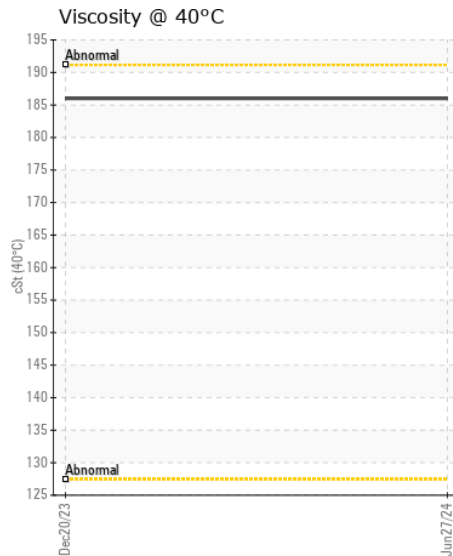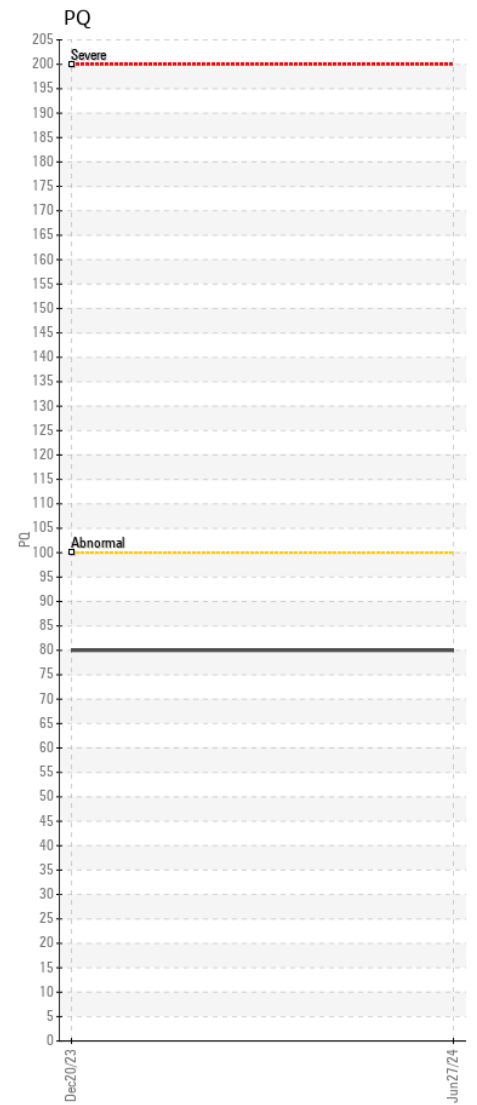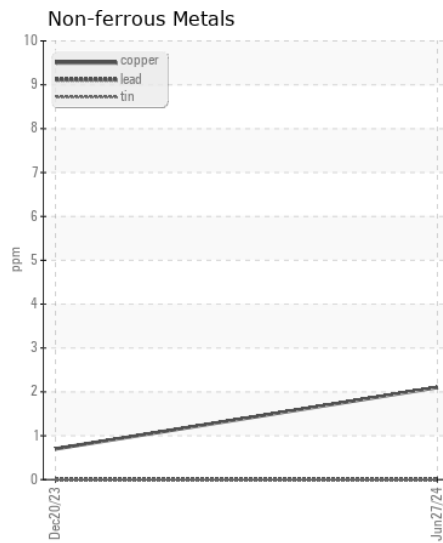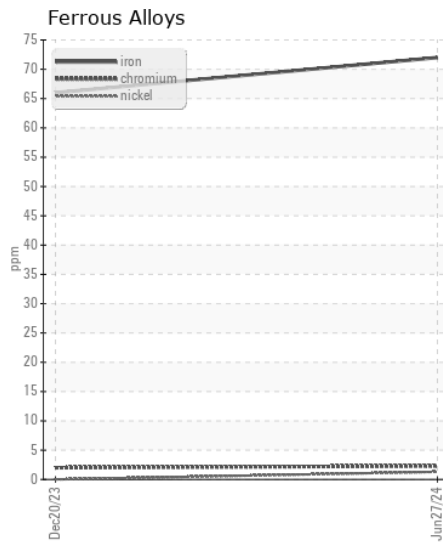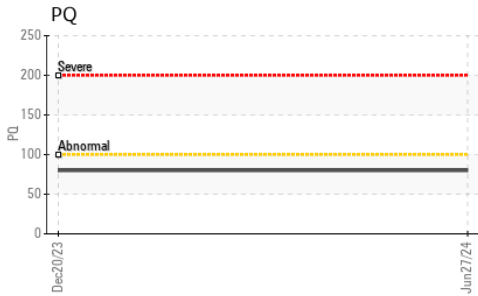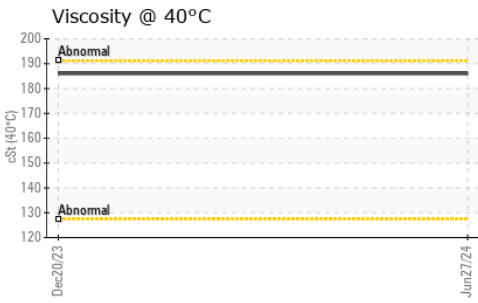

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225493 **Received** : 28 Jun 2024
Lab Number : 06223750 **Tested** : 01 Jul 2024
Unique Number : 11101947 **Diagnosed** : 01 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)