



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 948LII 718635
 Component
Rear Differential
 Fluid
TDH FLUID SAE 75W80 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0177108	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	hrs	Client Info		684	---	---
Oil Age	hrs	Client Info		684	---	---
Filter Age	hrs	Client Info		684	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		76	---	---
Iron	ppm	ASTM D5185m	>500	23	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	10	5	---	---
Barium	ppm	ASTM D5185m	10	3	---	---
Molybdenum	ppm	ASTM D5185m	10	0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	100	109	---	---
Calcium	ppm	ASTM D5185m	3500	3621	---	---
Phosphorus	ppm	ASTM D5185m	1150	1094	---	---
Zinc	ppm	ASTM D5185m	1150	1315	---	---
Sulfur	ppm	ASTM D5185m	5000	4527	---	---
Visc @ 40°C	cSt	ASTM D445	48	53.9	---	---

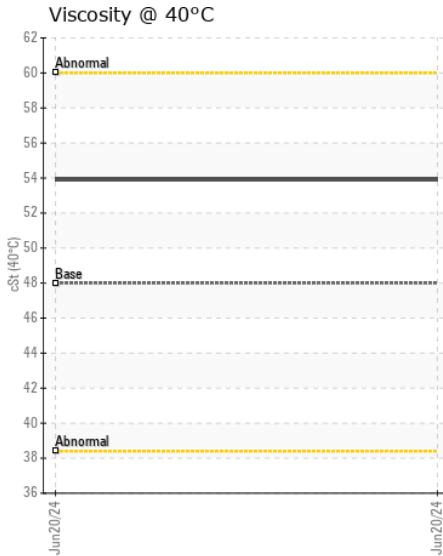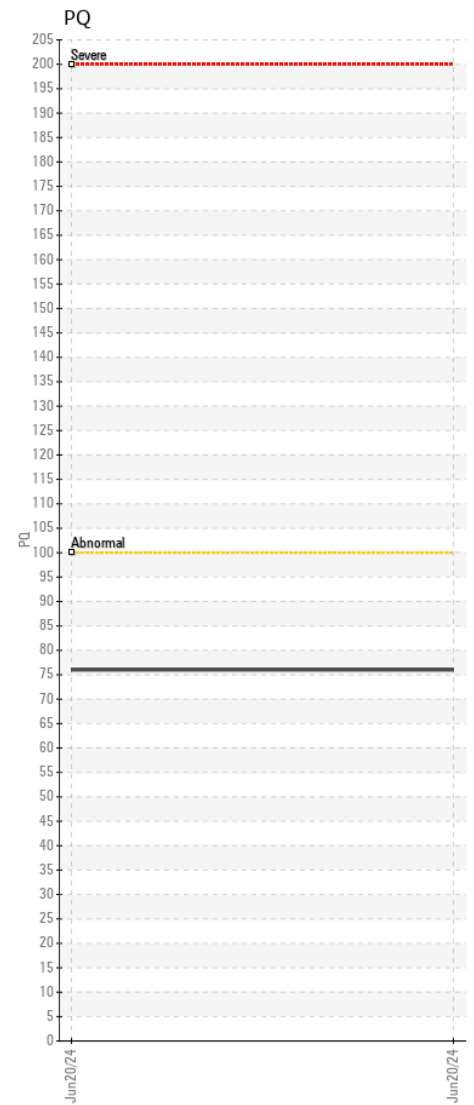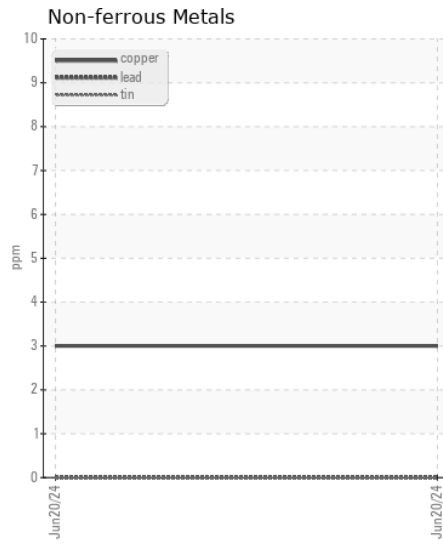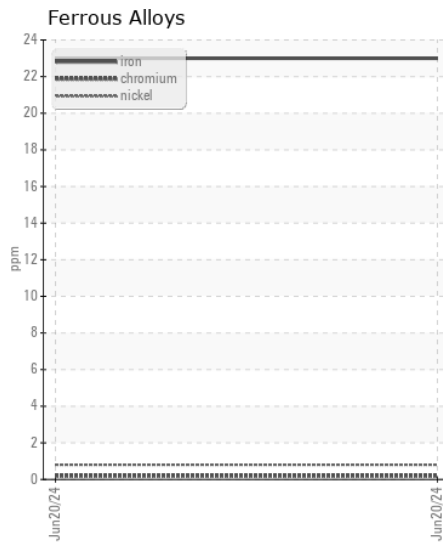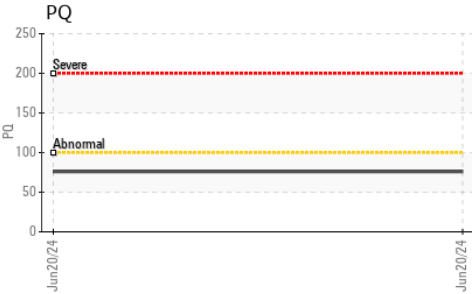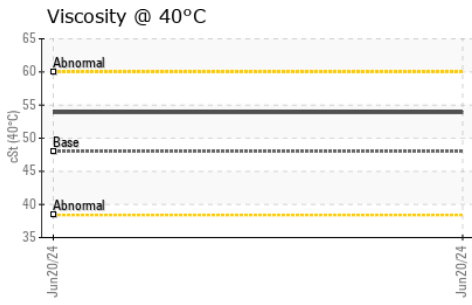

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0177108

Lab Number : 06223751

Unique Number : 11101948

Test Package : CONST (Additional Tests: PQ)

Received : 28 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MOUNT GILEAD

305 NORTH MAIN STREET

MOUNT GILEAD, NC

US 27306

Contact: TIM ELSWORTH

telsworth@jamesriverequipment.com

T: (910)439-5653

F: (910)439-4568