



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAHPF000543
 Component
Swing Drive Gear Case
 Fluid
JOHN DEERE GL-5 80W90 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225743	JR0211327	JR0195906
Sample Date		Client Info		26 Jun 2024	27 Mar 2024	06 Dec 2023
Machine Age	hrs	Client Info		1992	1467	963
Oil Age	hrs	Client Info		1992	503	963
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	N/A
Filter Changed		Client Info		None	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		29	35	225
Iron	ppm	ASTM D5185m	>200	49	36	107
Chromium	ppm	ASTM D5185m	>10	<1	0	2
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		<1	0	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m		<1	0	<1
Tin	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		7	3	13
Potassium	ppm	ASTM D5185m	>20	4	1	11
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	4
Boron	ppm	ASTM D5185m		21	21	74
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		2	0	2
Magnesium	ppm	ASTM D5185m		2	0	0
Calcium	ppm	ASTM D5185m		51	112	17
Phosphorus	ppm	ASTM D5185m		380	391	536
Zinc	ppm	ASTM D5185m		8	24	9
Sulfur	ppm	ASTM D5185m		22165	20947	15609
Visc @ 40°C	cSt	ASTM D445		144	147	186

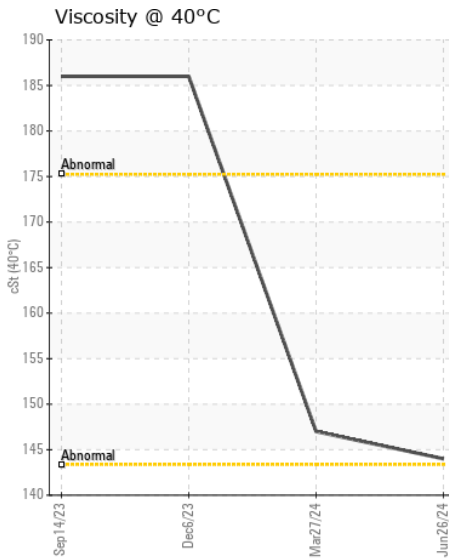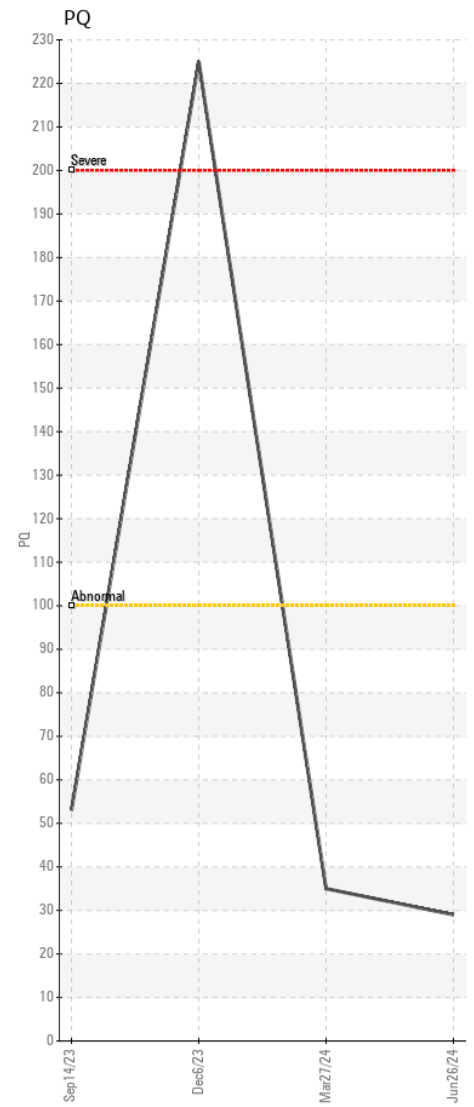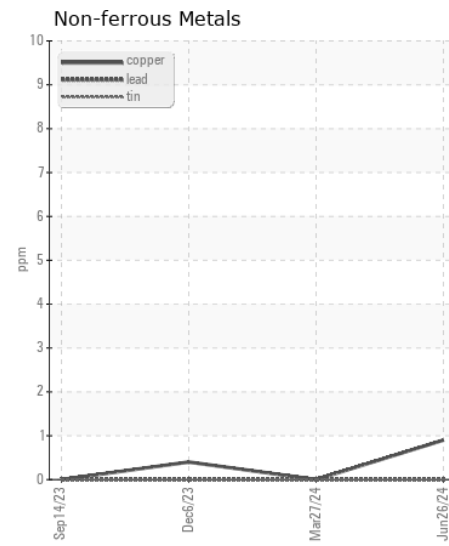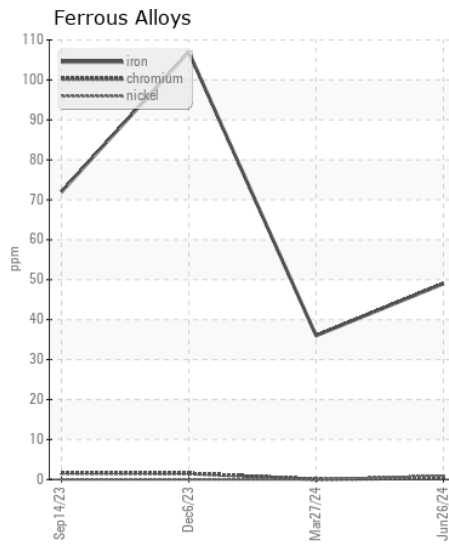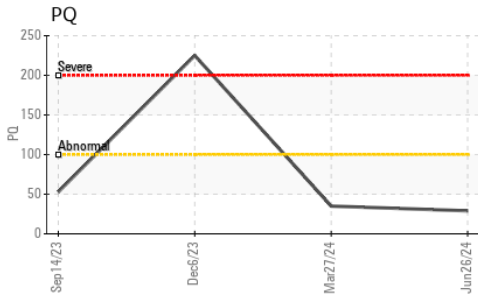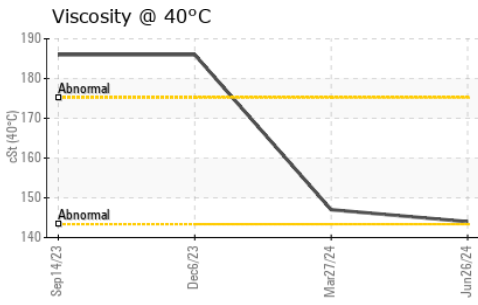

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0225743

Lab Number : 06223758

Unique Number : 11101955

Test Package : CONST (Additional Tests: PQ)

Received : 28 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Don Baldrige

B & S SITE DEVELOPMENT

7800 PINEY BRANCH LANE

BRISTOW, VA

US 20136

Contact: DANNY HUFF

dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)