



# VOLVO

## OIL ANALYSIS REPORT

|                 |        |
|-----------------|--------|
| WEAR            | NORMAL |
| CONTAMINATION   | NORMAL |
| FLUID CONDITION | NORMAL |



Area

**[730372 RENTALS]**

Machine Id

**VOLVO A40G 752207**

Component

**Wet Disc Brake**

Fluid

**VOLVO WET BRAKE TRANSAXLE OIL (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current     | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number  |     | Client Info |           | VCP443042   | ---      | ---      |
| Sample Date    |     | Client Info |           | 24 Jun 2024 | ---      | ---      |
| Machine Age    | hrs | Client Info |           | 1196        | ---      | ---      |
| Oil Age        | hrs | Client Info |           | 0           | ---      | ---      |
| Filter Age     | hrs | Client Info |           | 0           | ---      | ---      |
| Oil Changed    |     | Client Info |           | Changed     | ---      | ---      |
| Filter Changed |     | Client Info |           | Not Changed | ---      | ---      |
| Sample Status  |     |             |           | NORMAL      | ---      | ---      |

### WEAR

All component wear rates are normal.

|              |        |             |      |      |     |     |
|--------------|--------|-------------|------|------|-----|-----|
| Iron         | ppm    | ASTM D5185m | >20  | 12   | --- | --- |
| Chromium     | ppm    | ASTM D5185m | >10  | <1   | --- | --- |
| Nickel       | ppm    | ASTM D5185m | >10  | 3    | --- | --- |
| Titanium     | ppm    | ASTM D5185m |      | <1   | --- | --- |
| Silver       | ppm    | ASTM D5185m |      | 0    | --- | --- |
| Aluminum     | ppm    | ASTM D5185m | >10  | 0    | --- | --- |
| Lead         | ppm    | ASTM D5185m | >10  | <1   | --- | --- |
| Copper       | ppm    | ASTM D5185m | >75  | 54   | --- | --- |
| Tin          | ppm    | ASTM D5185m | >10  | 0    | --- | --- |
| Vanadium     | ppm    | ASTM D5185m |      | <1   | --- | --- |
| White Metal  | scalar | *Visual     | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual     | NONE | NONE | --- | --- |

### CONTAMINATION










There is no indication of any contamination in the oil.

|                  |        |             |       |       |     |     |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon          | ppm    | ASTM D5185m | >20   | 10    | --- | --- |
| Potassium        | ppm    | ASTM D5185m | >20   | 2     | --- | --- |
| Water            |        | WC Method   | >0.1  | NEG   | --- | --- |
| Silt             | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Debris           | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Sand/Dirt        | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Appearance       | scalar | *Visual     | NORML | NORML | --- | --- |
| Odor             | scalar | *Visual     | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual     | >0.1  | NEG   | --- | --- |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |             |      |      |     |     |
|-------------|-----|-------------|------|------|-----|-----|
| Sodium      | ppm | ASTM D5185m |      | 5    | --- | --- |
| Boron       | ppm | ASTM D5185m | 100  | 105  | --- | --- |
| Barium      | ppm | ASTM D5185m | 0    | 0    | --- | --- |
| Molybdenum  | ppm | ASTM D5185m | 0    | <1   | --- | --- |
| Manganese   | ppm | ASTM D5185m |      | <1   | --- | --- |
| Magnesium   | ppm | ASTM D5185m | 0    | 8    | --- | --- |
| Calcium     | ppm | ASTM D5185m | 3800 | 3527 | --- | --- |
| Phosphorus  | ppm | ASTM D5185m | 1200 | 1224 | --- | --- |
| Zinc        | ppm | ASTM D5185m | 1500 | 1470 | --- | --- |
| Sulfur      | ppm | ASTM D5185m | 6500 | 4917 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445   | 52.0 | 43.8 | --- | --- |

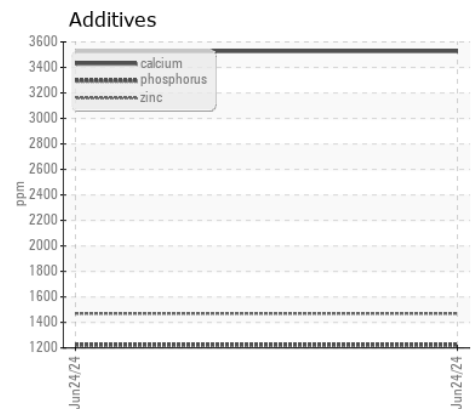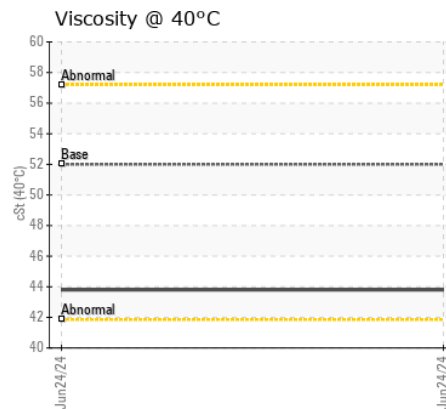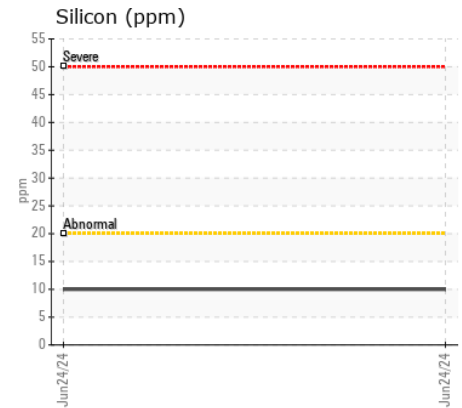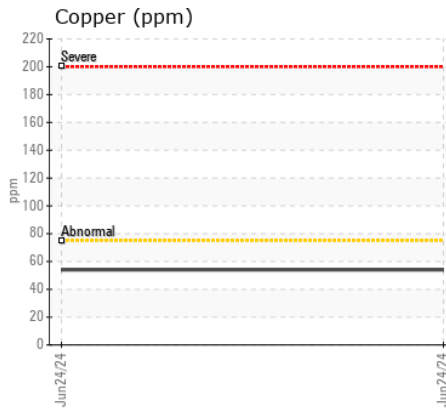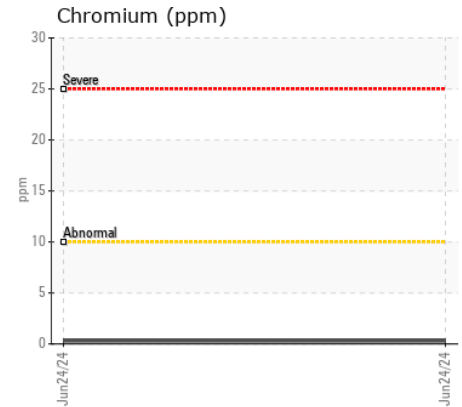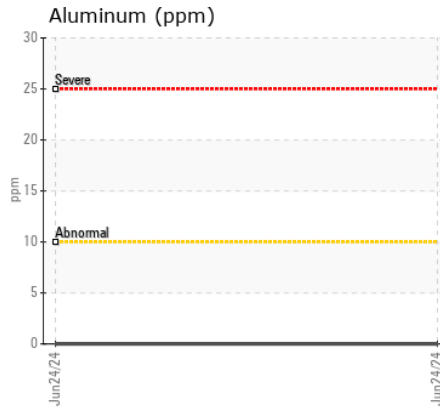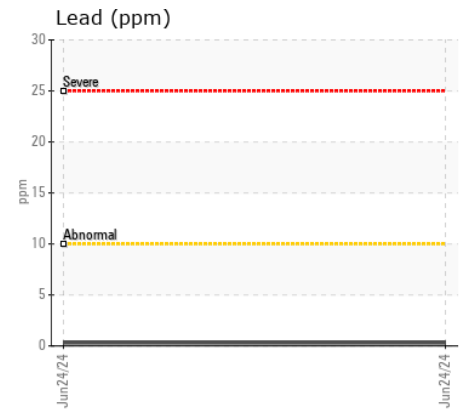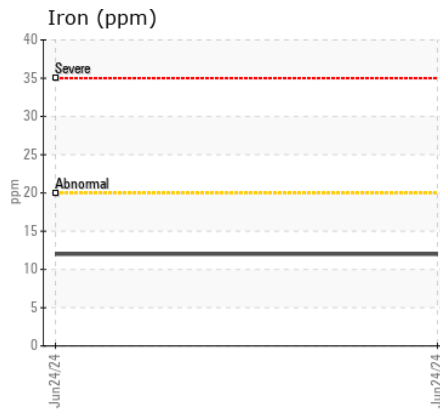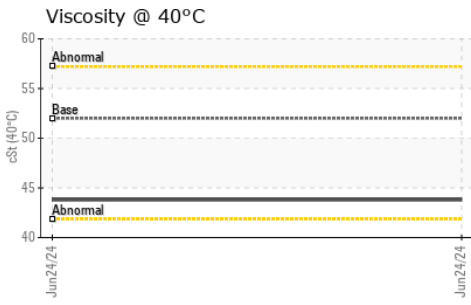

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : VCP443042

**Lab Number** : 06223798

**Unique Number** : 11101995

**Test Package** : MOB 1

**Received** : 28 Jun 2024

**Tested** : 01 Jul 2024

**Diagnosed** : 01 Jul 2024 - Don Baldridge

**ALTA EQUIPMENT COMPANY**

5210 REESE ROAD

DAVIE, FL

US 33314

Contact: N. FACEY

nfacey@altaequipfl.com

T: (954)581-4744

F: (954)583-0318

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)