



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**YALE BE050X033L12D Q2133B1 (S/N 06K01K76)**

Component  
**Hoisting Gearbox**

Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0037377</b>	DC0029229	---
Sample Date		Client Info		<b>17 Jun 2024</b>	21 Jun 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Chngd</b>	N/A	---
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>200	<b>3</b>	27	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m		<b>5</b>	0	---
Copper	ppm	ASTM D5185m		<b>8</b>	8	---
Tin	ppm	ASTM D5185m		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m		<b>1</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>5</b>	<1	---
Boron	ppm	ASTM D5185m		<b>15</b>	15	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>6</b>	5	---
Calcium	ppm	ASTM D5185m		<b>1221</b>	1198	---
Phosphorus	ppm	ASTM D5185m		<b>649</b>	652	---
Zinc	ppm	ASTM D5185m		<b>553</b>	500	---
Sulfur	ppm	ASTM D5185m		<b>13248</b>	14728	---
Visc @ 40°C	cSt	ASTM D445		<b>115</b>	133	---

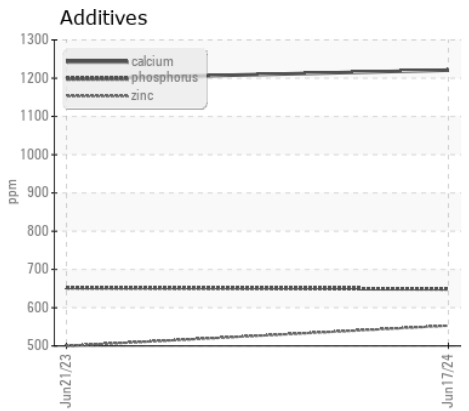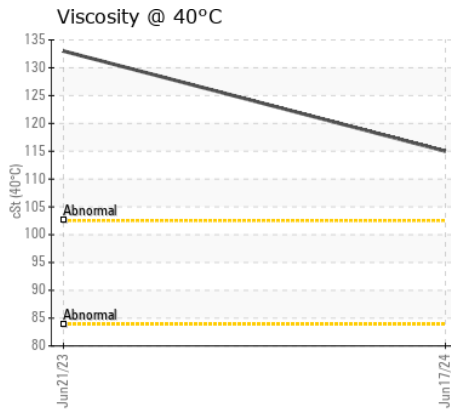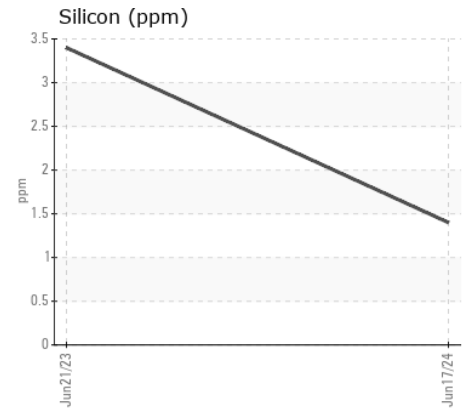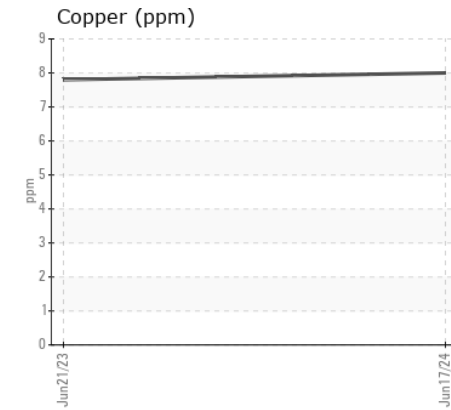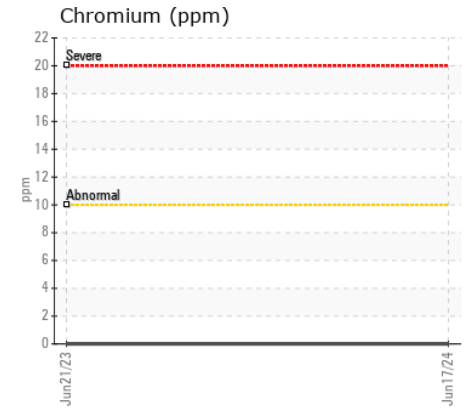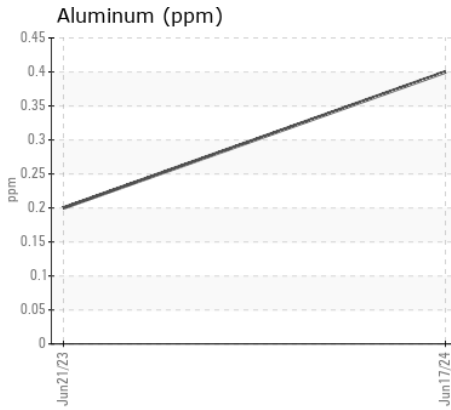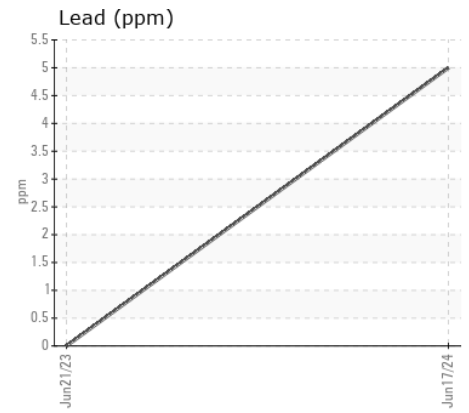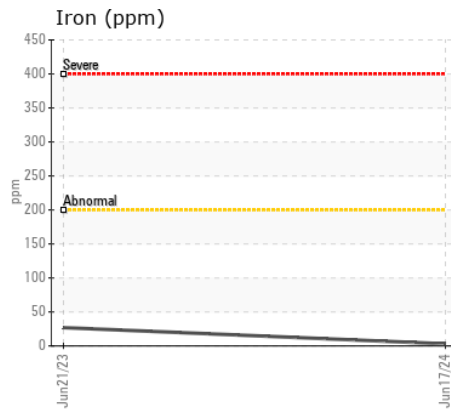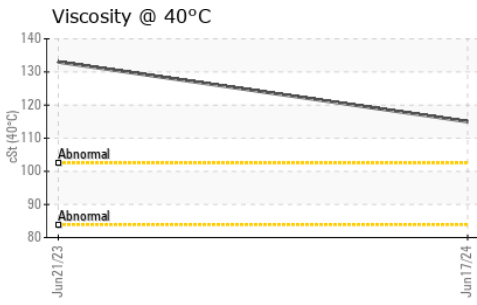

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : DC0037377

Lab Number : 06223817

Unique Number : 11102014

Test Package : MOB 1

Received : 28 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Don Baldrige

CRANWORKS INC - MID-ATLANTIC

11089 LEADBETTER ROAD

ASHLAND, VA

US 23005

Contact: JASON WILDE

jcwilde@vacranetworks.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)