



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**ACCO-WRIGHT C3W0350200-1517451 NRL563 - SOUTH BRIDGE (S/N 531-21-01787)**

Component  
**Gearbox**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0037350</b>	DC0029207	---
Sample Date		Client Info		<b>21 Jun 2024</b>	15 Jun 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>200	<b>2</b>	16	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	5	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>50	<b>10</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>3</b>	4	---
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>31</b>	57	---
Phosphorus	ppm	ASTM D5185m		<b>57</b>	320	---
Zinc	ppm	ASTM D5185m		<b>55</b>	343	---
Sulfur	ppm	ASTM D5185m		<b>14033</b>	14913	---
Visc @ 40°C	cSt	ASTM D445		<b>315</b>	386	---

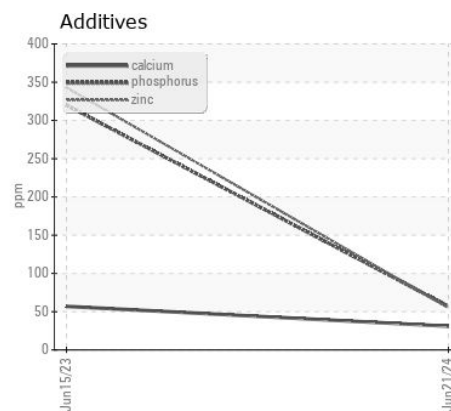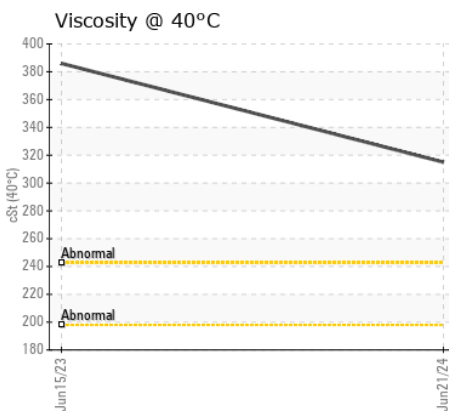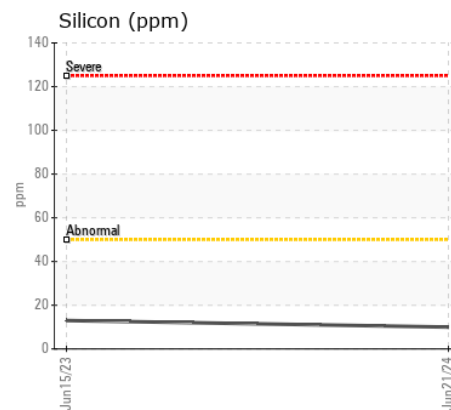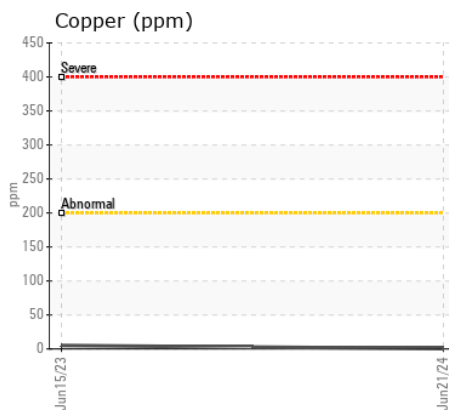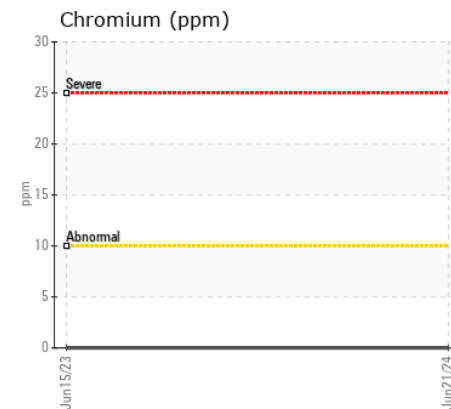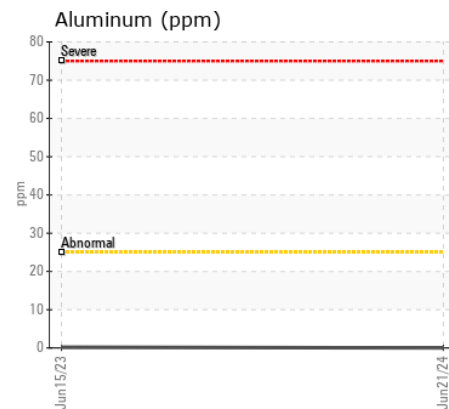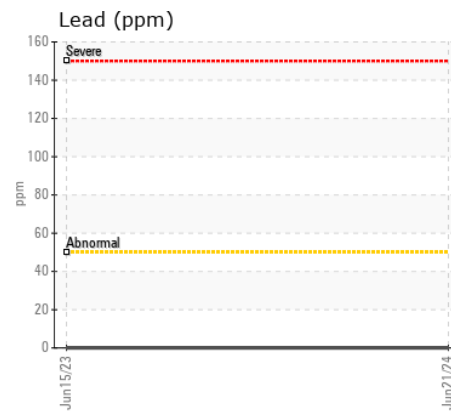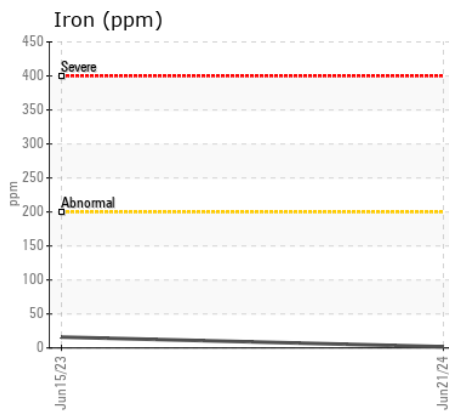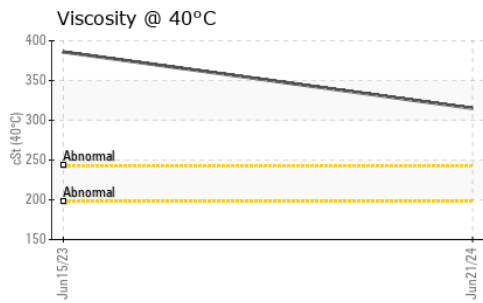

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0037350  
**Lab Number** : 06223831  
**Unique Number** : 11102028  
**Test Package** : MOB 1

**CRANWORKS INC - MID-ATLANTIC**  
 11089 LEADBETTER ROAD  
 ASHLAND, VA  
 US 23005  
 Contact: JASON WILDE  
 jcwilde@vacranetworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: